


SAW Bandpass Filter F8691



Features

- RF Bandpass Filter for Remote Control.
- Usable bandwidth of 2 MHz
- No impedance matching require for operation at 50 Ω
- Ceramic Surface Mounted Device Package (3.0 mm * 3.0 mm)
- Single-ended Operation
- RoHS Compliant

Package Dimensions

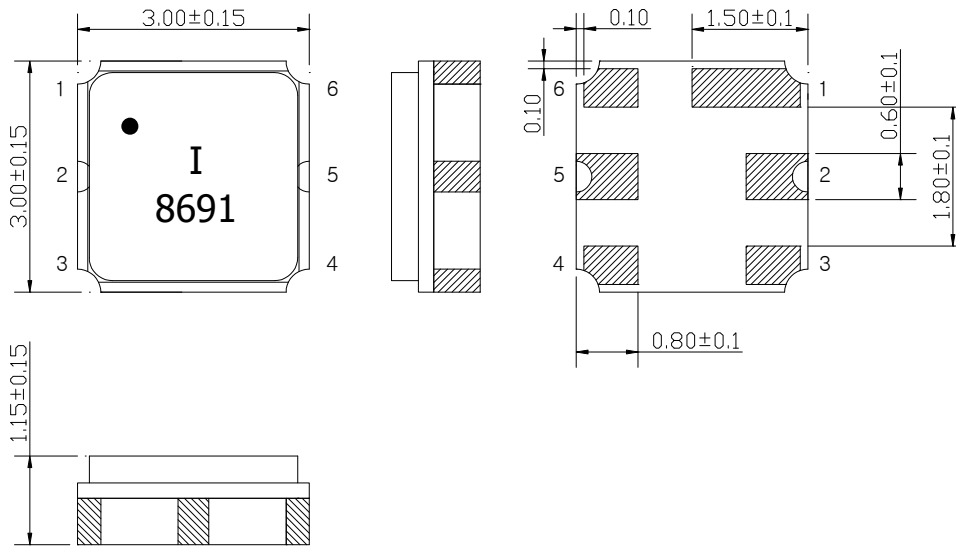

Dimensions shown are nominal in millimeters

Body : Al_2O_3 Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configurations

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-10	25	60
Storage Temperature Range	℃	-40	-	85
Power Handling Capability	dBm	-	-	17

Electrostatics Sensitive Device (ESD)


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	1/7

Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency (Fc)	-	869.0	-	MHz
Insertion Loss (In Fc +/- 1.0 MHz)	-	2.8	4.0	dB
Amplitude Ripple (In Fc +/- 1.0 MHz)	-	0.2	1.5	dBp-p
VSWR (In Fc +/- 1.0 MHz)	-	1.5	2.3	
Relative Attenuation				
825.0 MHz ~ 828.0 MHz	40.0	47.0	-	dB
835.0 MHz ~ 842.0 MHz	30.0	39.0	-	
891.0 MHz ~ 894.0 MHz	30.0	42.0	-	
910.0 MHz ~ 913.0 MHz	40.0	47.0	-	
Temperature Range (Operational)	-10	25	60	°C
Input RF Power (In Fc +/- 1.0 MHz)			17	dBm
Input/Output Impedance		50		Ohms

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	2/7

SAW Bandpass Filter F8691



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)




Marking Configuration

●¹⁾
I²⁾
8691³⁾

- 1) Pad Number 1 Index
- 2) Manufacturer name
- 3) Marking Number



* Ink or Laser Marking available

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	3/7

SAW Bandpass Filter F8691



Typical Performance (at 25°C)

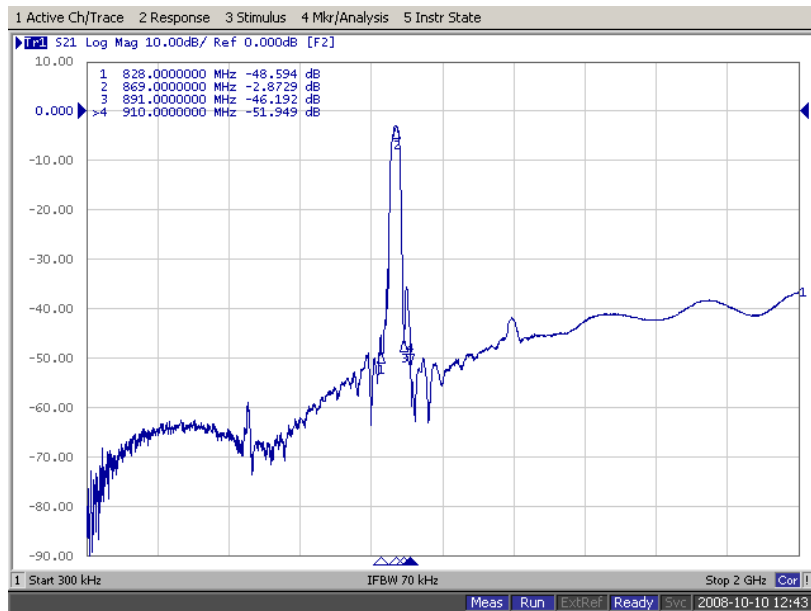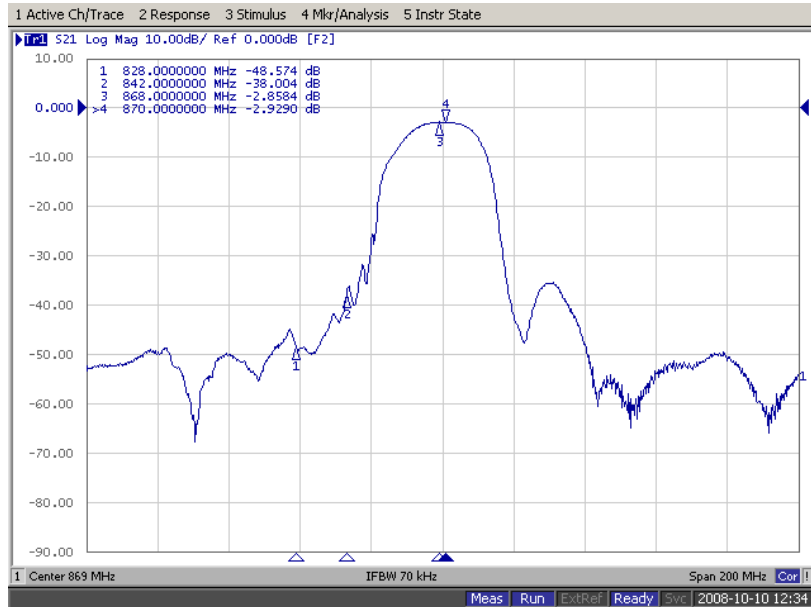


	<p align="center">ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809</p>	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	4/7



SAW Bandpass Filter F8691



Input / Output VSWR Charts

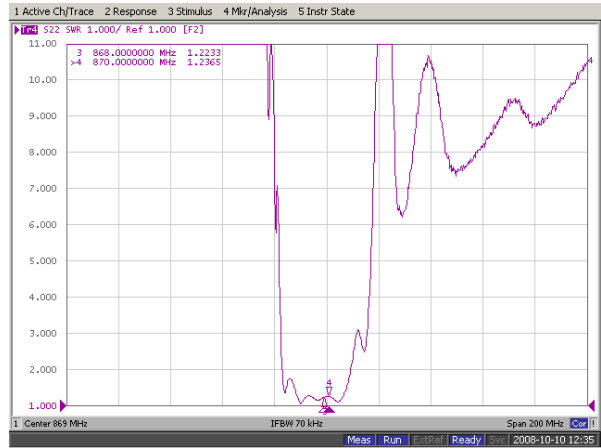


Input / Output Smith Charts

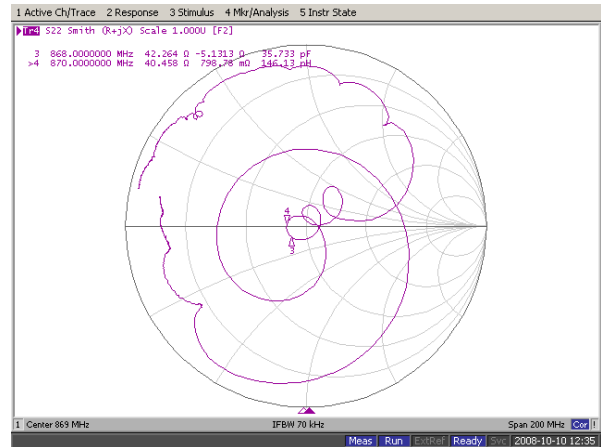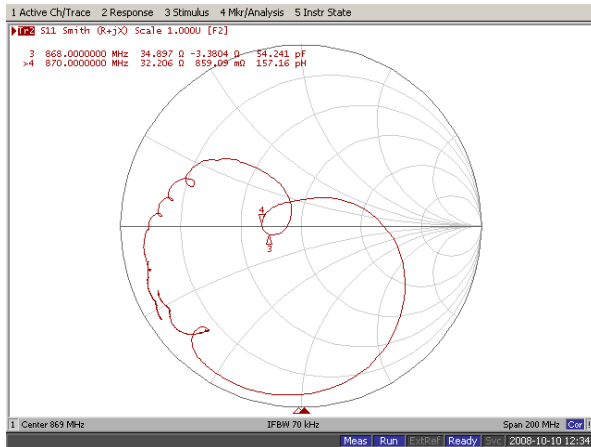

	<p align="center">ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809</p>	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	5/7


Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

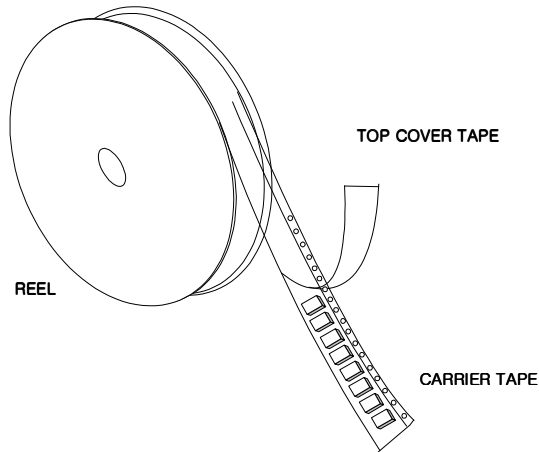

Tape Specification

1. Leader part and vacant position specification

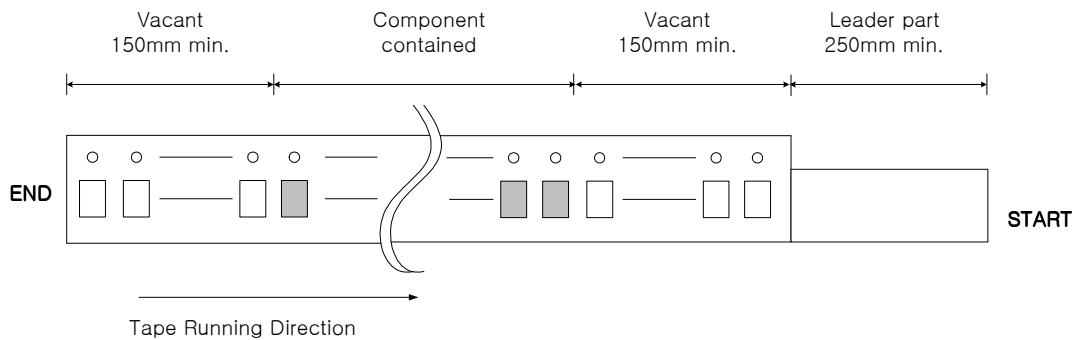


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

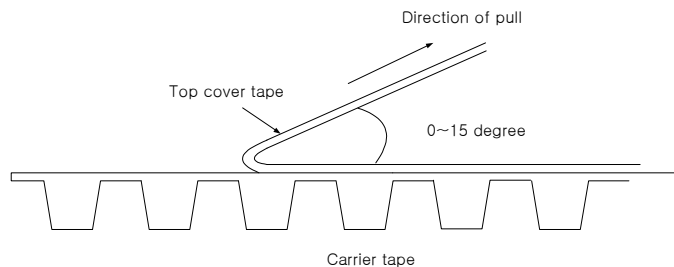


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	6/7

SAW Bandpass Filter F8691




Carrier Tape Dimensions [unit : mm]

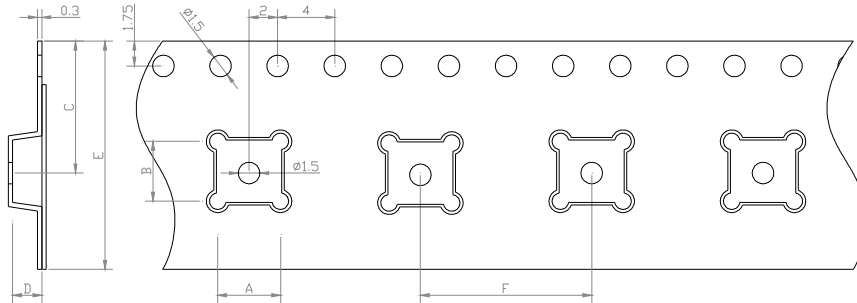


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

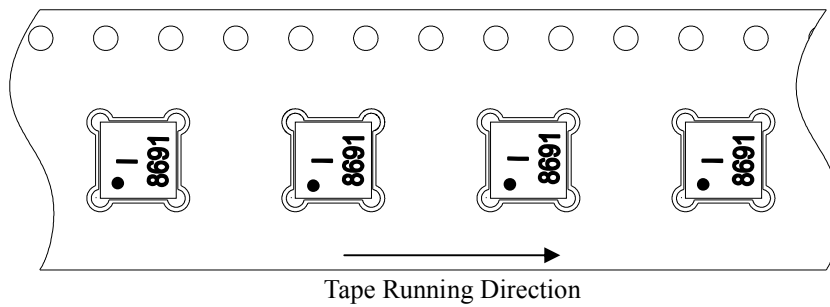

Reel Dimensions [unit : mm]

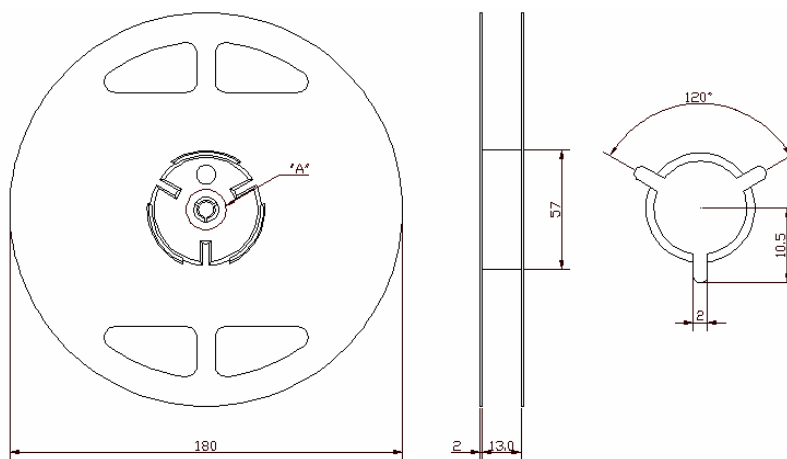

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8691	
		Rev. Date	2008-10-28	
		Rev.	NC8013-PS01	7/7