

1. Features

- Typical 1dB bandwidth of 1.4 MHz
- High attenuation
- Single Ended Operation
- Dual In-line Package (DIP)

RoHS Compliant

Tested by SGS Testing Korea


2. Electrical Specifications

Source and Load Impedance = 50Ω


Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	87.2	87.3	87.4
Insertion Loss	dB	-	23.5	25.5
1dB Bandwidth	MHz	-	1.43	-
3dB Bandwidth	MHz	1.45	1.62	-
30B Bandwidth	MHz	-	2.32	-
50dB Bandwidth	MHz	-	2.53	2.7
Amplitude Ripple (fo ± 0.625 MHz)	dB	-	0.35	1.5
Group Delay Variation (fo ± 0.625 MHz)	nsec	-	150	300
Absolute Delay	usec	-	3.76	4.0
Relative Attenuation (fo ± 10MHz)	dBc	50	55	
Ultimate Rejection	dB	50	55	
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Input POWER : +10dBm

D3512 Package Dimension

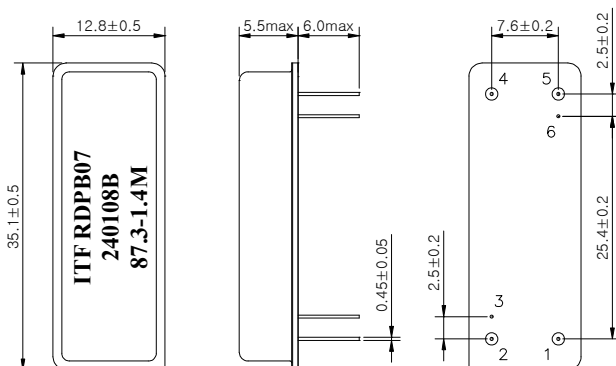

Matching Network Configuration

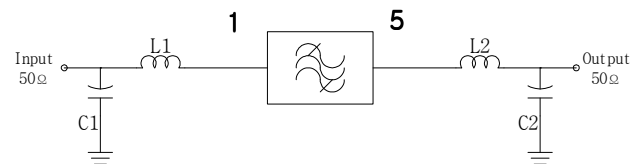

L1 = 120nH, L2 = 150nH

C1 = 68pF, C2 = 82pF

Pin Configuration			
Input	1	Ground	2, 4
Output	5	Others	Ground

3. Typical Performance (at +25°C)

