


SAW Bandpass Filter 202163C



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

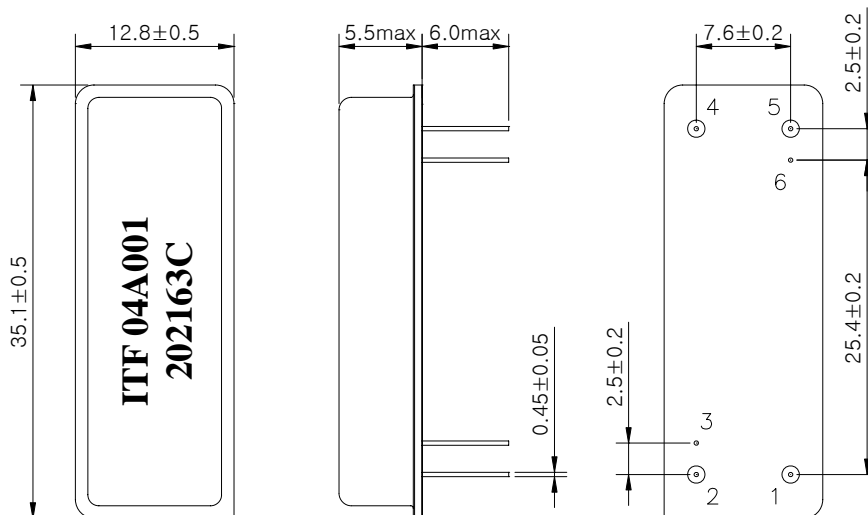

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

| Pin Configuration | |
|-------------------|-------------|
| 1 | Input |
| 5 | Output |
| 2, 4 | Ground |
| 3, 6 | Case ground |

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 202163C | |
| | | Rev. Date | 2004-05-11 | |
| | | Rev. | NI2023-CS03 | 1/5 |

SAW Bandpass Filter 202163C



3. Specifications

Fo = 70.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

| | | Minimum | Typical | Maximum |
|--|--------|---------|---------|---------|
| Center Frequency | MHz | 69.94 | 70.0 | 70.06 |
| Insertion Loss | dB | - | 22.5 | 25.0 |
| 1dB Bandwidth | MHz | - | 10.35 | - |
| 3dB Bandwidth | MHz | 10.5 | 10.65 | - |
| 40dB Bandwidth | MHz | - | 11.75 | 11.85 |
| Amplitude Ripple (Fo +/- 5.0 MHz) | dB | - | 0.7 | 1.0 |
| Group Delay Variation (Fo +/- 5.0 MHz) | nsec | - | 60 | 150 |
| Absolute Delay | usec | - | 2.88 | - |
| Ultimate Rejection | dB | 50 | 55 | - |
| Temperature Coefficient of Frequency | ppm/°C | - | -72 | - |

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 202163C | |
| | | Rev. Date | 2004-05-11 | |
| | | Rev. | NI2023-CS03 | 2/5 |

SAW Bandpass Filter 202163C



4. Matching Schematic


(Actual matching values may vary due to PCB layout and parasitics)

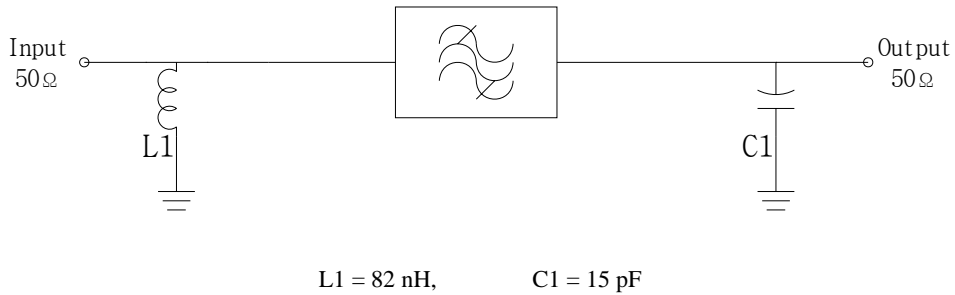

5. Marking Configuration

ITF¹⁾04A001²⁾
202163C³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 202163C | |
| | | Rev. Date | 2004-05-11 | |
| | | Rev. | NI2023-CS03 | 3/5 |

SAW Bandpass Filter 202163C



6. Typical Performance (at +25°C)

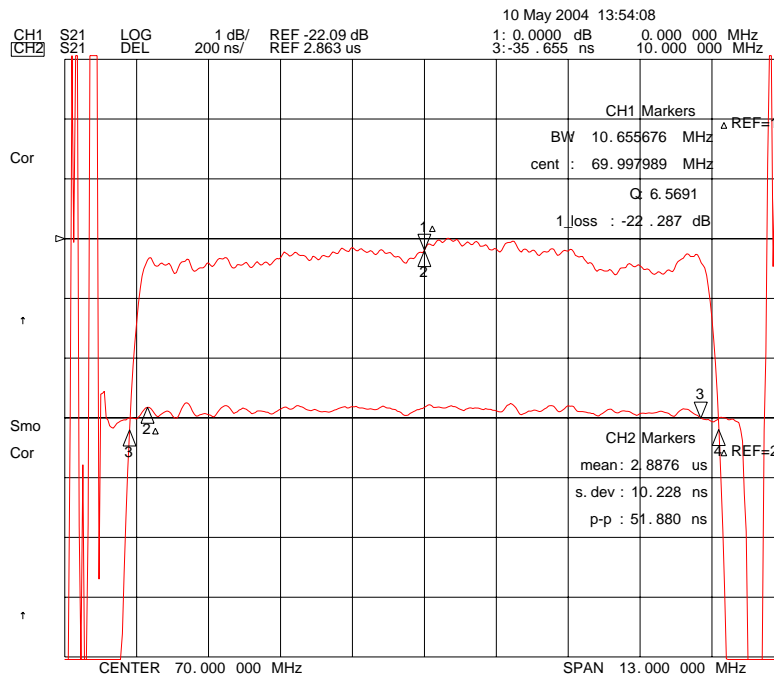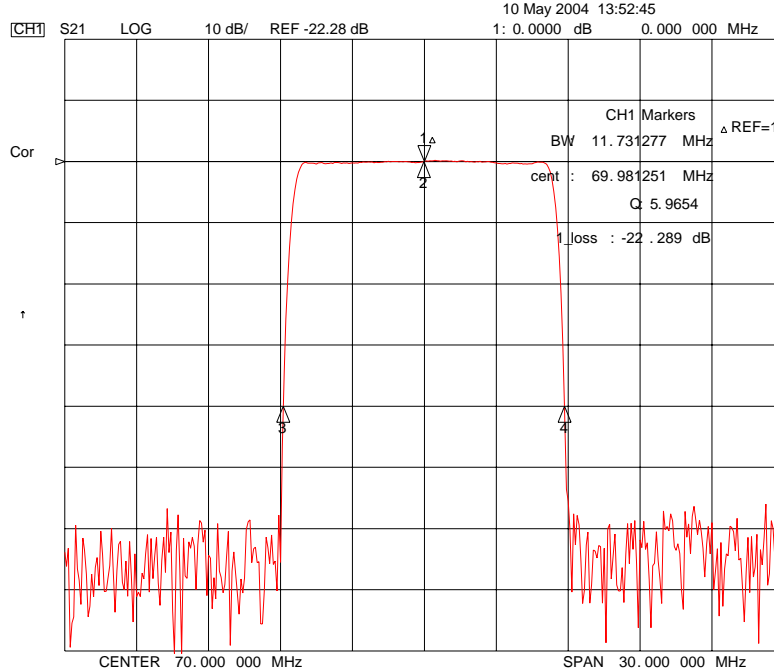





ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No. 202163C

Rev. Date 2004-05-11

Rev. NI2023-CS03 4/5

SAW Bandpass Filter 202163C

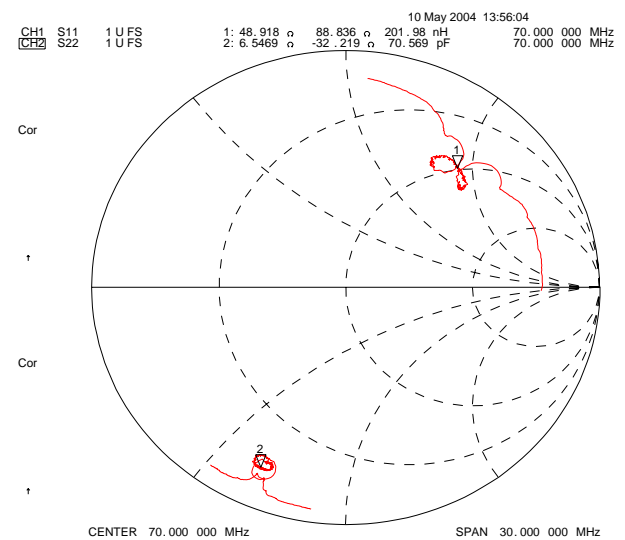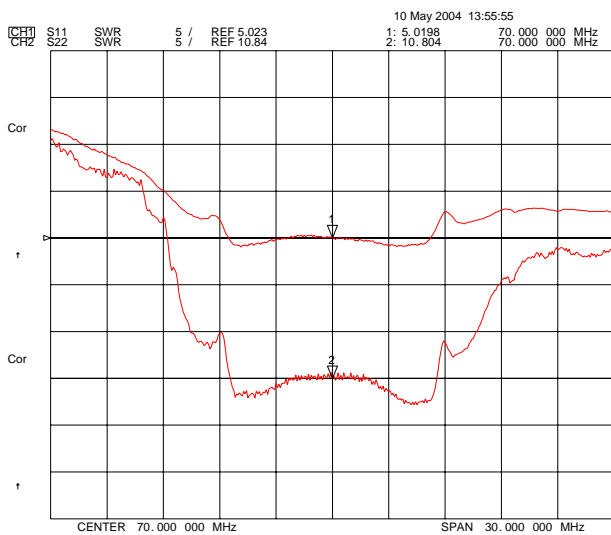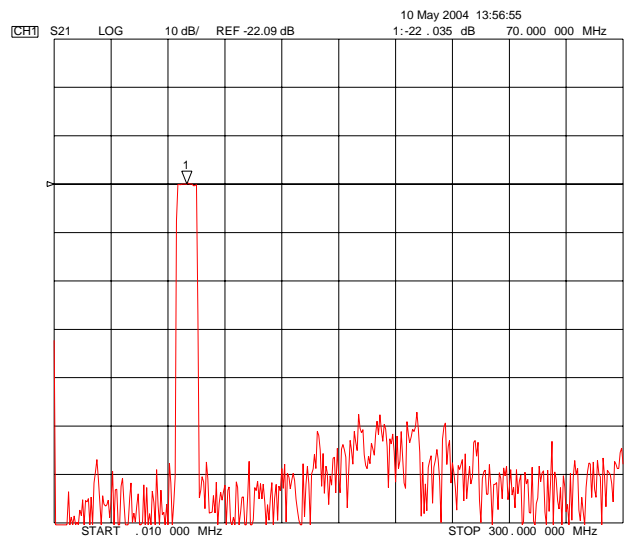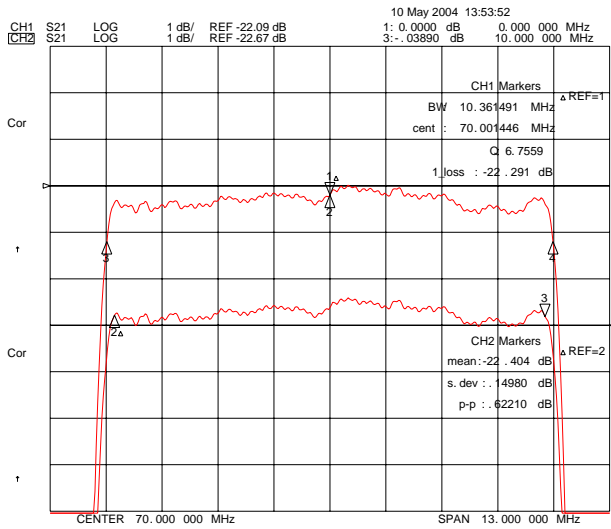

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

| | | |
|-----------|-------------|-----|
| Part No. | 202163C | |
| Rev. Date | 2004-05-11 | |
| Rev. | NI2023-CS03 | 5/5 |