


# SAW Bandpass Filter 240551B



## 1. Features

- IF Bandpass Filter
- Low-Loss Filter
- Single-Ended Operation
- Ceramic Surface Mount Device (SMD) Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimensions

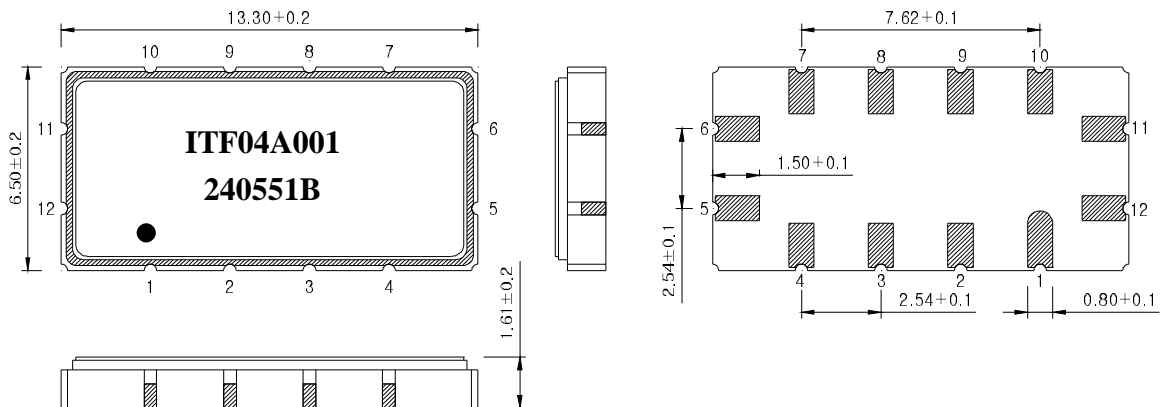

**Package : S1365**

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pad Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240551B	
		Rev. Date	2004-06-24	
		Rev.	NJ4010-CS01	1/5

# SAW Bandpass Filter 240551B



## 3. Specifications

Fo = 81.25 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating Temperature Range : -30℃ ~ +85℃		Minimum	Typical	Maximum
Center Frequency	MHz	80.65	81.25	81.85
Insertion Loss	dB	-	6.6	8.0
1dB Bandwidth	MHz	4.5	4.8	-
3dB Bandwidth	MHz	5.4	5.6	-
40dB Bandwidth	MHz	-	8.2	8.7
Amplitude Ripple (Fo +/- 2.0 MHz)	dB	-	0.7	1.0
Group Delay Variation (Fo +/- 2.0 MHz)	nsec	-	80	140
Absolute Delay	usec	-	1.1	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	81.05	81.25	81.85
Amplitude Ripple (Fo +/- 3.2 MHz)	dB	-	0.7	1.0
Group Delay Variation (Fo +/- 3.2 MHz)	nsec	-	80	140

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240551B	
		Rev. Date	2004-06-24	
		Rev.	NJ4010-CS01	2/5

# SAW Bandpass Filter 240551B



## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

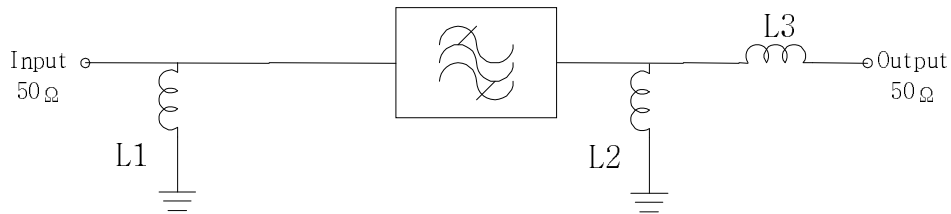

L1 = 100 nH,      L3 = 82 nH  
L2 = 120 nH

## 5. Marking Configuration

ITF<sup>1)</sup> 04A001<sup>2)</sup>

240551B<sup>3)</sup>

●<sup>4)</sup>

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240551B	
		Rev. Date	2004-06-24	
		Rev.	NJ4010-CS01	3/5

# SAW Bandpass Filter 240551B








## 6. Typical Performance ( at +25°C )

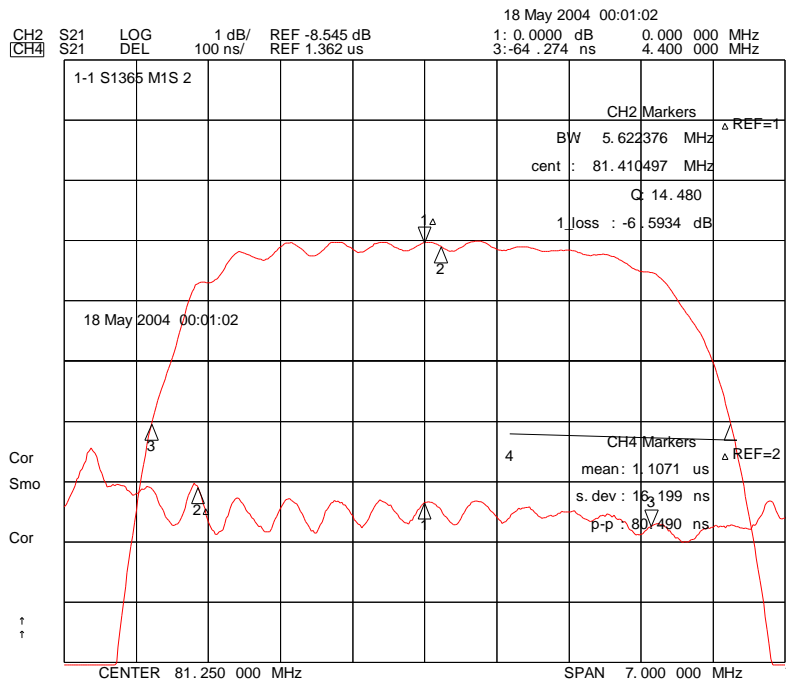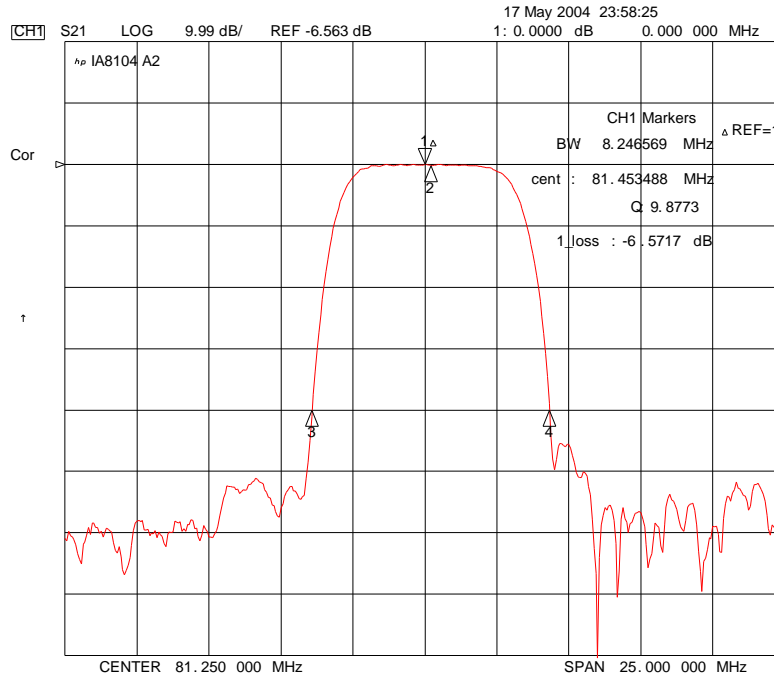

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240551B	
		Rev. Date	2004-06-24	
		Rev.	NJ4010-CS01	4/5

# SAW Bandpass Filter 240551B

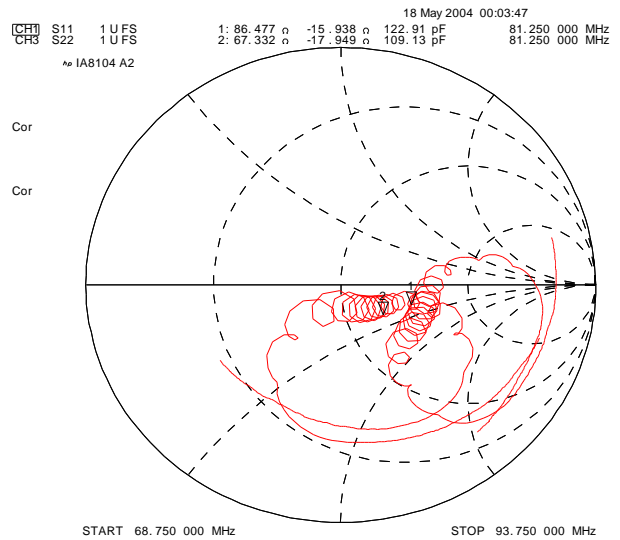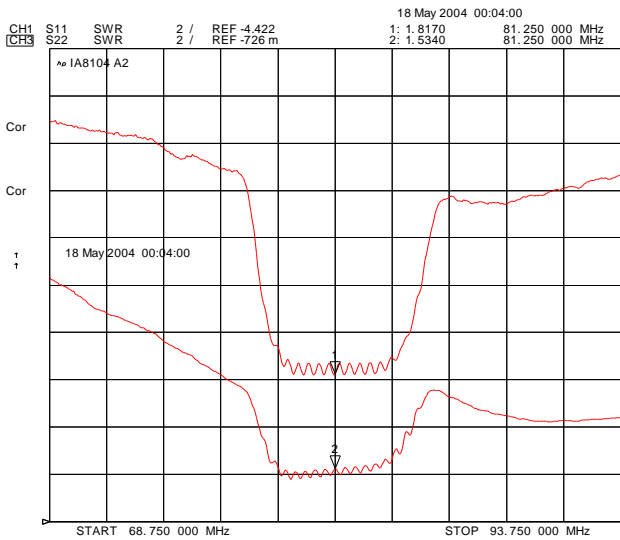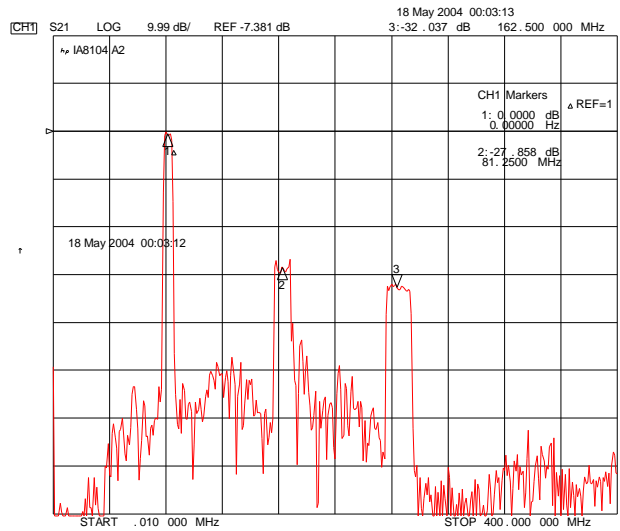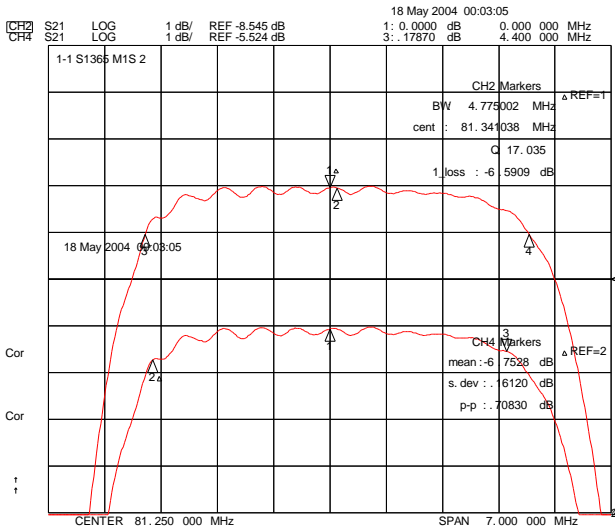

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	240551B	
Rev. Date	2004-06-24	
Rev.	NJ4010-CS01	5/5