


Bandpass Filter 220451B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

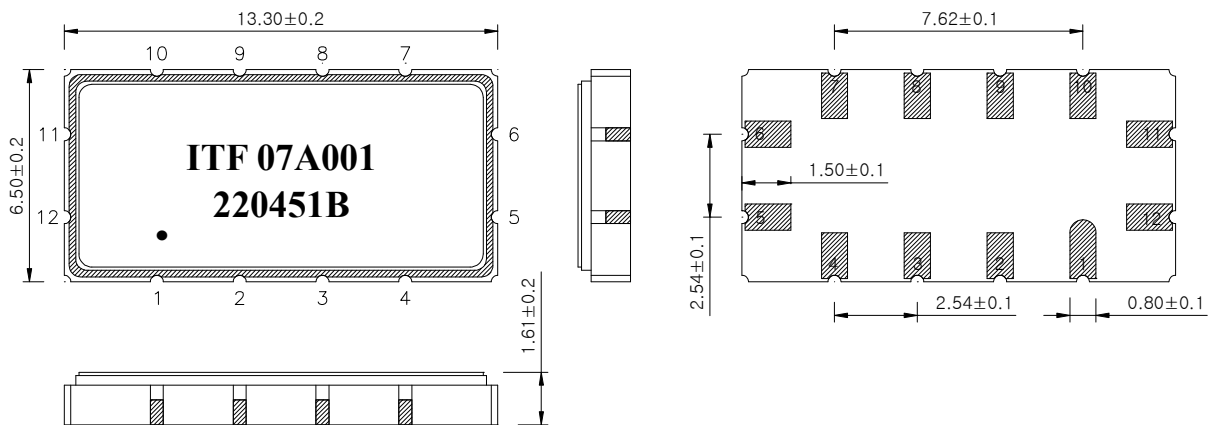

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220451B	
		Rev. Date	2007-09-04	
		Rev.	NJ7011-CS01	1/5

Bandpass Filter 220451B



3. Specifications


F_o = 62.5 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -30℃ ~ +50℃		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	62.5	-
Insertion Loss	dB	-	14.0	17.0
1dB Bandwidth	MHz	4.0	4.23	-
3dB Bandwidth	MHz	-	4.7	-
5dB Bandwidth	MHz	-	4.98	5.2
40dB Bandwidth	MHz	-	6.6	7.0
Amplitude Ripple (Fo +/- 1.92 MHz)	dB	-	0.4	1.0
Group Delay Variation (Fo +/- 1.92 MHz)	nsec	-	60	100
Absolute Delay	usec	-	1.68	-
Temperature Coefficient of Frequency (TCF)	ppm/℃	-	- 18	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	62.5	-
Insertion Loss	dB	-	14.0	16.5
Amplitude Ripple (Fo +/- 2.0 MHz)	dB	-	0.65	1.0
Group Delay Variation (Fo +/- 2.0 MHz)	nsec	-	60	100
Relative Attenuation Fc ± 4.0 MHz	dB	50	55	-

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220451B	
		Rev. Date	2007-09-04	
		Rev.	NJ7011-CS01	2/5

Bandpass Filter 220451B




Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss

4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

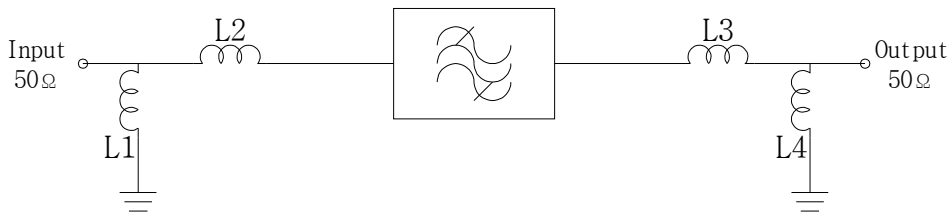

$$L1 = 47 \text{ nH}, \quad L4 = 33 \text{ nH}$$
$$L2 = L3 = 27 \text{ nH}$$


5. Marking Configuration

ITF¹⁾07A001²⁾

220451B³⁾

●⁴⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Pad Number 1 Index

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220451B	
		Rev. Date	2007-09-04	
		Rev.	NJ7011-CS01	3/5

Bandpass Filter 220451B







6. Typical Performance (at +25°C)

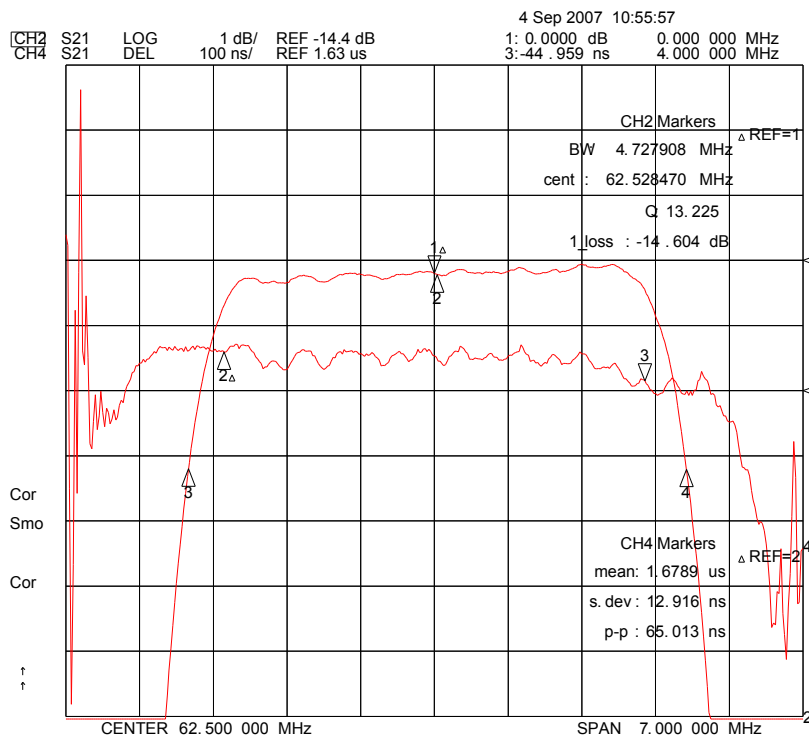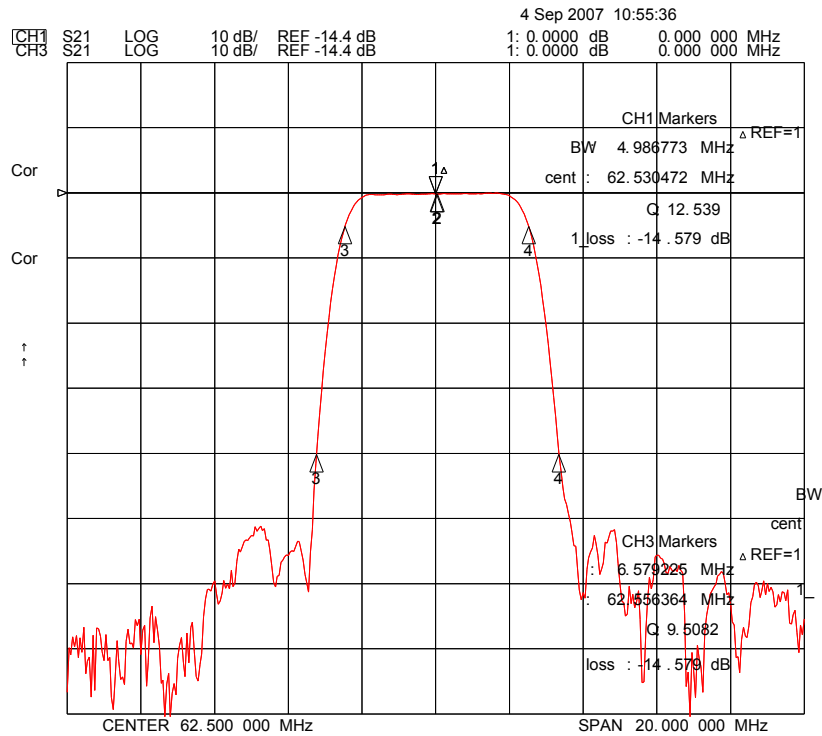

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	220451B	
Rev. Date	2007-09-04	
Rev.	NJ7011-CS01	4/5

Bandpass Filter 220451B

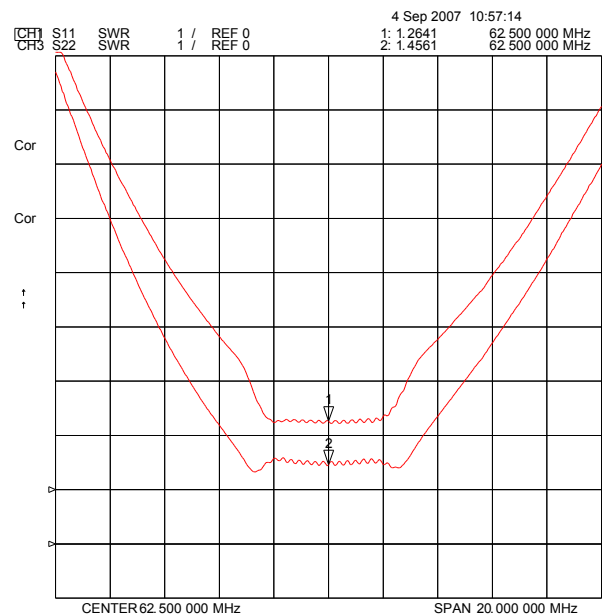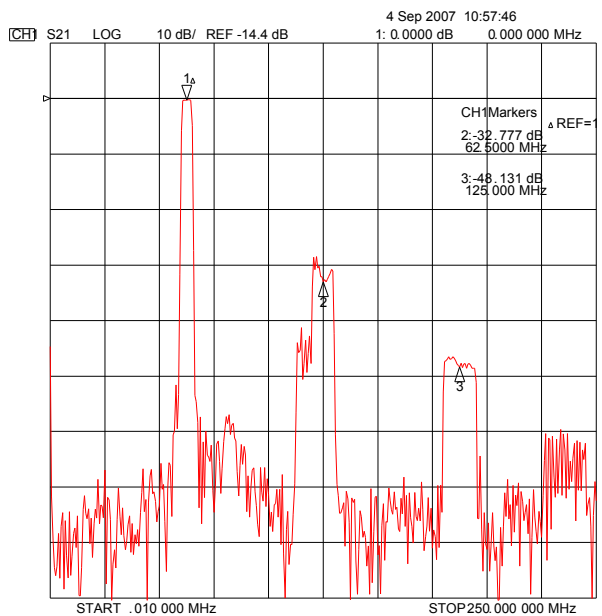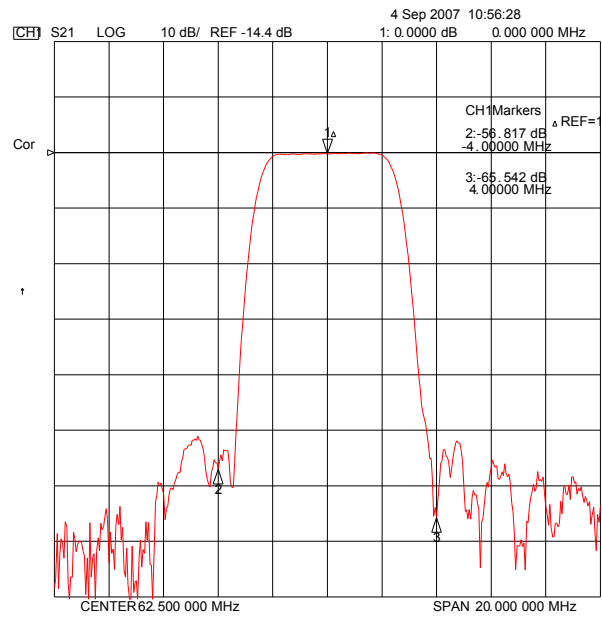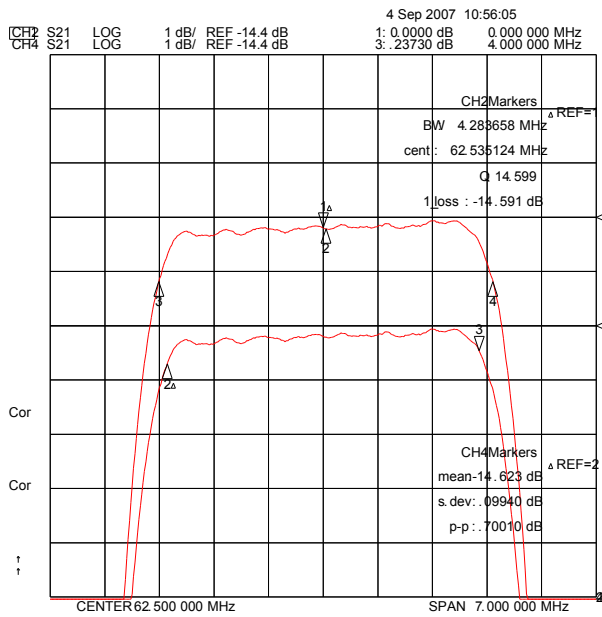

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	220451B	
Rev. Date	2007-09-04	
Rev.	NJ7011-CS01	5/5