


Bandpass Filter 252252B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

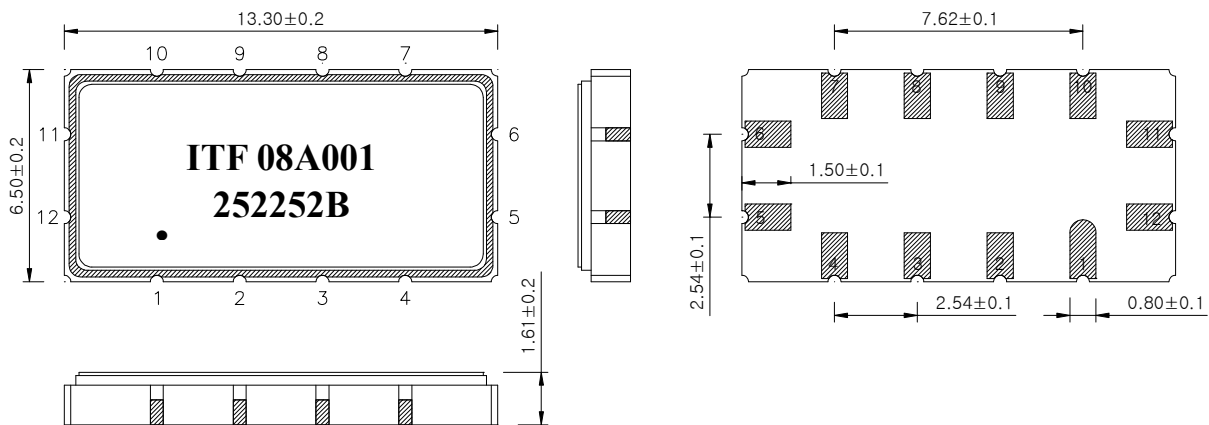

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252252B	
		Rev. Date	2008-02-27	
		Rev.	NJ8002-AS01	1/5

Bandpass Filter 252252B



3. Specifications

F_o = 120.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10℃ ~ +60℃		Minimum	Typical	Maximum
Center Frequency (F _c)	MHz	-	120.0	-
Insertion Loss	dB	-	12.0	15.0
1dB Bandwidth	MHz	20.5	21.0	-
3dB Bandwidth	MHz	-	22.0	-
40dB Bandwidth	MHz	-	26.2	27.0
Amplitude Ripple (F _o +/- 9.63 MHz)	dB	-	0.4	0.9
Group Delay Variation (F _o +/- 9.63 MHz)	nsec	-	40	80
Absolute Delay	usec	-	0.9	-
Temperature Coefficient of Frequency (TCF)	ppm/℃	-	- 86	-

Room temperature : + 25 ℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	120.0	-
Insertion Loss	dB	-	12.0	14.5
Amplitude Ripple (F _o +/- 10.0 MHz)	dB	-	0.4	0.9
Group Delay Variation (F _o +/- 10.0 MHz)	nsec	-	40	80

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252252B	
		Rev. Date	2008-02-27	
		Rev.	NJ8002-AS01	2/5

Bandpass Filter 252252B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

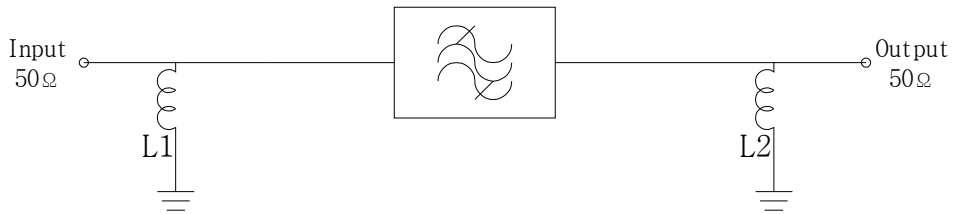

L1 = 18 nH, L2 = 27 nH

5. Marking Configuration

ITF¹⁾ 08A001²⁾

252252B³⁾


●⁴⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252252B	
		Rev. Date	2008-02-27	
		Rev.	NJ8002-AS01	3/5

Bandpass Filter 252252B







6. Typical Performance (at +25°C)

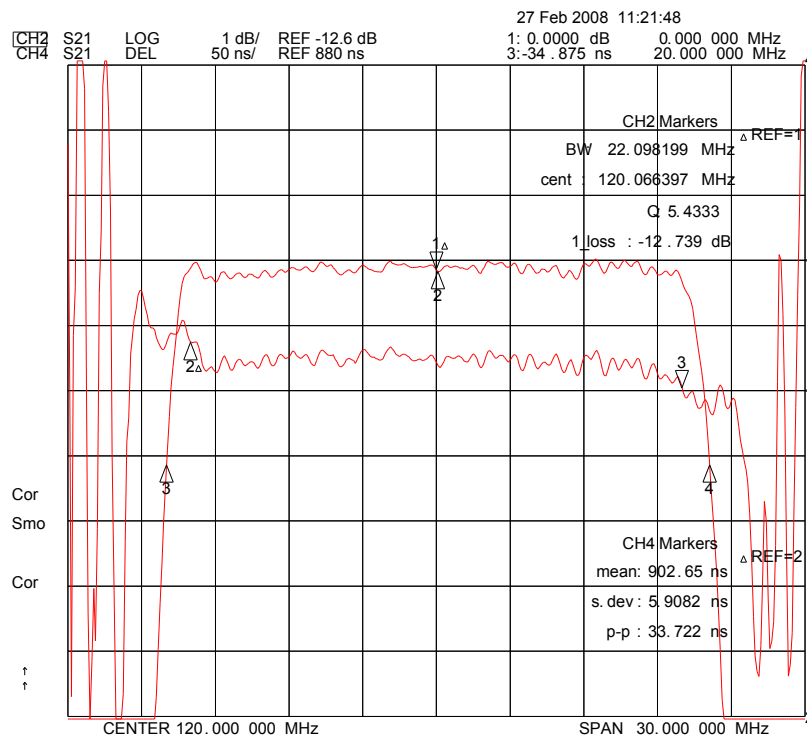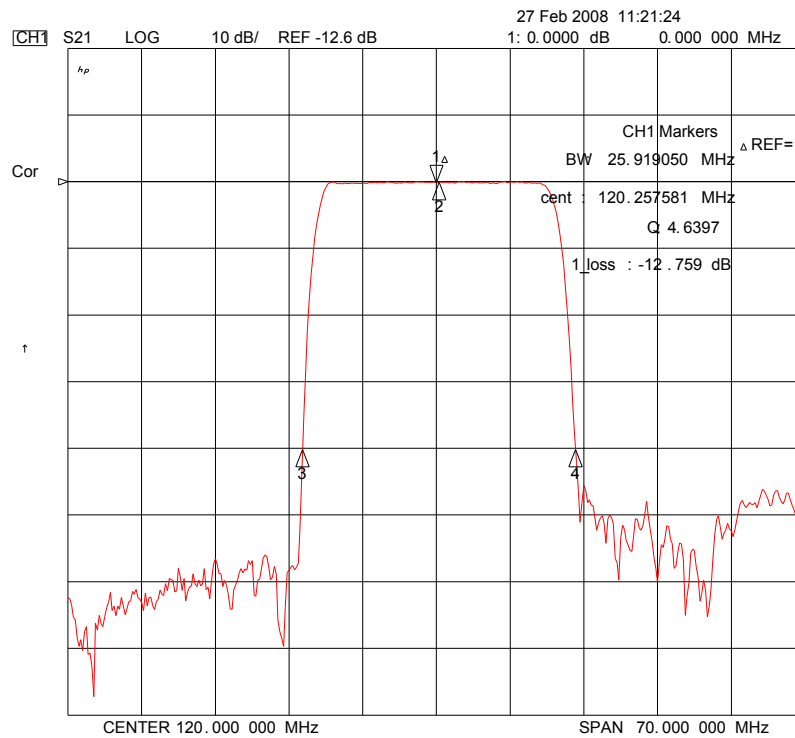

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	252252B	
Rev. Date	2008-02-27	
Rev.	NJ8002-AS01	4/5

Bandpass Filter 252252B

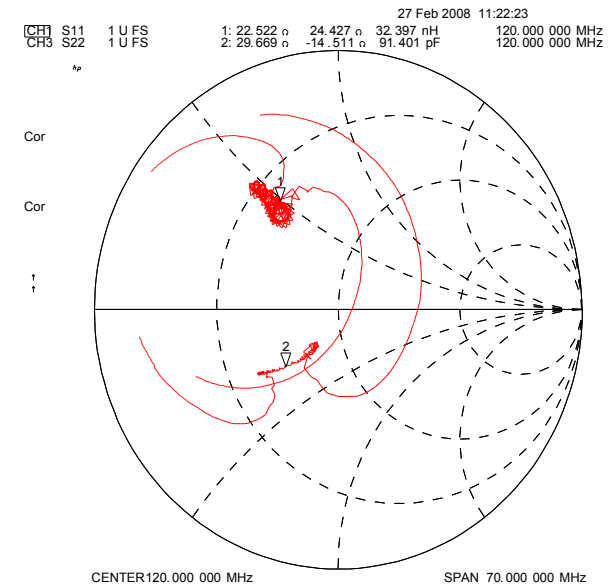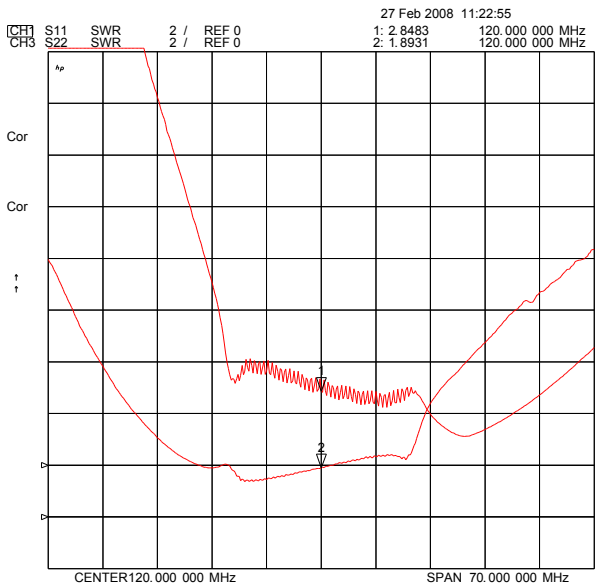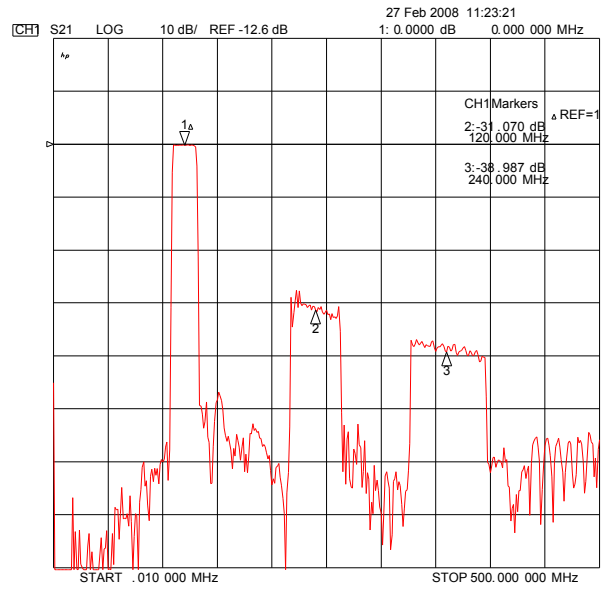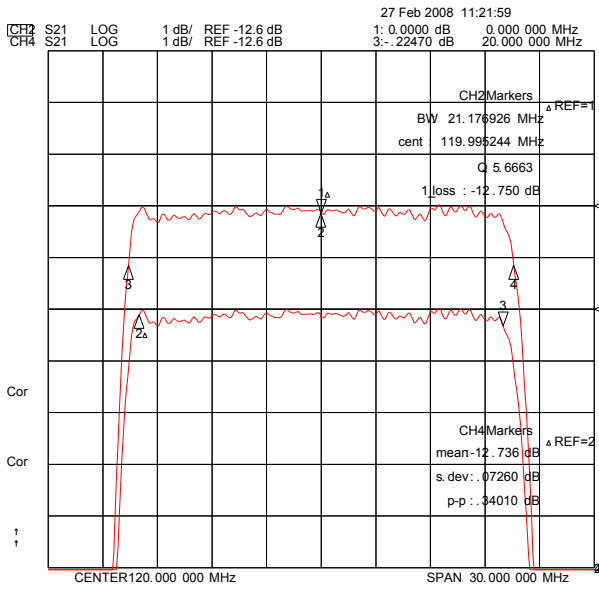

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	252252B	
Rev. Date	2008-02-27	
Rev.	NJ8002-AS01	5/5