

1. Features

- Typical 1dB bandwidth of 10.5 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant

Tested by SGS Testing Korea


2. Electrical Specifications

Source and Load Impedance = 50Ω

Operating Temperature : -10℃ ~ +50℃		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	140.0	-
Insertion Loss	dB	-	17.5	20.0
1dB Bandwidth	MHz	10.0	10.5	-
3dB Bandwidth	MHz	-	11.25	-
40dB Bandwidth	MHz	-	14.0	14.6
Amplitude Ripple (fo ± 4.5 MHz)	dB	-	0.35	1.0
Group Delay Variation (fo ± 4.5 MHz)	nsec	-	35	80
Absolute Delay	usec	-	1.15	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/℃	-	-18	-

Room Temperature : +25℃		Minimum	Typical	Maximum
Insertion Loss	dB	-	17.5	19.5
Amplitude Ripple (fo ± 4.6 MHz)	dB	-	0.35	1.0
Group Delay Variation (fo ± 4.6 MHz)	nsec	-	35	80

S1365 Package Dimension

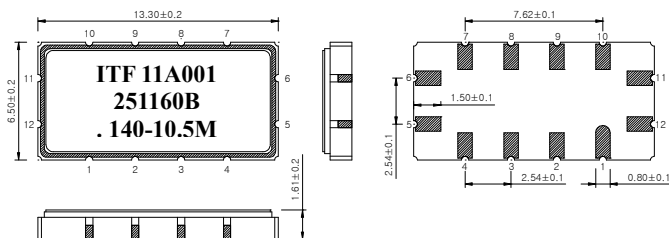


Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Matching Schematic

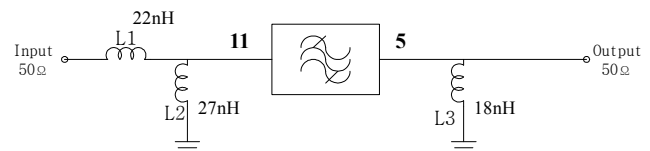

Pin Configuration

Pin Configuration			
Input	11	Ground	6, 12
Output	5	Others	Ground

3. Typical Performance (at +25°C)

