

1. Features

- Typical 1dB bandwidth of 5.95 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant


Tested by SGS Testing Korea

2. Electrical Specifications


Source and Load Impedance = 50Ω

Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	140.0	-
Insertion Loss	dB	-	7.0	9.0
1dB Bandwidth	MHz	5.5	5.95	-
3dB Bandwidth	MHz	-	7.05	-
40dB Bandwidth	MHz	-	10.6	10.8
Amplitude Ripple (fo ± 2.4 MHz)	dB	-	0.4	0.8
Group Delay Variation (fo ± 2.4 MHz)	nsec	-	55	100
Absolute Delay	usec	-	0.82	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

S1365 Package Dimension

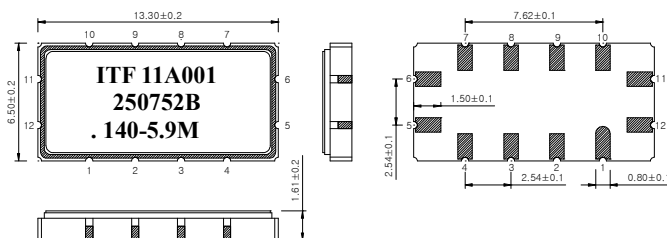

Matching Schematic

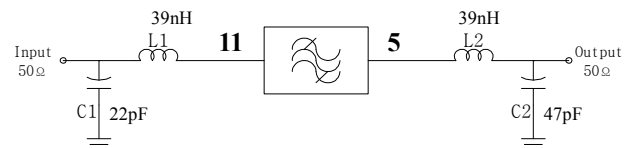

Pin Configuration

Pin Configuration			
Input	11	Ground	6, 12
Output	5	Others	Ground

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

3. Typical Performance (at +25°C)

