

1. Features

- Typical 1dB bandwidth of 14.85 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant

Tested by SGS Testing Korea


2. Electrical Specifications

Source and Load Impedance = 50


Room Temperature : +25°C

		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	67.5	-
Insertion Loss	dB	-	11.5	13.5
1dB Bandwidth	MHz	14.4	14.85	-
3dB Bandwidth	MHz	-	15.56	-
40dB Bandwidth	MHz	-	18.5	19.0
Amplitude Ripple (fo ± 7.0 MHz)	dB	-	0.4	1.0
Group Delay Variation (fo ± 7.0 MHz)	nsec	-	50	100
Absolute Delay	usec	-	1.26	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

S1365 Package Dimension

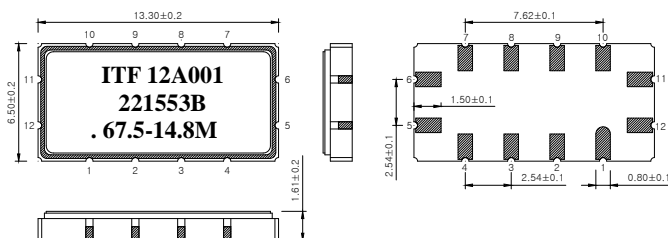

Matching Schematic

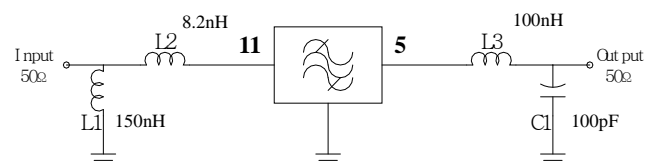

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration

Pin Configuration			
Input	11	Ground	6, 12
Output	5	Others	Ground

3. Typical Performance (at +25)

