

## 1. Features

- Typical 1dB bandwidth of 19.75 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

**RoHS Compliant**

Tested by SGS Testing Korea


## 2. Electrical Specifications

Source and Load Impedance = 50


Operating Temperature : -10°C ~ +40°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	62.5	-
Insertion Loss	dB	-	15.6	18.0
1dB Bandwidth	MHz	19.3	19.75	-
3dB Bandwidth	MHz	-	20.5	-
40dB Bandwidth	MHz	-	24.0	24.5
Amplitude Ripple (fo ± 9.22 MHz)	dB	-	0.4	1.0
Group Delay Variation (fo ± 9.22 MHz)	nsec	-	30	60
Absolute Delay	usec	-	0.98	1.0
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

Room Temperature : +25°C		Minimum	Typical	Maximum
Insertion Loss	dB	-	15.6	17.5
Amplitude Ripple (fo ± 9.36 MHz)	dB	-	0.4	1.0
Group Delay Variation (fo ± 9.36 MHz)	nsec	-	30	60

### S1365 Package Dimension

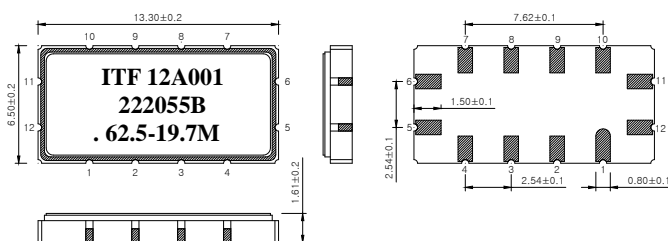

### Matching Schematic

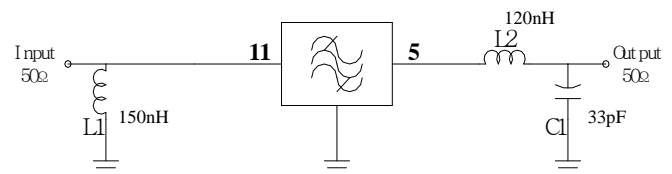

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub>

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

### Pin Configuration

Pin Configuration			
Input	11	Ground	6, 12
Output	5	Others	Ground

### 3. Typical Performance ( at +25 )

