


SAW Bandpass Filter 222101B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

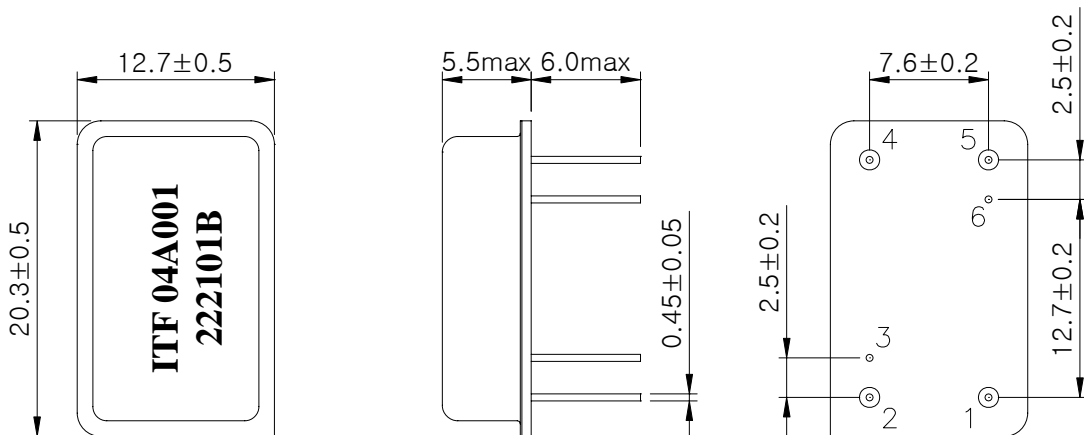

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	222101B	
		Rev. Date	2004-05-03	
		Rev.	NM4007-CS01	1/5

SAW Bandpass Filter 222101B



3. Specifications

Fo = 63.5 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10°C ~ +60°C		Minimum	Typical	Maximum
Center Frequency	MHz	63.45	63.5	63.55
Insertion Loss	dB	-	23.0	25.0
1dB Bandwidth	MHz	-	21.3	-
3dB Bandwidth	MHz	21.85	21.94	-
40dB Bandwidth	MHz	-	24.22	24.35
Amplitude Ripple (Fo +/- 9.22 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 9.22 MHz)	nsec	-	50	100
Absolute Delay	usec	-	1.7	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	222101B	
		Rev. Date	2004-05-03	
		Rev.	NM4007-CS01	2/5

SAW Bandpass Filter 222101B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

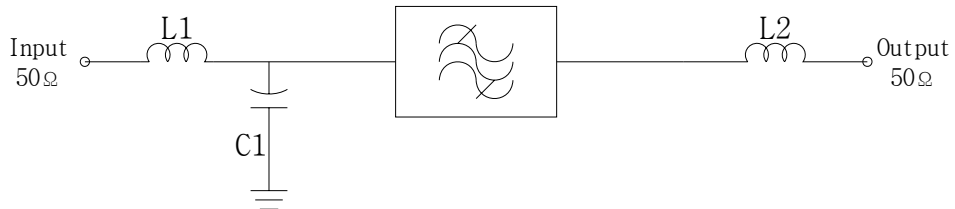


L1 = 180 nH, L2 = 220 nH
C1 = 4 pF

5. Marking Configuration

ITF¹⁾04A001²⁾
222101B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	222101B	
		Rev. Date	2004-05-03	
		Rev.	NM4007-CS01	3/5

SAW Bandpass Filter 222101B







6. Typical Performance (at +25°C)

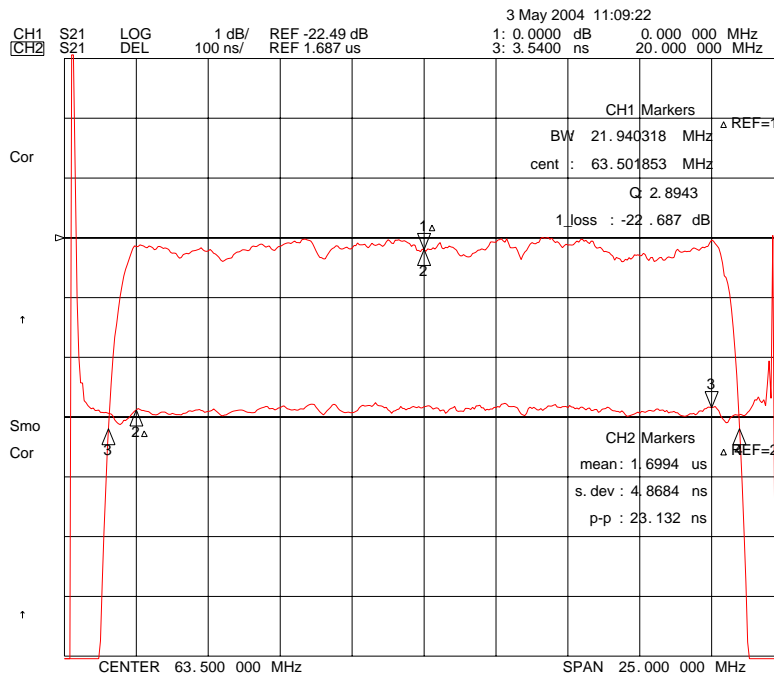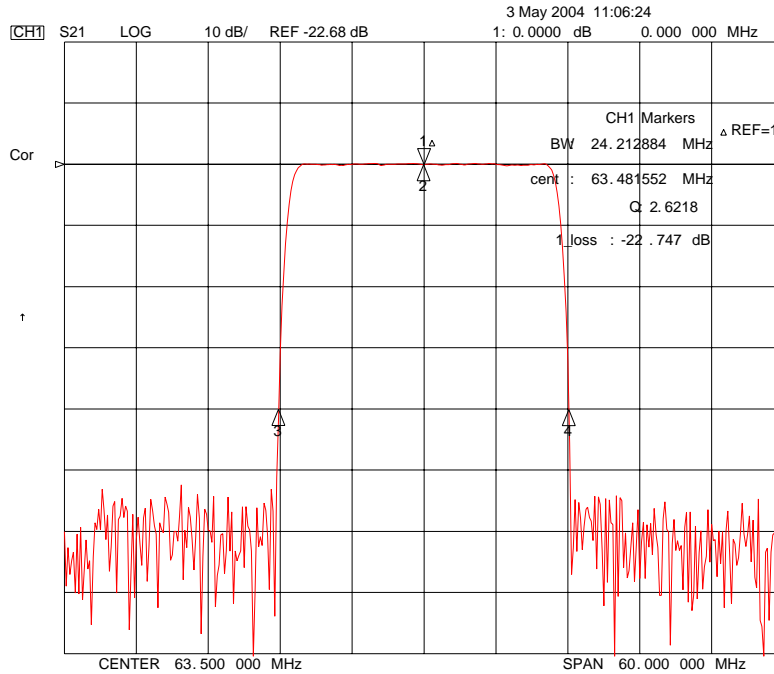

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.	222101B	
			Rev. Date	2004-05-03	
			Rev.	NM4007-CS01	4/5

SAW Bandpass Filter 222101B

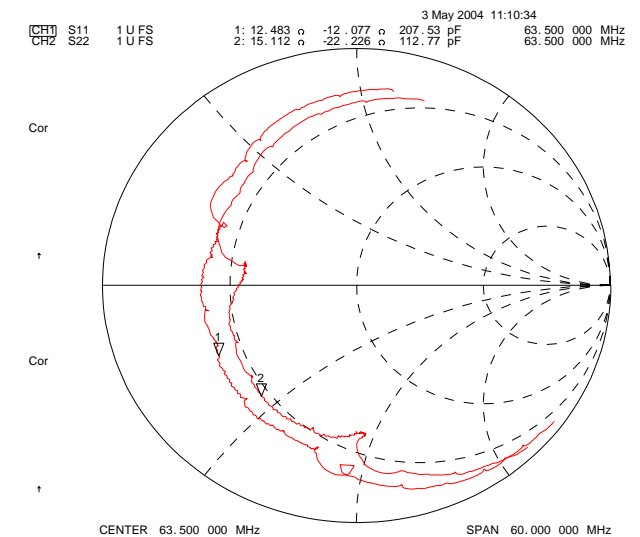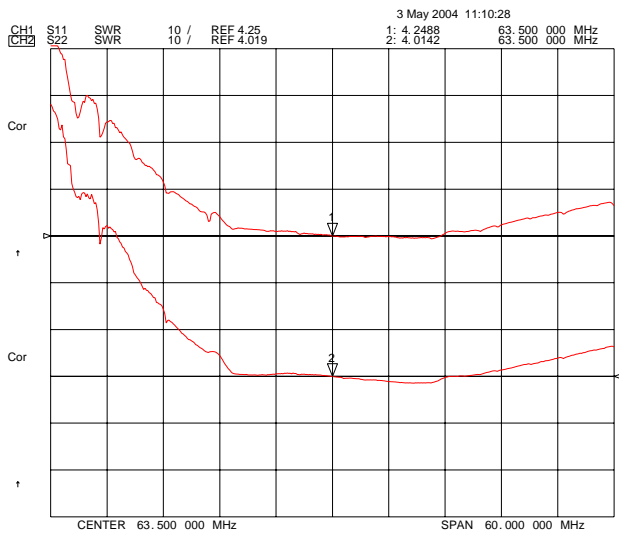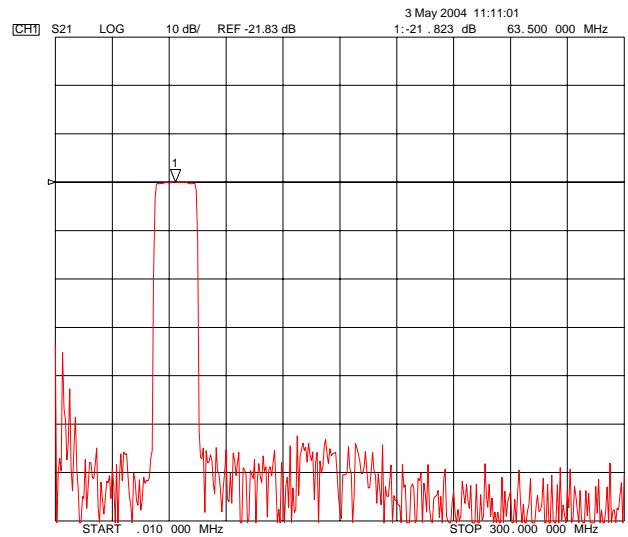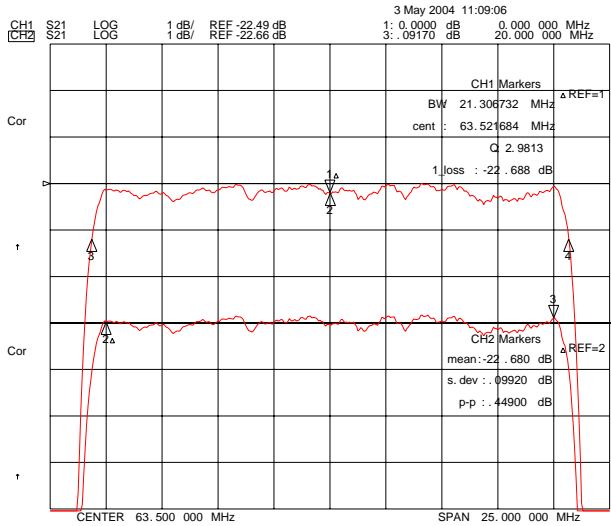

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

222101B

Rev. Date

2004-05-03

Rev.

NM4007-CS01

5/5