


SAW Bandpass Filter 251914B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

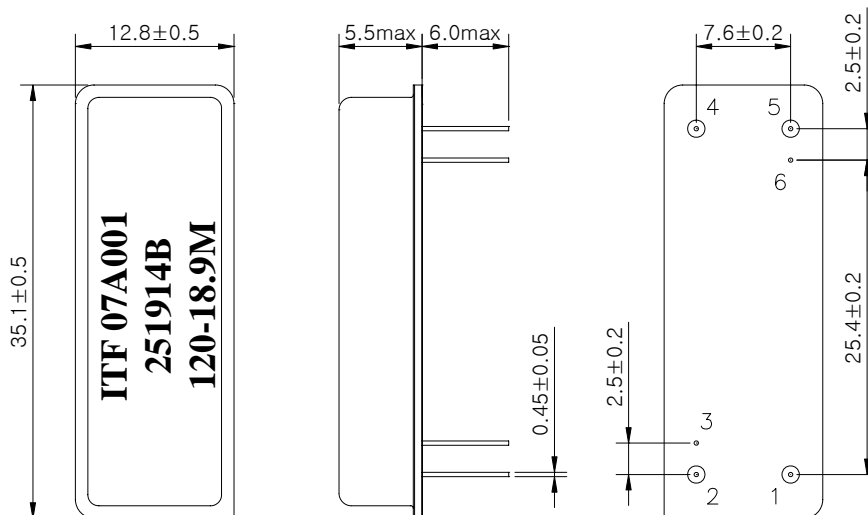

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

| Pin Configuration | |
|-------------------|-------------|
| 1 | Input |
| 5 | Output |
| 2, 4 | Ground |
| 3, 6 | Case ground |

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251914B | |
| | | Rev. Date | 2007-02-08 | |
| | | Rev. | NM7011-CS01 | 1/5 |

SAW Bandpass Filter 251914B



3. Specifications

Fo = 120.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

| | | Minimum | Typical | Maximum |
|--------------------------------------|--------|---------|---------|---------|
| Center Frequency | MHz | - | 120.0 | - |
| Insertion Loss | dB | - | 27.8 | - |
| 1dB Bandwidth | MHz | - | 18.85 | - |
| 3dB Bandwidth | MHz | 19.0 | 19.1 | - |
| 50dB Bandwidth | MHz | - | 20.2 | 20.3 |
| Amplitude Ripple (fo±9.22 MHz) | dB | - | 0.4 | 1.0 |
| Group Delay Variation (fo±9.22 MHz) | nsec | - | 30 | 100 |
| Absolute Delay | usec | - | 3.99 | - |
| Ultimate Rejection | dB | 50 | 52 | - |
| Relative Attenuation | | | | |
| Fo ± 10MHz | dB | 25 | 33 | - |
| Temperature Coefficient of Frequency | ppm/°C | - | -18 | - |

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251914B | |
| | | Rev. Date | 2007-02-08 | |
| | | Rev. | NM7011-CS01 | 2/5 |

SAW Bandpass Filter 251914B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

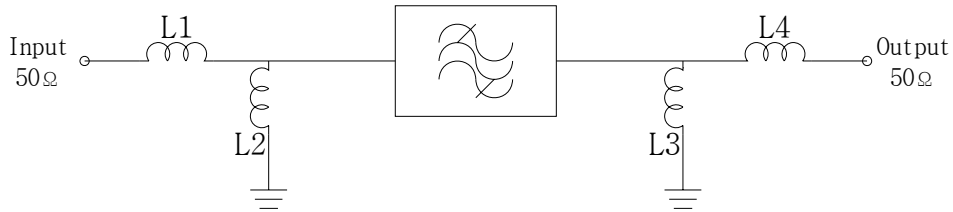

L1=68nH, L2=68nH

L3=68nH, L4=68nH


5. Marking Configuration

ITF¹⁾ 07A001²⁾

251914B³⁾

120⁴⁾ -18.9M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251914B | |
| | | Rev. Date | 2007-02-08 | |
| | | Rev. | NM7011-CS01 | 3/5 |

SAW Bandpass Filter 251914B







6. Typical Performance (at +25°C)

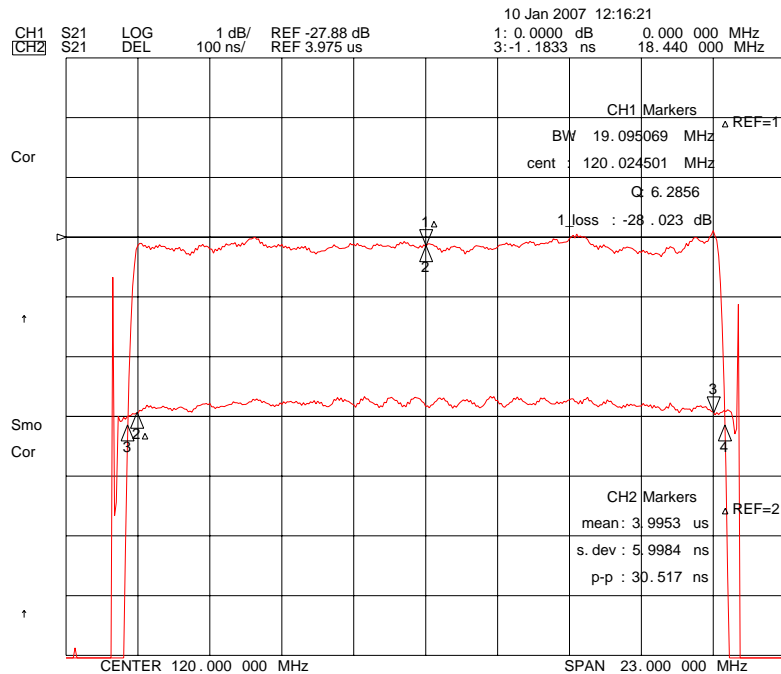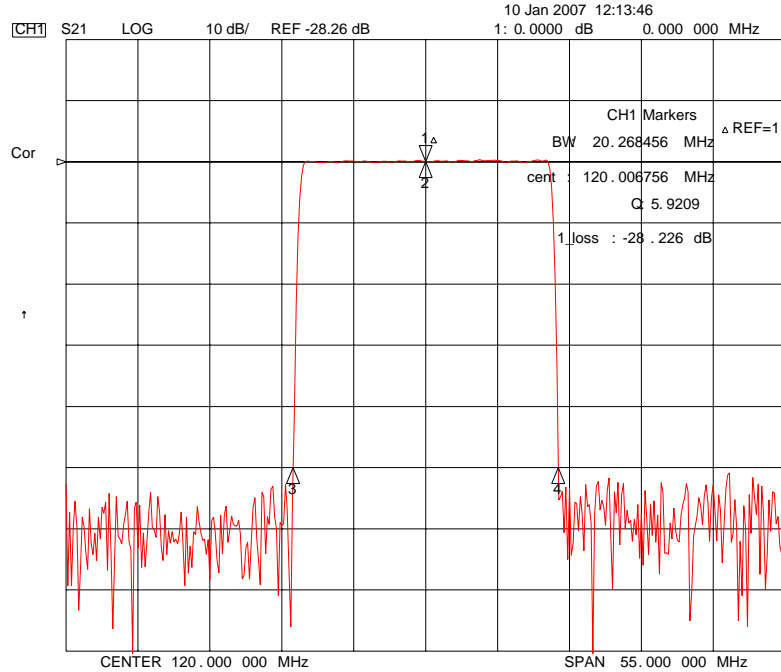

| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251914B | |
| | | Rev. Date | 2007-02-08 | |
| | | Rev. | NM7011-CS01 | 4/5 |

SAW Bandpass Filter 251914B

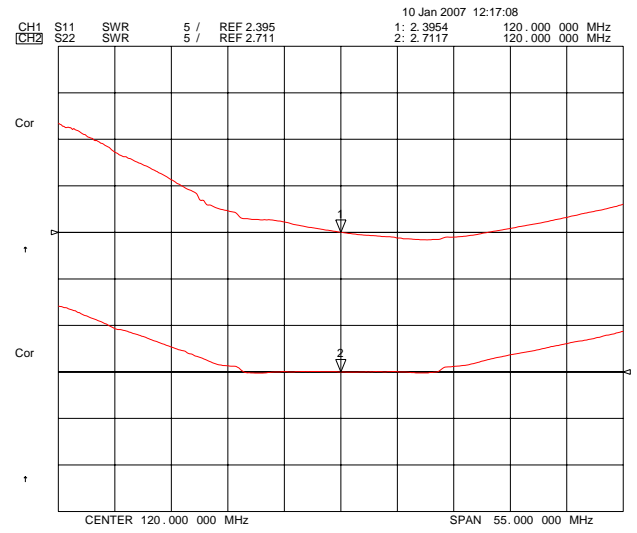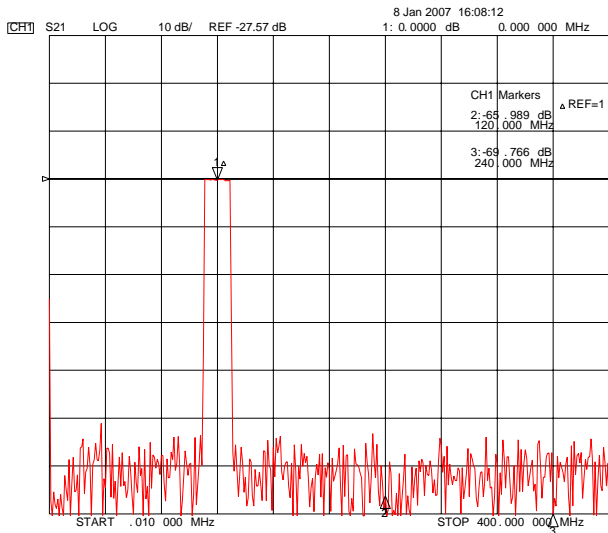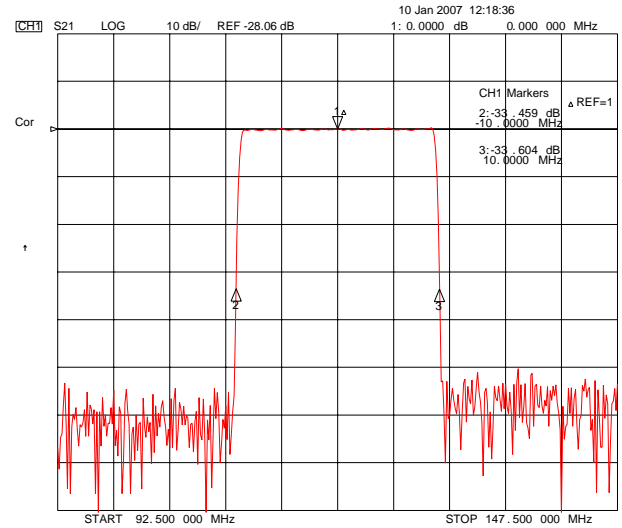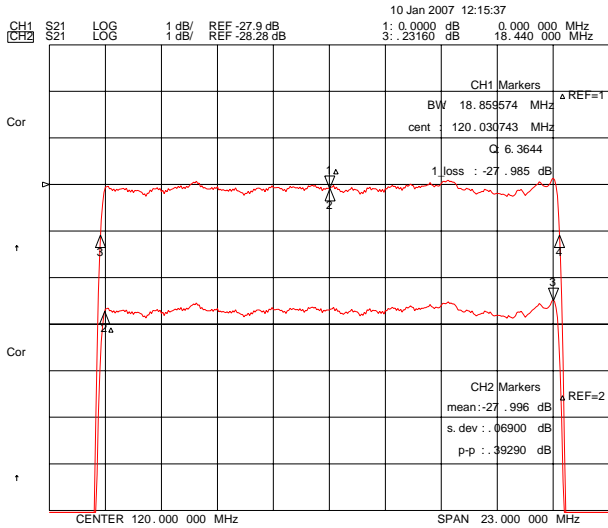

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

| | | |
|-----------|-------------|-----|
| Part No. | 251914B | |
| Rev. Date | 2007-02-08 | |
| Rev. | NM7011-CS01 | 5/5 |