


SAW Bandpass Filter 242004B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- Dip Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

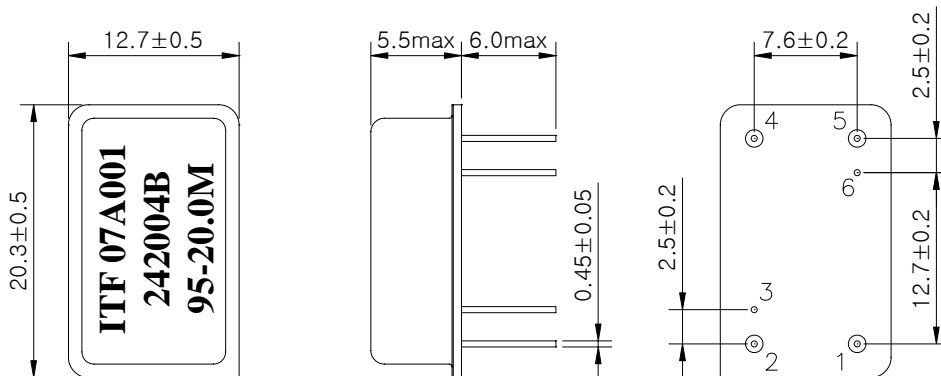

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	242004B	
		Rev. Date	2007-07-30	
		Rev.	NM7028-CS01	1/5

SAW Bandpass Filter 242004B



3. Specifications

Fo = 95.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	95.0	-
Insertion Loss	dB	-	22.2	25.0
1dB Bandwidth	MHz	-	19.9	-
3dB Bandwidth	MHz	20.0	20.2	-
50dB Bandwidth	MHz	-	21.7	22.0
Amplitude Ripple (Fo +/- 9.5 MHz)	dB	-	0.43	1.0
Group Delay Variation (Fo +/- 9.5 MHz)	nsec	-	35	80
Absolute Delay	usec	-	2.14	-
Ultimate Rejection	dB	50	58	-
Relative Attenuation				
Fo +/- 11MHz	dB	45	60	
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	242004B	
		Rev. Date	2007-07-30	
		Rev.	NM7028-CS01	2/5

SAW Bandpass Filter 242004B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

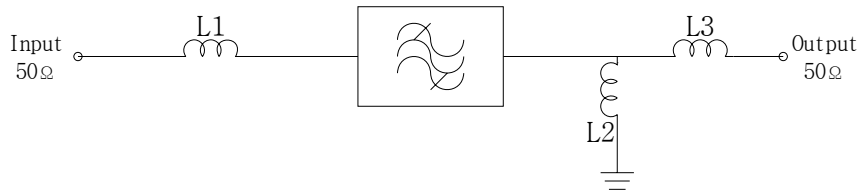

L1 = 39nH, L2 = 150nH, L3 = 39H

5. Marking Configuration

ITF¹⁾ 07A001²⁾

242004B³⁾

95⁴⁾ -20.0M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	242004B	
		Rev. Date	2007-07-30	
		Rev.	NM7028-CS01	3/5

SAW Bandpass Filter 242004B







6. Typical Performance (at +25°C)

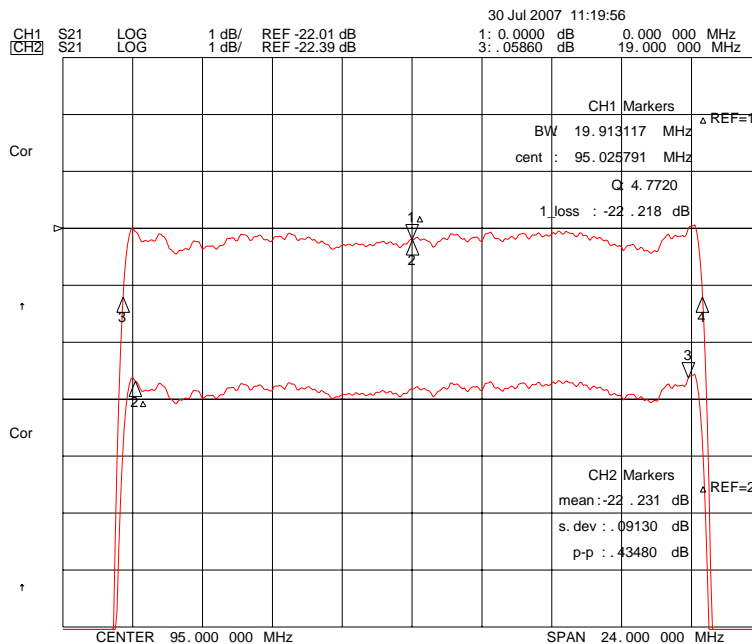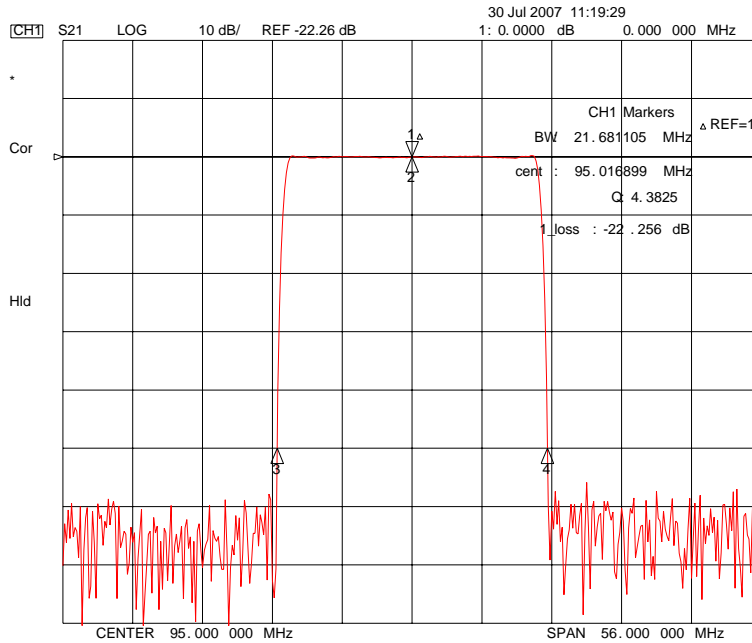

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	242004B	
Rev. Date	2007-07-30	
Rev.	NM7028-CS01	4/5

SAW Bandpass Filter 242004B

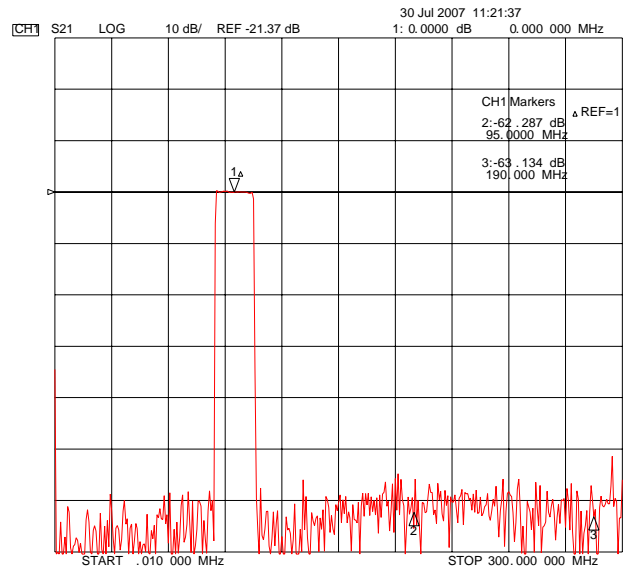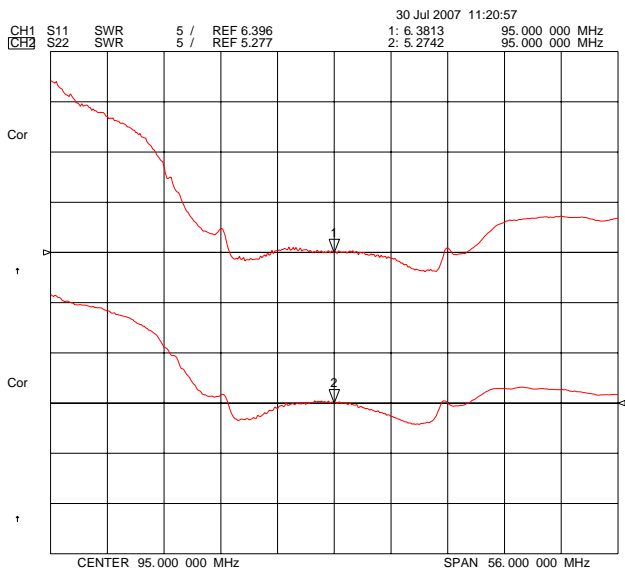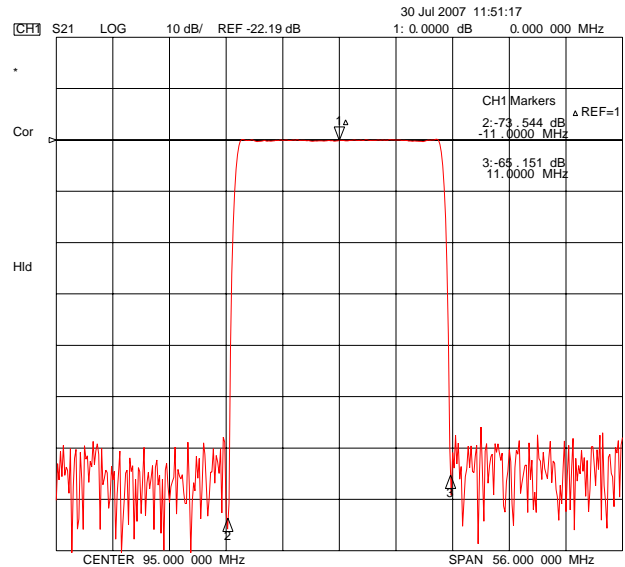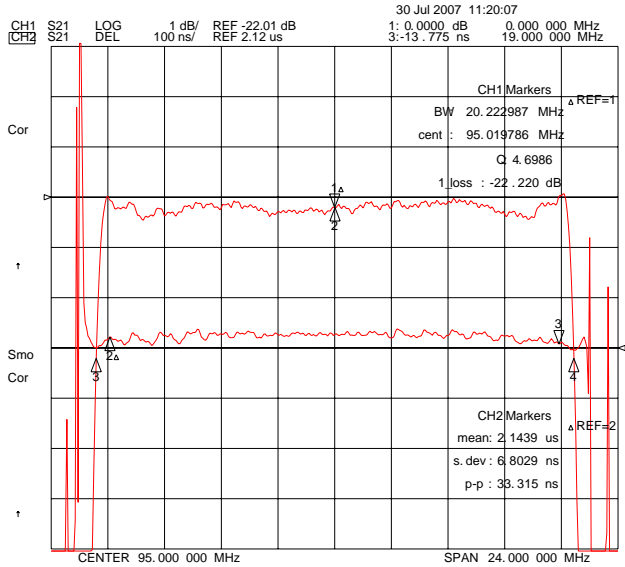

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	242004B	
Rev. Date	2007-07-30	
Rev.	NM7028-CS01	5/5