


SAW Bandpass Filter 221101B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

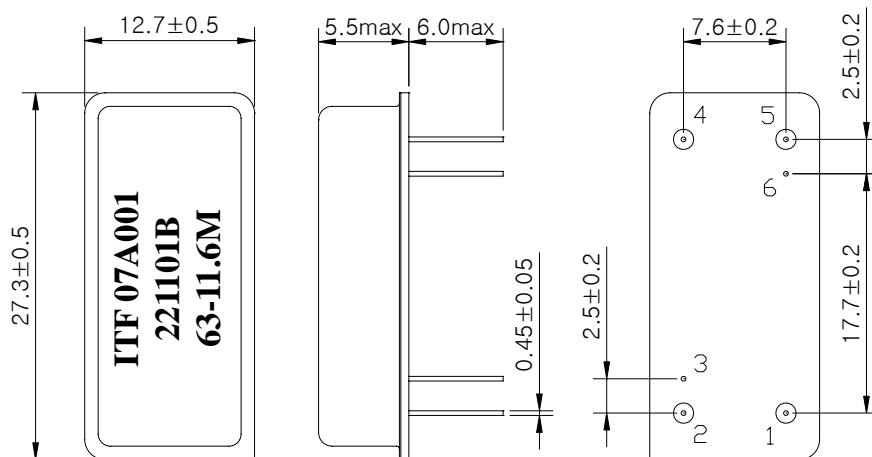

Package : D2712

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	221101B	
		Rev. Date	2007-10-16	
		Rev.	NM7052-CS01	1/5

SAW Bandpass Filter 221101B



3. Specifications

Fo = 63.0 MHz

Terminating source impedance : 50Ω and matching network


Terminating load impedance : 50Ω and matching network

Operating Temperature : -20 °C ~ +60 °C		Minimum	Typical	Maximum
Center Frequency	MHz	-	63.0	-
Insertion Loss	dB	-	23.9	25.0
1dB Bandwidth	MHz	11.4	11.67	-
3dB Bandwidth	MHz	-	11.85	-
40dB Bandwidth	MHz	-	12.64	12.8
Amplitude Ripple (fo± 5.5 MHz)	dB	-	0.59	1.0
Group Delay Variation (fo± 5.5 MHz)	nsec	-	50	80
Absolute Delay	usec	-	3.29	-
Ultimate Rejection	dB	48	52	-
Relative Attenuation				
57.3-0.5 MHz	dB	15	20	
68.7+0.5 MHz	dB	15	20	
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Room Temperature : +25 °C		Minimum	Typical	Maximum
Insertion Loss	dB	-	23.9	25.0
Amplitude Ripple (fo ± 5.7 MHz)	dB	-	0.59	1.0
Group Delay Variation (fo ± 5.7 MHz)	nsec	-	50	80

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	221101B	
		Rev. Date	2007-10-16	
		Rev.	NM7052-CS01	2/5

SAW Bandpass Filter 221101B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

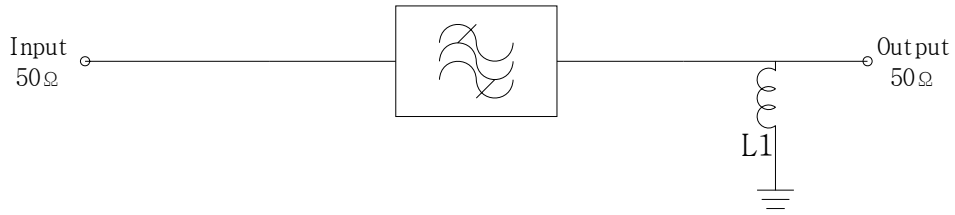

L1 = 150nH

5. Marking Configuration

ITF¹⁾07A001²⁾

221101B³⁾

63⁴⁾-11.6M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	221101B	
		Rev. Date	2007-10-16	
		Rev.	NM7052-CS01	3/5

SAW Bandpass Filter 221101B







6. Typical Performance (at +25°C)

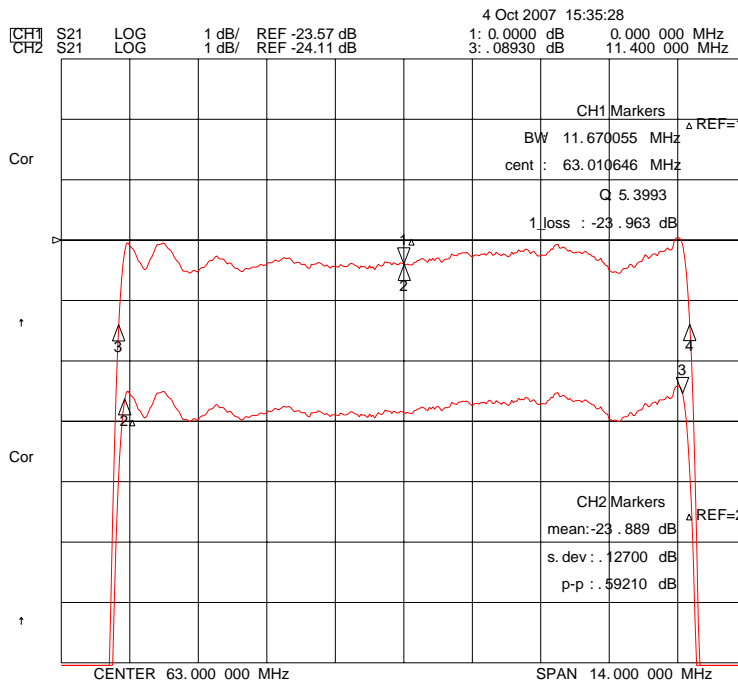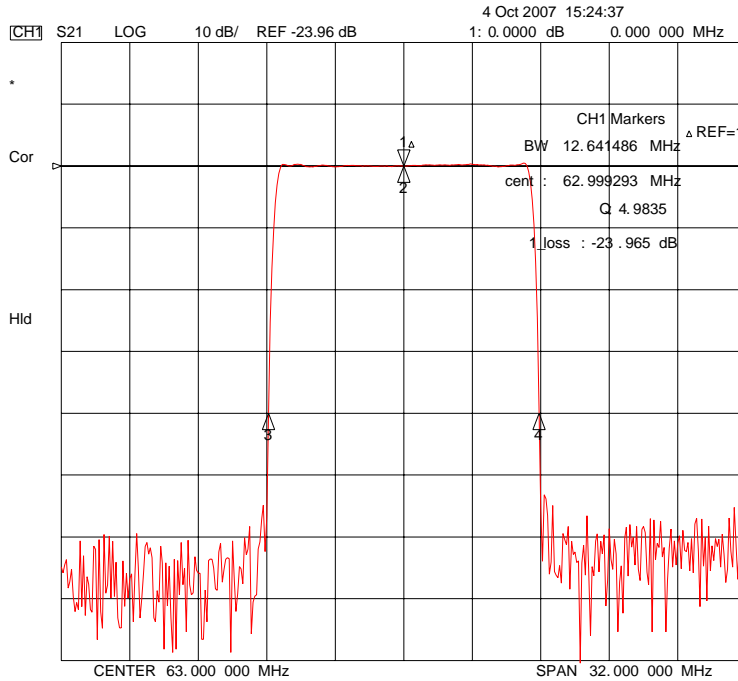

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	221101B	
Rev. Date	2007-10-16	
Rev.	NM7052-CS01	4/5

SAW Bandpass Filter 221101B

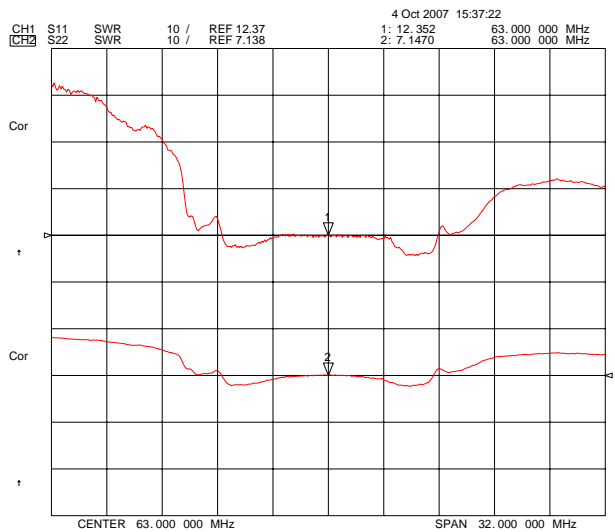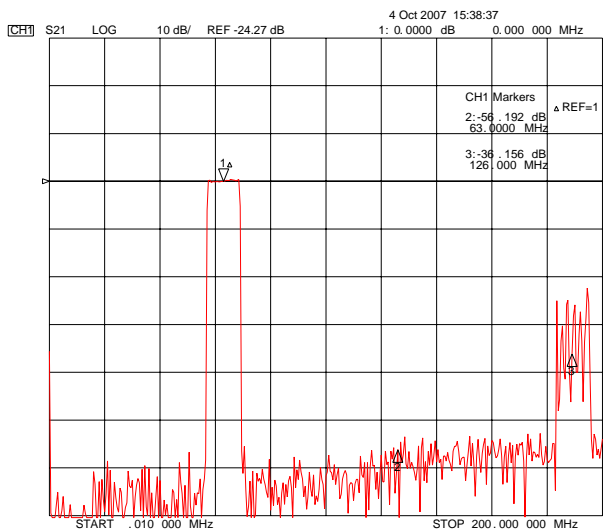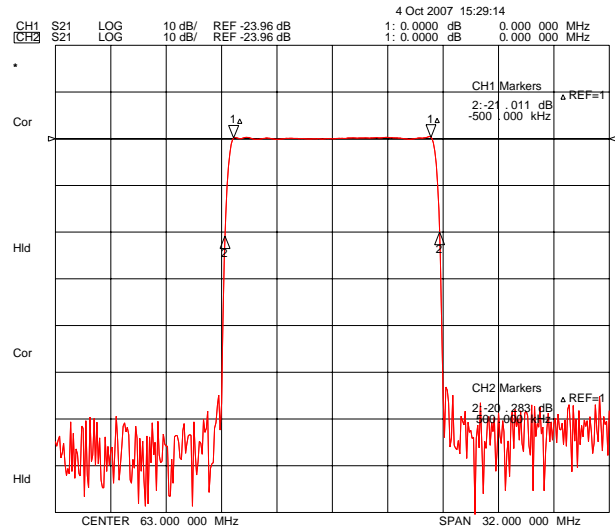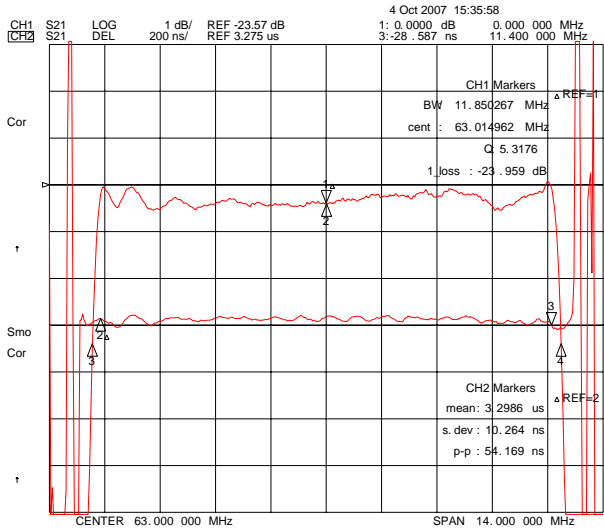

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	221101B	
Rev. Date	2007-10-16	
Rev.	NM7052-CS01	5/5