


# SAW Bandpass Filter 220002B



## 1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- Dip Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

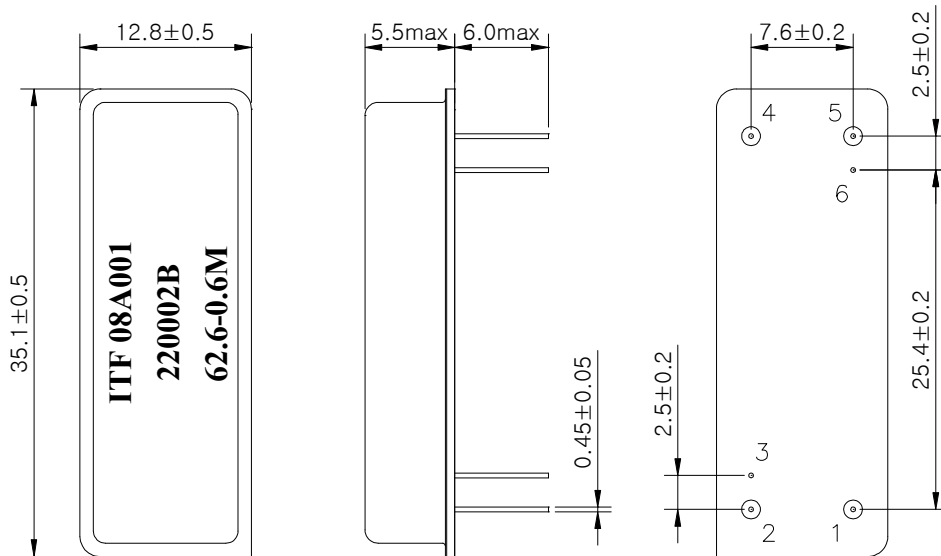

**Package : D3512**

Dimensions shown are nominal in millimeters  
 Base : Fe(SPCC), Au plating over Ni plated  
 Cap : Cu & Cr Alloy, Ni Plated  
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220002B	
		Rev. Date	2008-11-11	
		Rev.	NW8028-CS01	1/5

# SAW Bandpass Filter 220002B



## 3. Specifications

Fo = 62.6 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	62.6	-
Insertion Loss	dB	-	21.7	24.0
1dB Bandwidth	MHz	0.5	0.62	-
3dB Bandwidth	MHz	-	0.8	-
20dB Bandwidth	MHz	-	1.27	1.37
40dB Bandwidth	MHz	-	1.49	1.6
Amplitude Ripple (Fo +/- 0.225 MHz)	dB	-	0.35	0.9
Group Delay Variation (Fo +/- 0.225 MHz)	nsec	-	200	350
Absolute Delay	usec	-	4.05	-
Ultimate Rejection	dB	50	57	-
Temperature Coefficient of Frequency	ppm/°C <sup>2</sup>	-	-0.03	-

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220002B	
		Rev. Date	2008-11-11	
		Rev.	NW8028-CS01	2/5

# SAW Bandpass Filter 220002B



## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

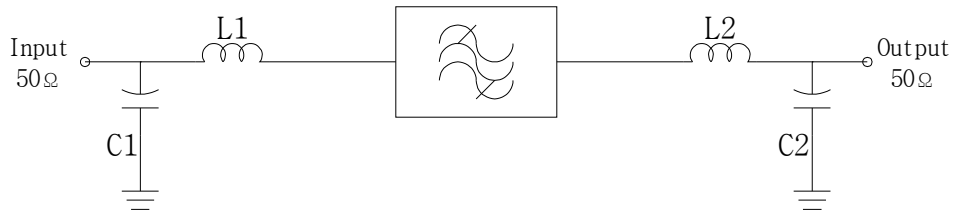

$$L1 = L2 = 180\text{nH}$$

$$C1 = C2 = 56\text{ pF}$$


## 5. Marking Configuration

ITF<sup>1)</sup>08A001<sup>2)</sup>

220002B<sup>3)</sup>

62.6<sup>4)</sup>-0.6M<sup>5)</sup>



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220002B	
		Rev. Date	2008-11-11	
		Rev.	NW8028-CS01	3/5

# SAW Bandpass Filter 220002B







## 6. Typical Performance ( at +25°C )

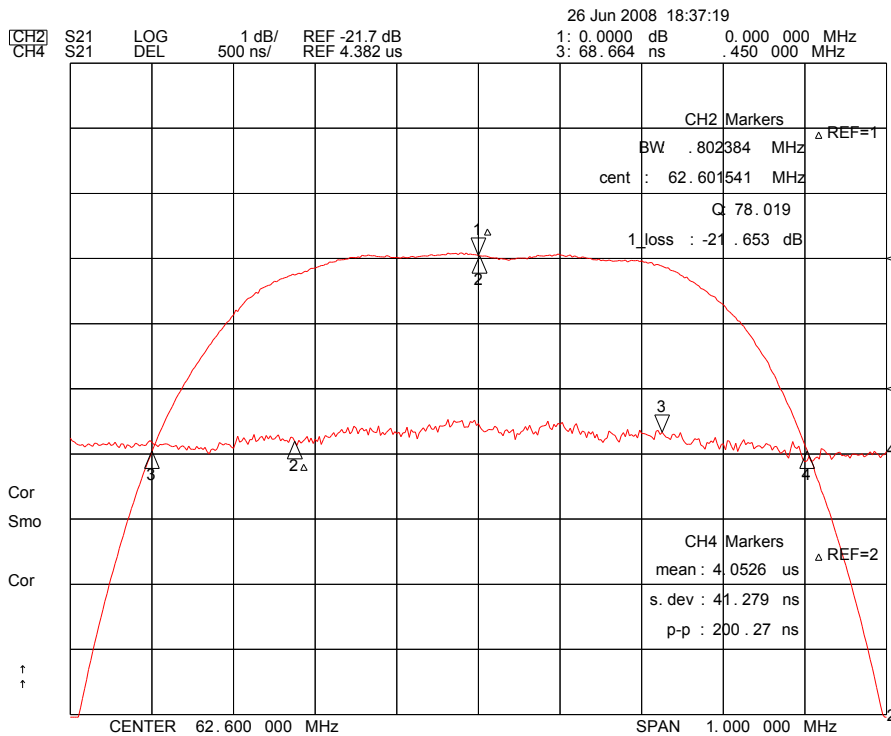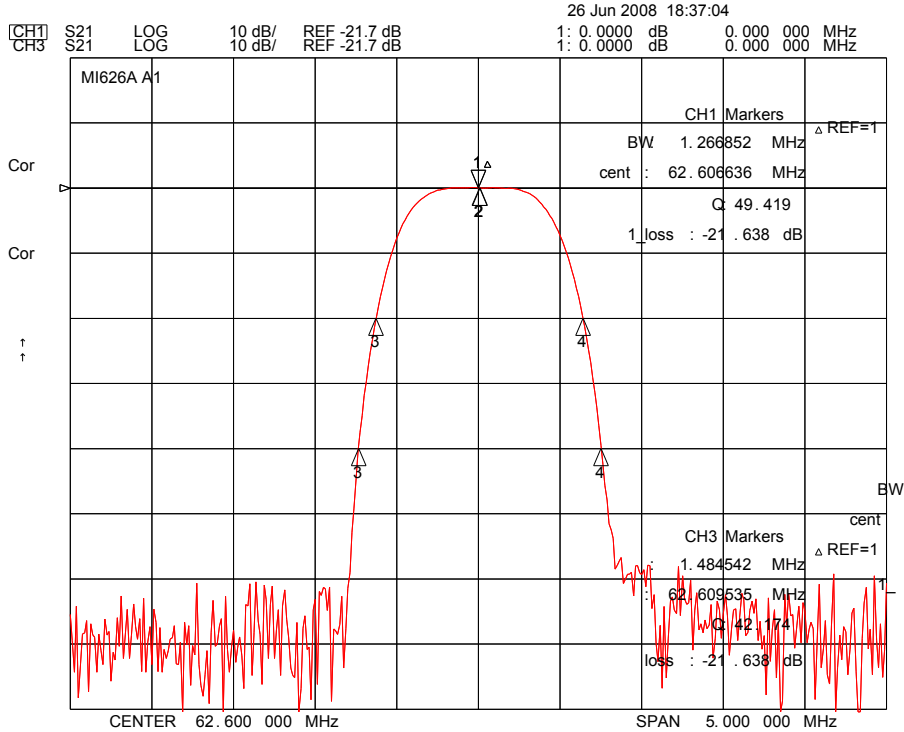

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	220002B	
Rev. Date	2008-11-11	
Rev.	NW8028-CS01	4/5

# SAW Bandpass Filter 220002B

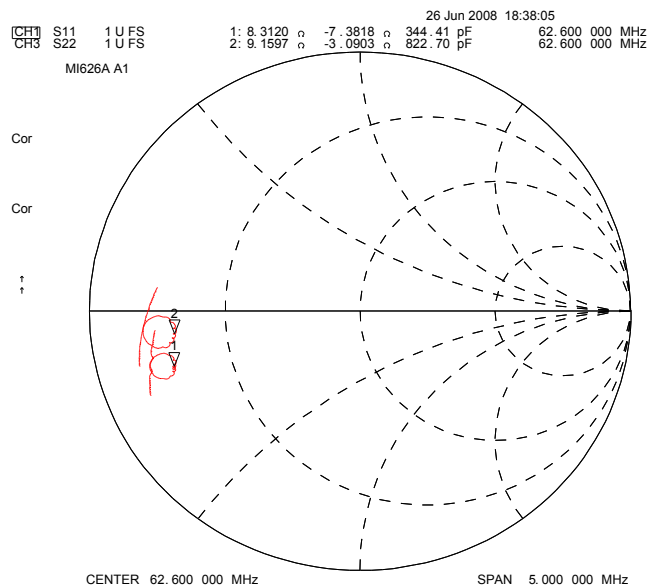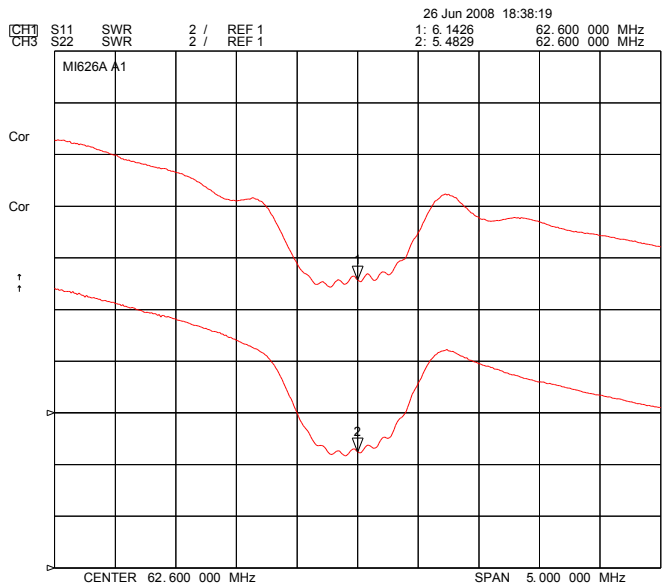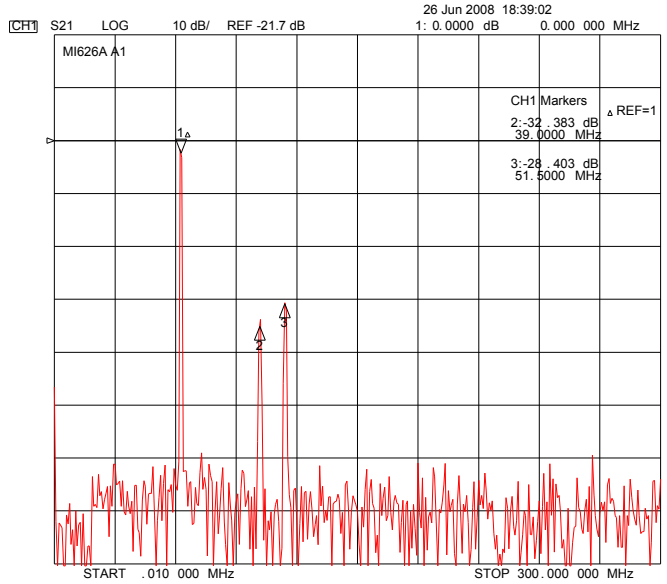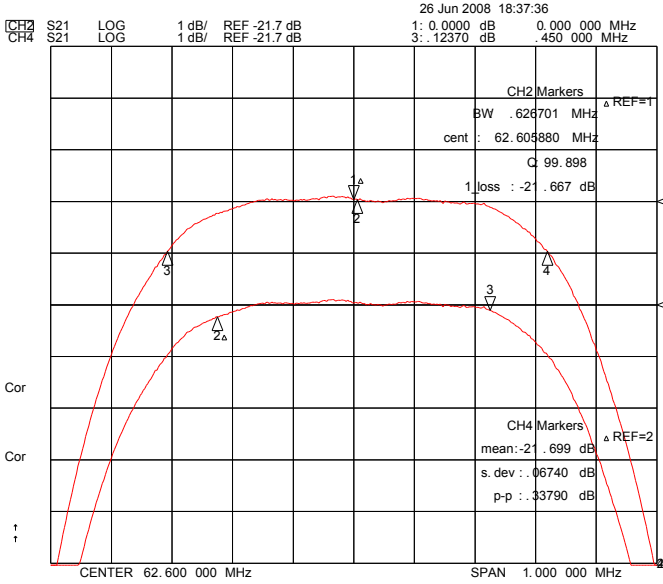

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	220002B	
Rev. Date	2008-11-11	
Rev.	NW8028-CS01	5/5