


SAW Bandpass Filter F2482



Features

- RF bandpass filter
- Passband 15.0MHz
- Ceramic Surface Mounted Device (SMD) Package (5.0mm * 5.0mm)
- RoHS/RoHS2 Compliant

Package Dimensions

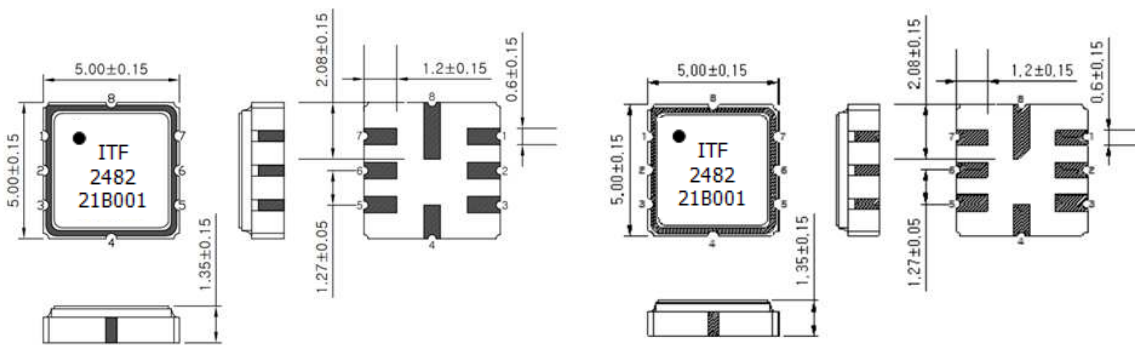

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration	
2	Input
6	Output
1, 3, 4, 5, 7, 8	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-55	25	85
Storage Temperature Range	°C	-55	-	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (**ESD**)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	1/7

SAW Bandpass Filter F2482




Specifications

		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	248.0	-
Insertion Loss (Fc ± 7.5 MHz)	dB	-	2.8	4.0
Amplitude Ripple (Fc ± 7.5 MHz)	dB	-	1.0	2.0
Absolute Attenuation				
0~228.0 MHz	dB	25	30	-
278.0~1000.0 MHz	dB	25	30	-
Input/Output Impedance	Ohms	-	50	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	2/7

SAW Bandpass Filter F2482



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

- ¹⁾
ITF ²⁾
2482 ³⁾
21B001⁴⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Part Number

4) Lot Number



* Ink or Laser Marking available

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	3/7

SAW Bandpass Filter F2482



Typical Performance (at 25°C)

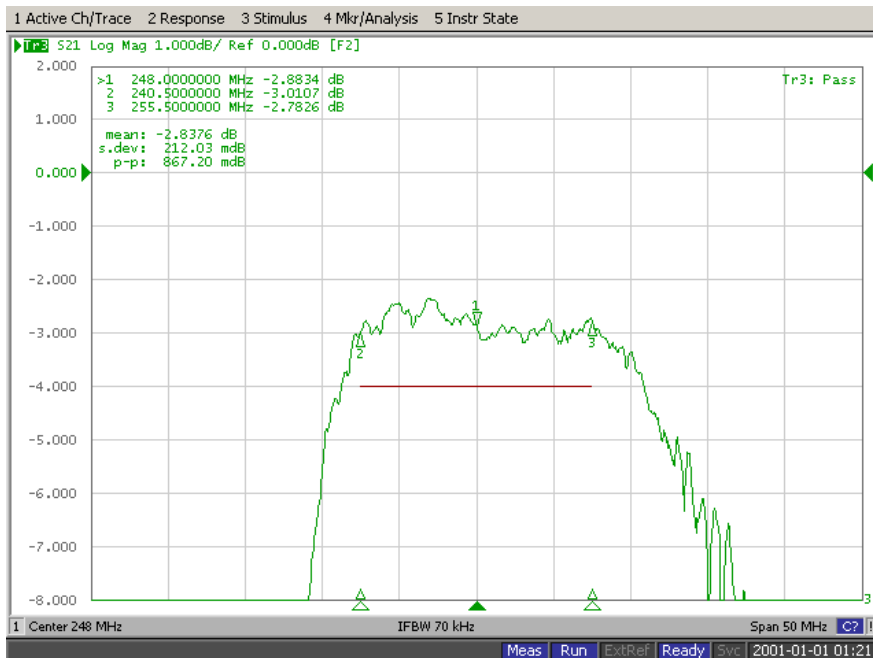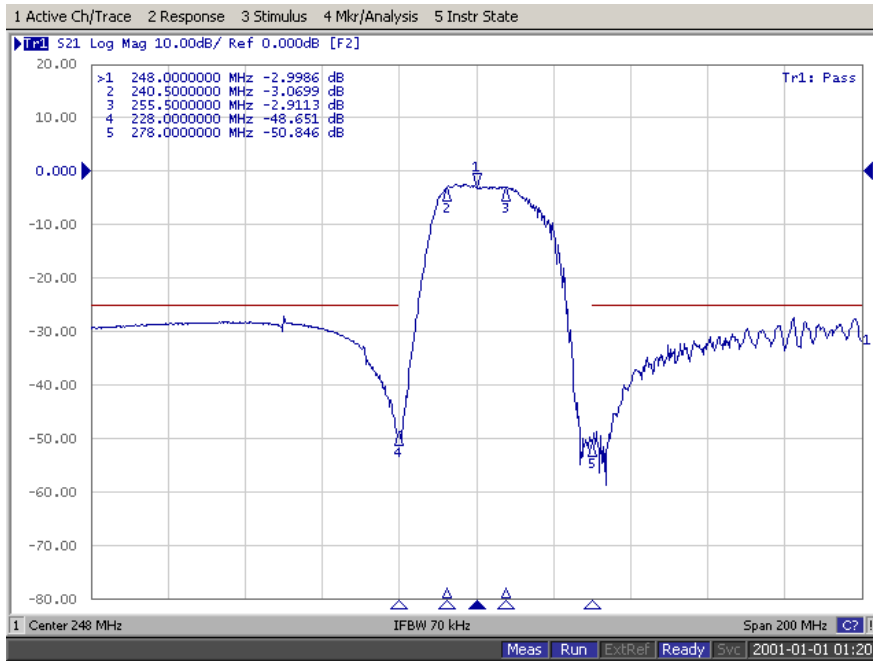


ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	F2482	
Rev. Date	2021-12-15	
Rev.	AS02	4/7


SAW Bandpass Filter F2482




Input / Output VSWR Charts

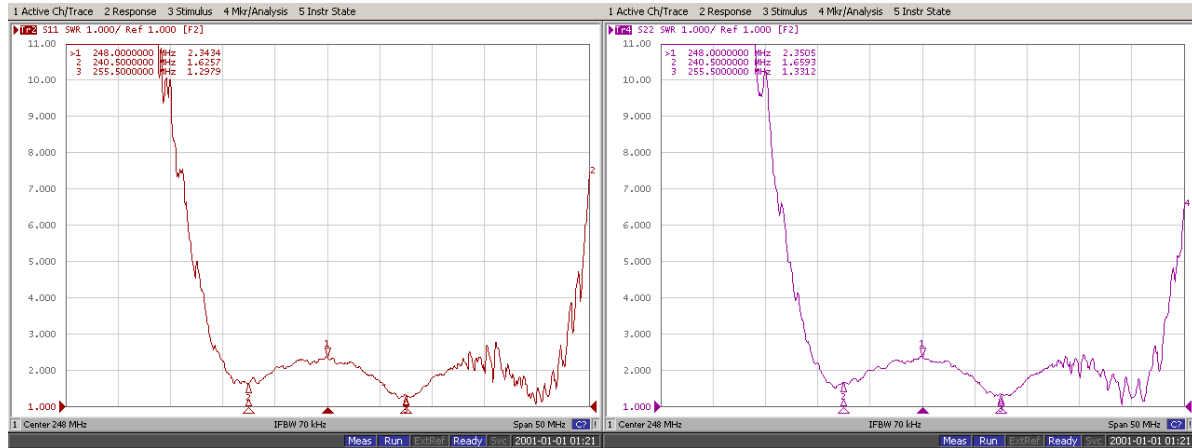

Input / Output Smith Charts

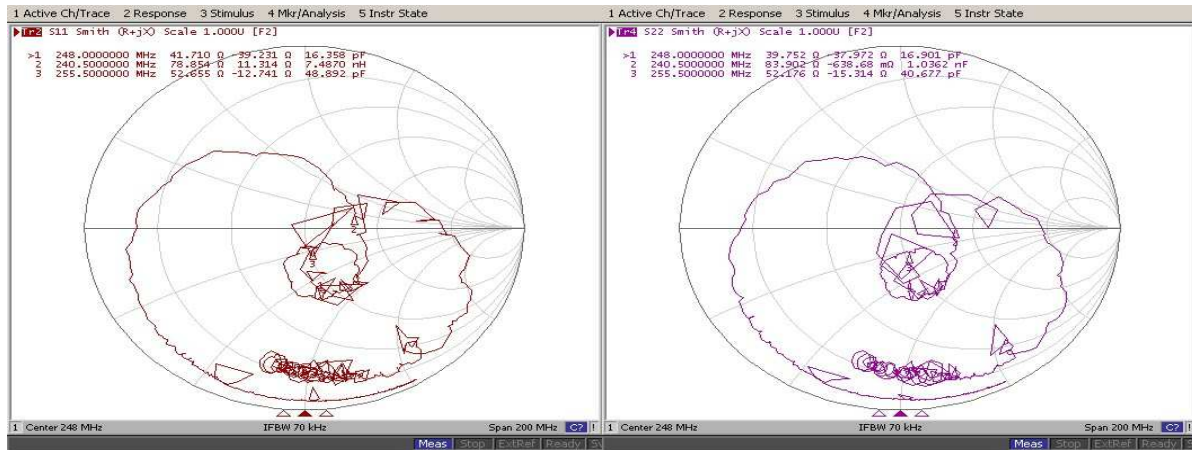


Packing Specification

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	5/7

SAW Bandpass Filter F2482




1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

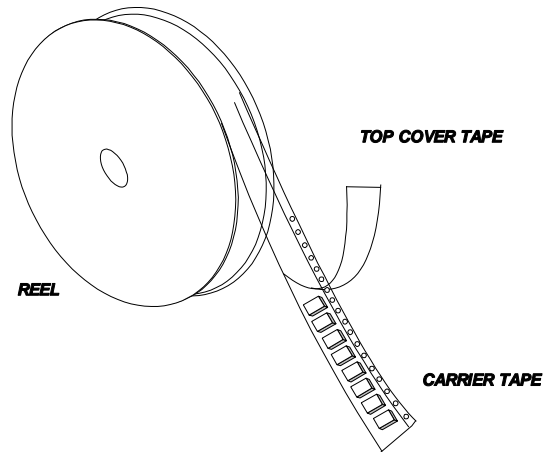

Tape Specification

1. Leader part and vacant position specification

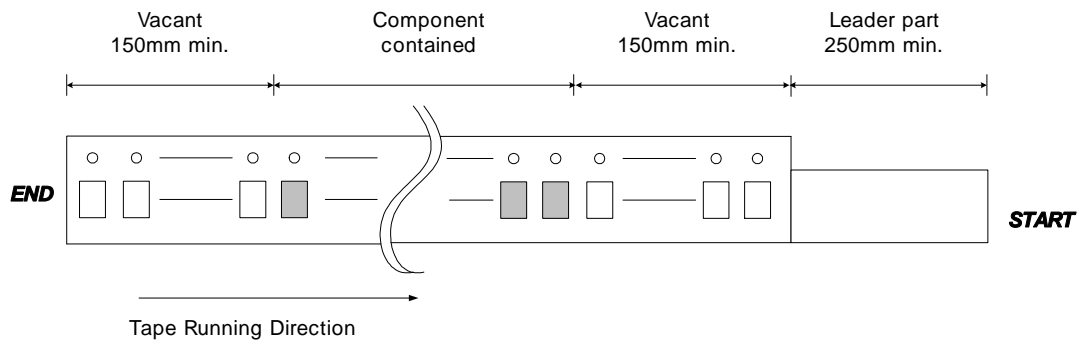


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

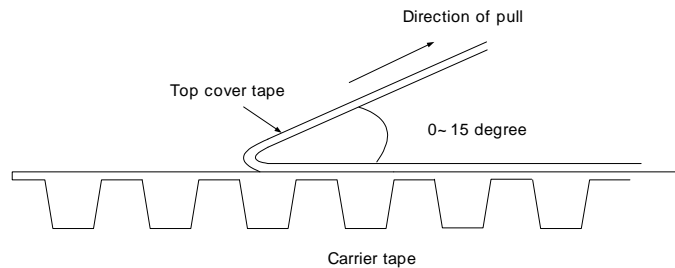


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	6/7

SAW Bandpass Filter F2482




Carrier Tape Dimensions [unit : mm]

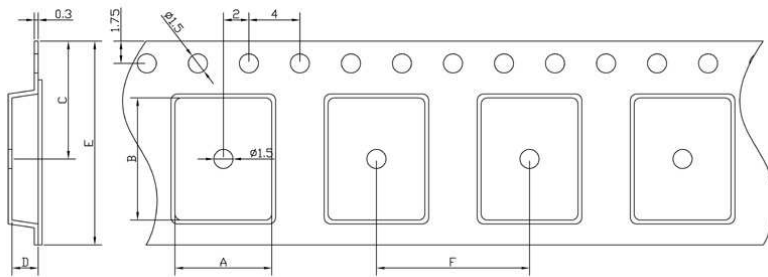


A	5.50 ± 0.1
B	5.50 ± 0.1
C	7.25 ± 0.1
D	1.95 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1


Part Direction

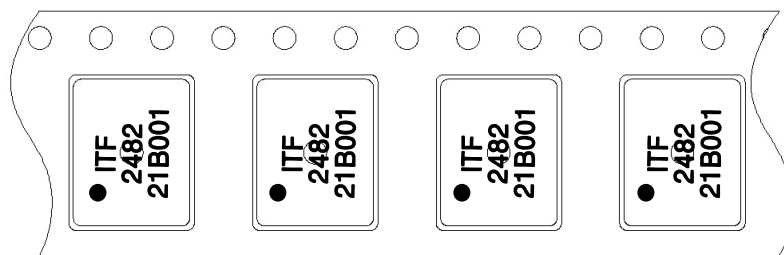

→
Tape Running Direction

Reel Dimensions [unit : mm]

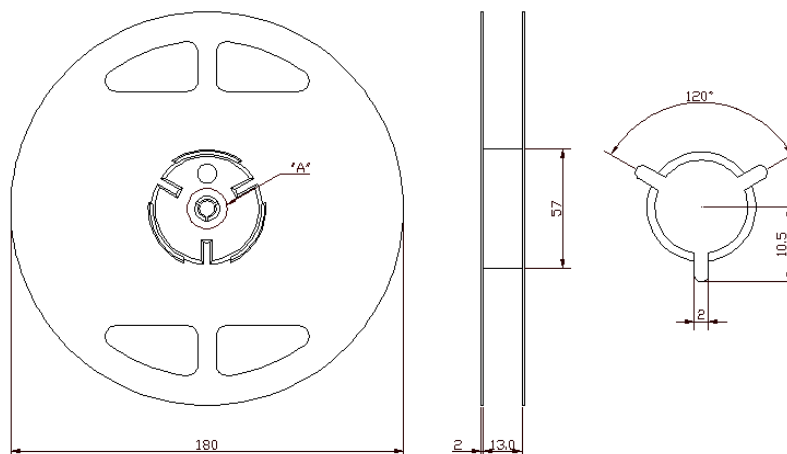

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2482	
		Rev. Date	2021-12-15	
		Rev.	AS02	7/7