


# SAW Bandpass Filter F2G10



## Features

- RF bandpass filter
- High attenuation
- No matching single-ended operation
- Ceramic Surface Mounted Device Package ( 3.0 mm × 3.0 mm )
- RoHS Compliant

## Package Dimension – SMD 3.0 × 3.0

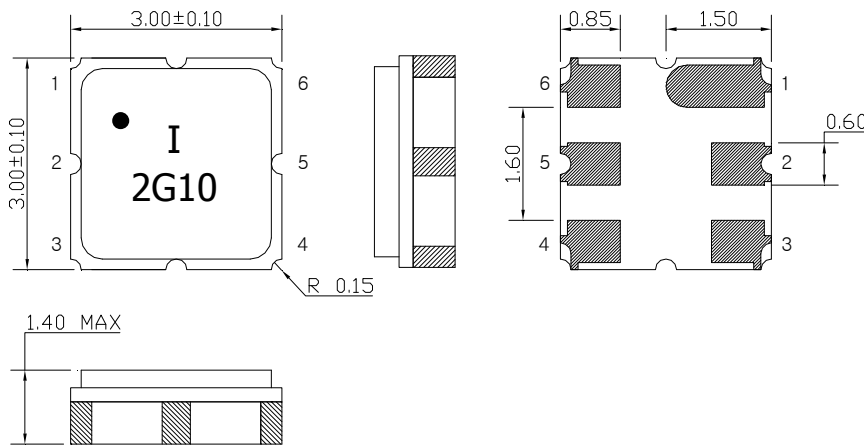

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um  
Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Case ground

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-30	25	85
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	1/7

# SAW Bandpass Filter F2G10



## Specifications

Fc = 2120 MHz


Terminating source impedance : 50Ω

Terminating load impedance : 50Ω

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fc )	-	2120	-	MHz
Insertion Loss (In Fc +/- 10 MHz)	-	2.4	4.0	dB
Amplitude Ripple (In Fc +/- 10 MHz)	-	0.7	2.0	dBp-p
VSWR (In Fc +/- 10 MHz)	-	1.7	2.5	
Relative Attenuation				
DC ~ 500 MHz	20	32	-	dB
500 ~ 1900 MHz	18	28	-	
190 ~ 2040 MHz	22	33	-	
2220 ~ 2300 MHz	24	36	-	
2300 ~ 4000 MHz	22	34	-	
Input/Output Impedance	-	50	-	Ohms

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	2/7

# SAW Bandpass Filter F2G10



## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )




## Marking Configuration

●<sup>1)</sup>  
I<sup>2)</sup>  
2G10<sup>3)</sup>

- 1) Pad Number 1 Index
- 2) Manufacturer name
- 3) Marking Number



\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	3/7

# SAW Bandpass Filter F2G10



## Typical Performance ( at 25 °C )

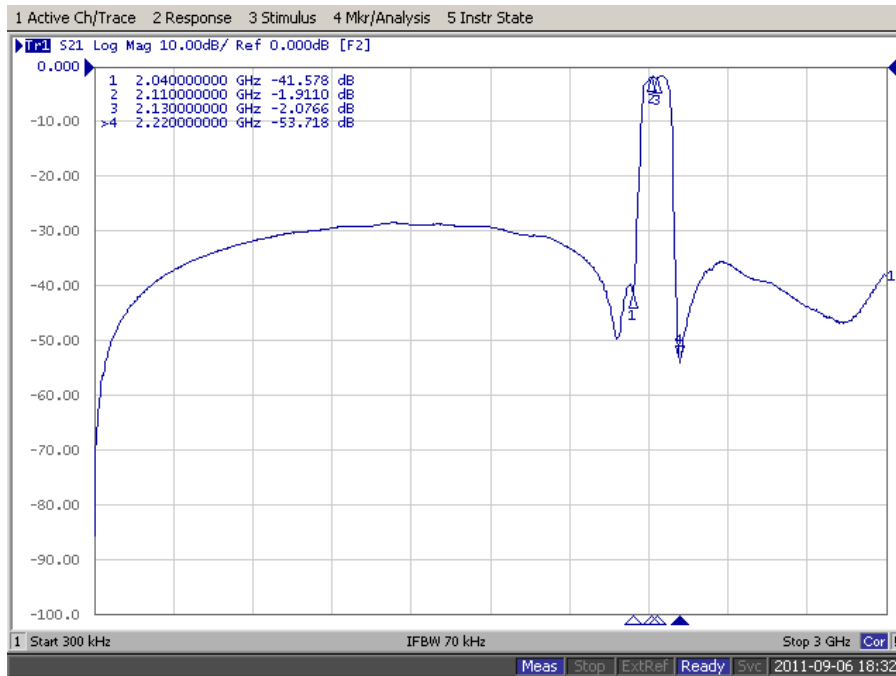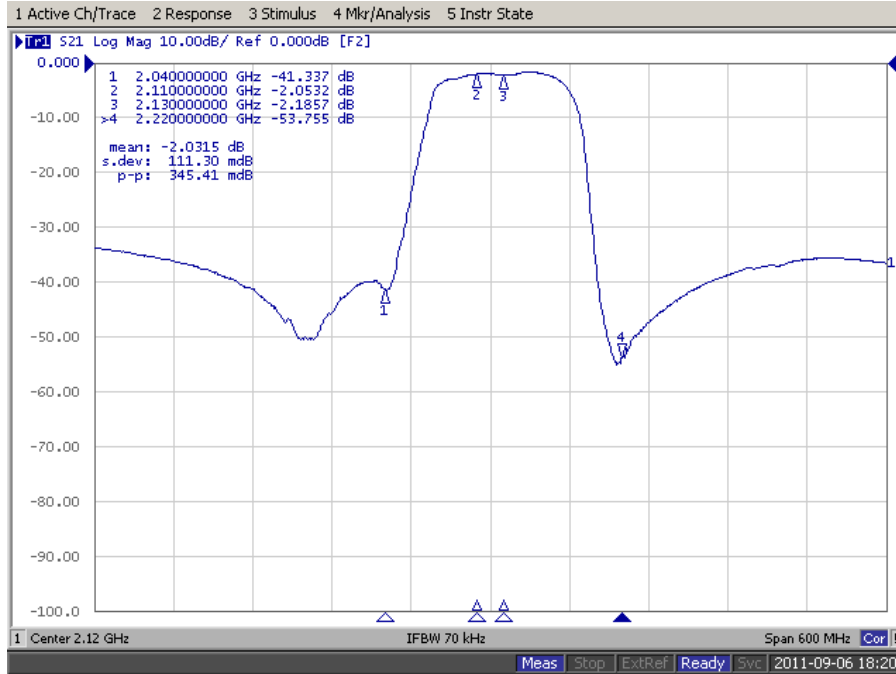



**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	F2G10	
Rev. Date	2012-06-05	
Rev.	NCMI02-AS 02	4/7



# SAW Bandpass Filter F2G10



## Input / Output VSWR Charts

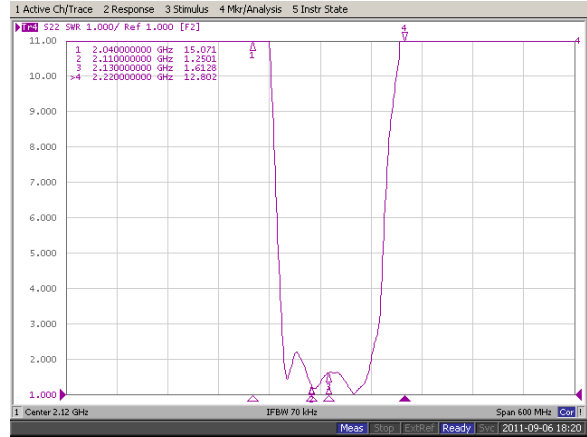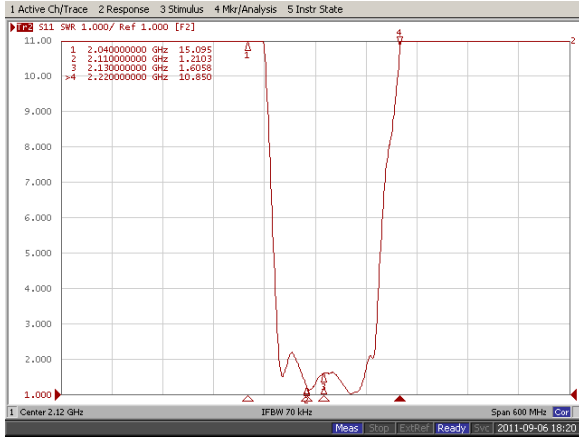

## Input / Output Smith Charts

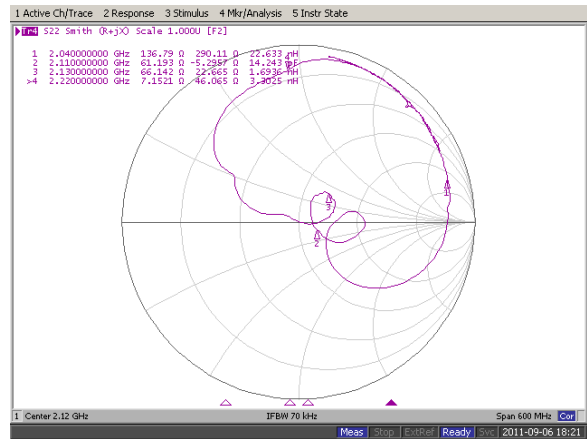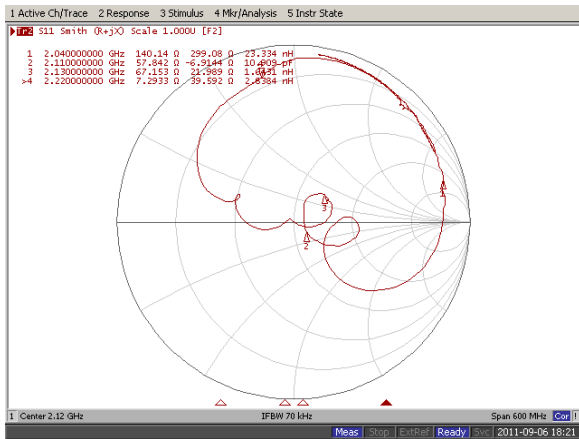


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	5/7

# SAW Bandpass Filter F2G10




## Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

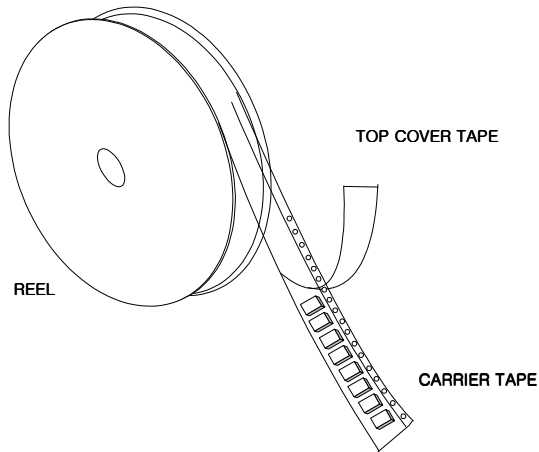

## Tape Specification

1. Leader part and vacant position specification

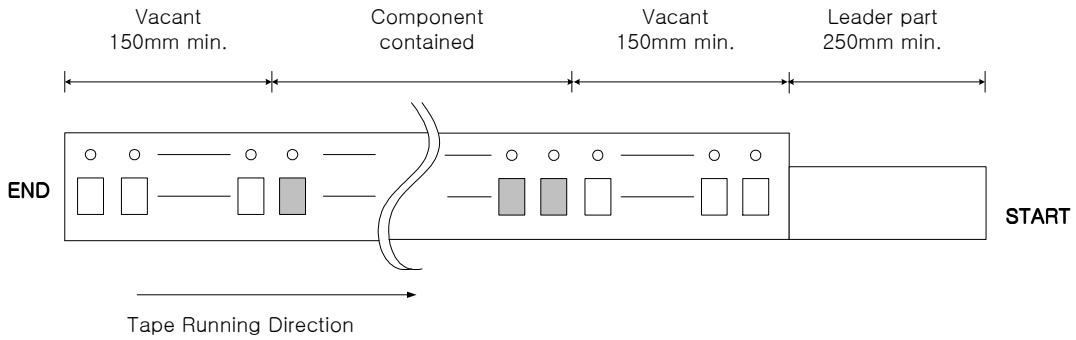


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

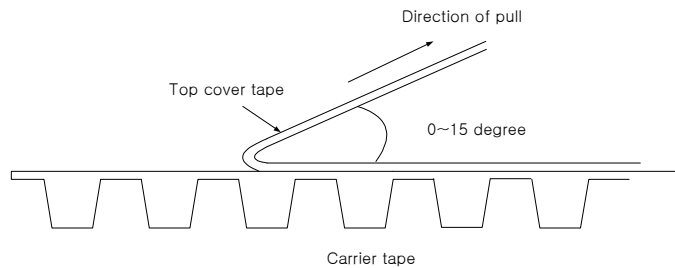


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	6/7

# SAW Bandpass Filter F2G10




## Carrier Tape Dimensions [unit : mm]

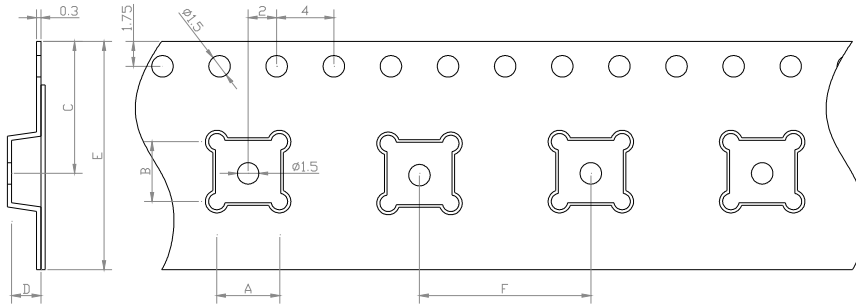


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

## Part Direction

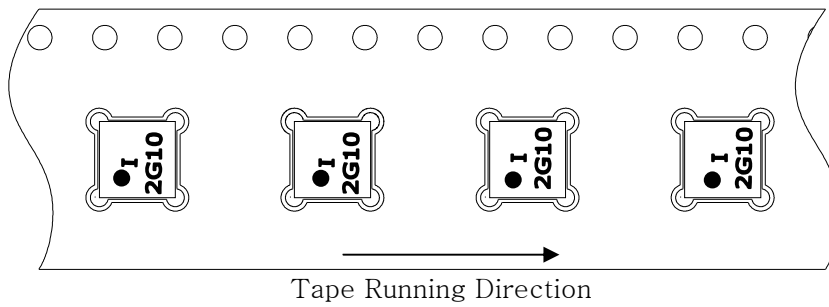

## Reel Dimensions [unit : mm]

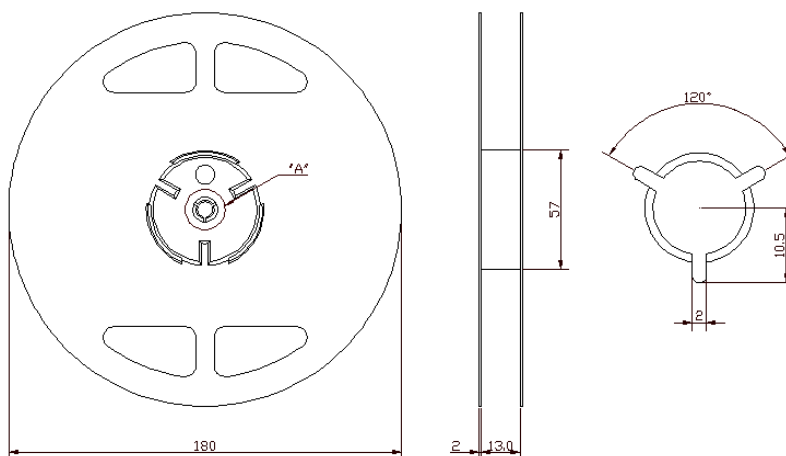

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G10	
		Rev. Date	2012-06-05	
		Rev.	NCMI02-AS 02	7/7