


SAW Bandpass Filter F9282



Features

- RF bandpass filter
- High attenuation
- Usable bandwidth 7MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package

Package Dimensions

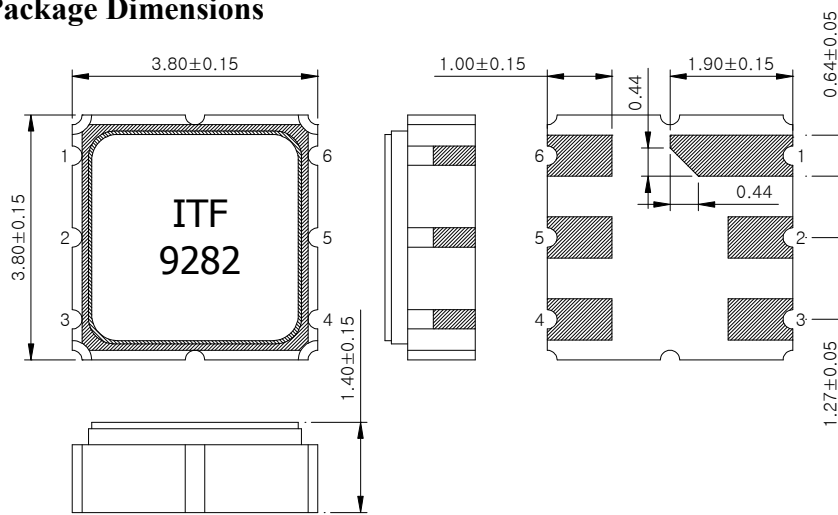

Dimensions shown are nominal in millimeters

Body : Al_2O_3 Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating $0.3 \sim 1.0$ μm , Over a $1.27 \sim 8.89$ μm
Ni Plating


Pin Configuration

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	$^{\circ}\text{C}$	-	25	-
Storage Temperature Range	$^{\circ}\text{C}$	-40	-	85
Power Handling Capability	dBm	-	-	-

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9282	
		Rev. Date	2010-11-05	
		Rev.	NRLK01-AS01	1/7

SAW Bandpass Filter F9282



Specifications

$F_c = 928.5 \text{ MHz}$

Terminating source impedance : 50Ω

Terminating load impedance : 50Ω

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	925	-	932
Insertion Loss ($F_c \pm 3.5 \text{ MHz}$)	dB	-	2.8	3.5
Amplitude Ripple ($F_c \pm 3.5 \text{ MHz}$)	dB	-	0.5	1.2
Absolute Group Delay at F_c	nsec	-	60	-
Group Delay Variation ($F_c \pm 3.5 \text{ MHz}$)	nsec	-	50	-
VSWR ($F_c \pm 3.5 \text{ MHz}$)		-	1.5	2.0
Relative Attenuation (Reference Level from 0dB)				
803.5MHz ~ 903.5 MHz	dB	35	40	-
903.5MHz ~ 910.0 MHz		8	15	-
950.0MHz ~ 988.5 MHz		10	15	-
988.5MHz ~ 1053.5 MHz		40	50	-
Temperature Coefficient of Frequency	ppm/ $^{\circ}\text{C}$	-	-42	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9282	
		Rev. Date	2010-11-05	
		Rev.	NRLK01-AS01	2/7

SAW Bandpass Filter F9282



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

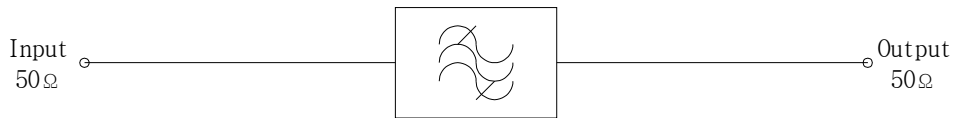


Marking Configuration

ITF¹⁾

9282²⁾

1) Manufacturer name



2) Marking Number


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9282	
		Rev. Date	2010-11-05	
		Rev.	NRLK01-AS01	3/7

SAW Bandpass Filter F9282



Typical Performance (at 25°C)

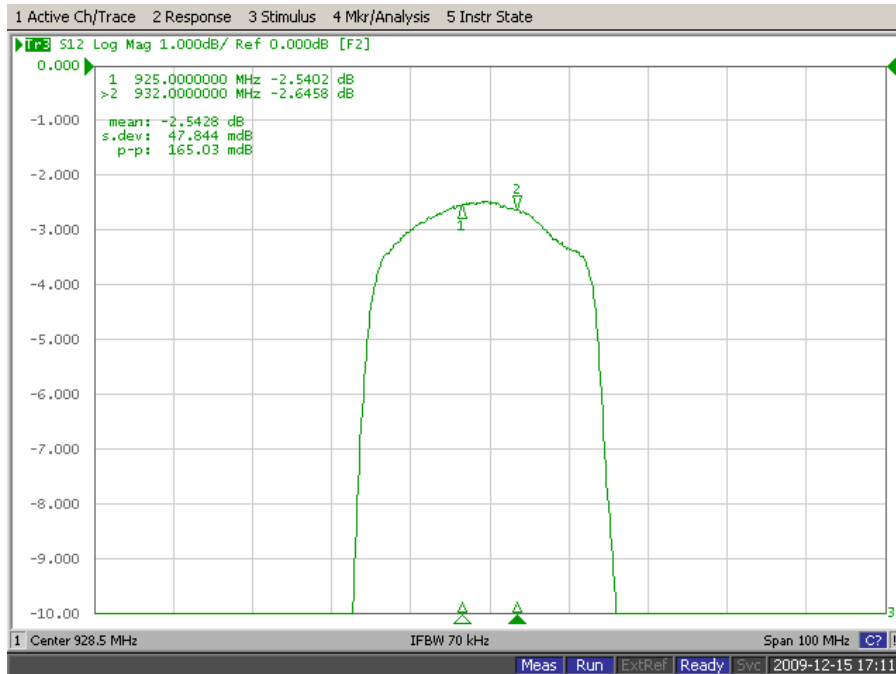
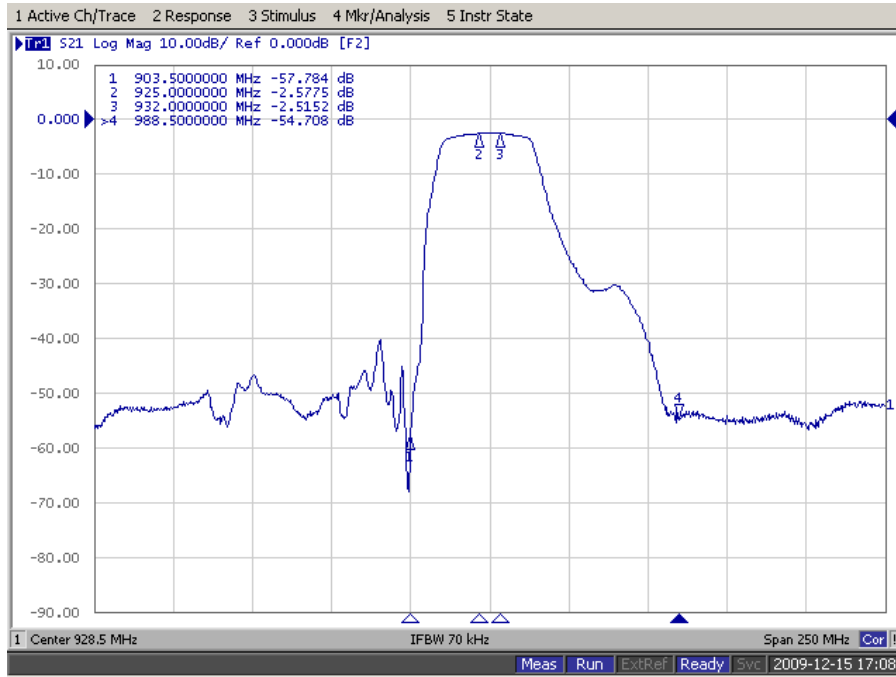


 <p>ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809</p>	Part No.	F9282	
	Rev. Date	2010-11-05	
	Rev.	NRLK01-AS01	4/7



SAW Bandpass Filter F9282



Input / Output VSWR Charts

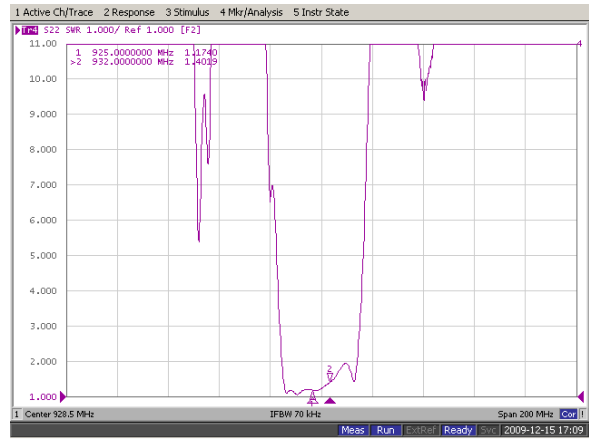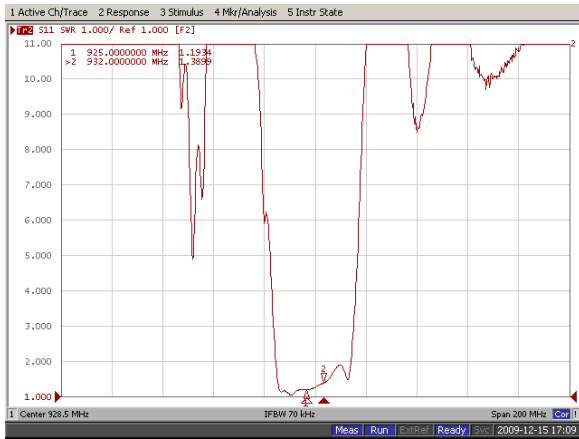

Input / Output Smith Charts

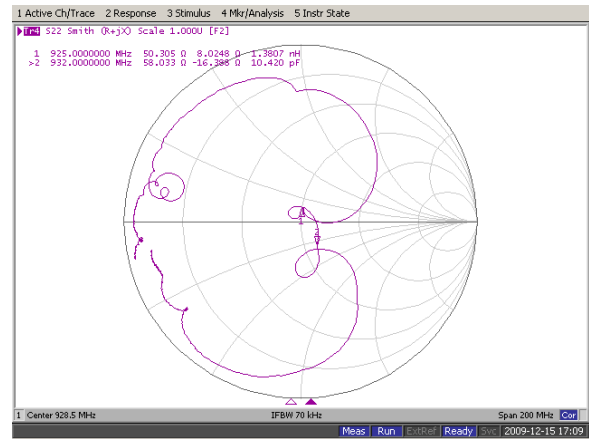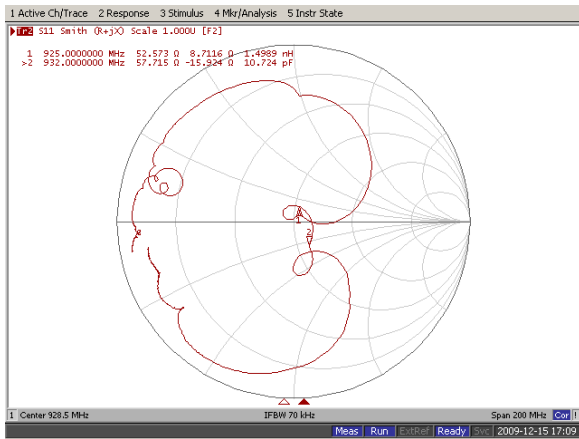


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9282	
		Rev. Date	2010-11-05	
		Rev.	NRLK01-AS01	5/7

SAW Bandpass Filter F9282




Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

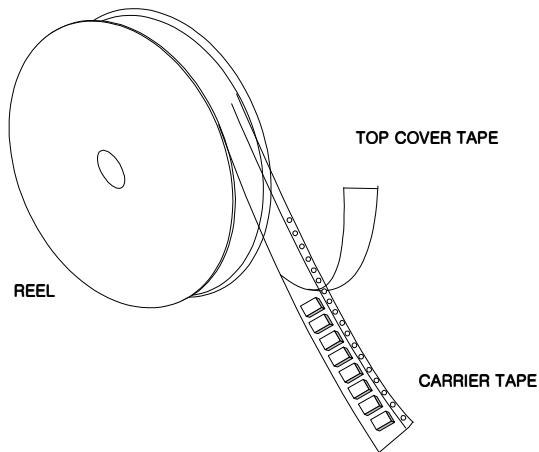

Tape Specification

1. Leader part and vacant position specification

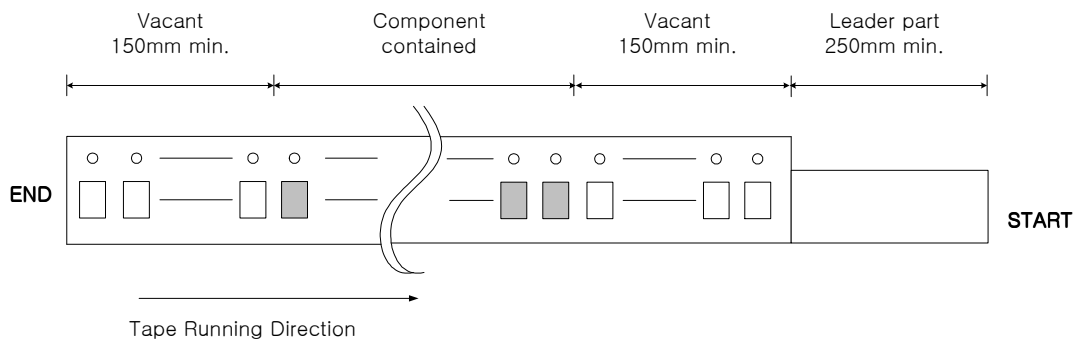



2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

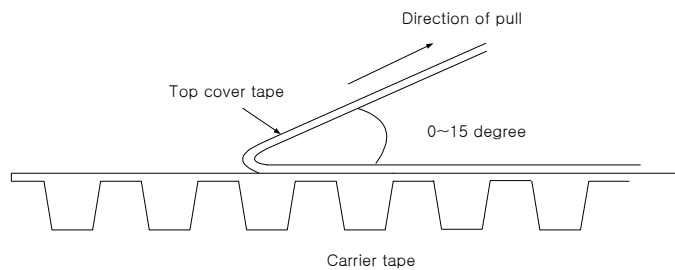

 <p>ITF Integrated Technology Future</p>	<p>ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809</p>	Part No.	F9282	
		Rev. Date	2010-11-05	
		Rev.	NRLK01-AS01	6/7

