


# SAW Bandpass Filter F4672



## Features

- RF Band Pass Filter
- No impedance matching require for operation at 50 Ω
- Ceramic Surface Mounted Device Package ( 3.0 mm × 3.0 mm )
- Single-ended Operation
- RoHS Compliant

## Package Dimensions

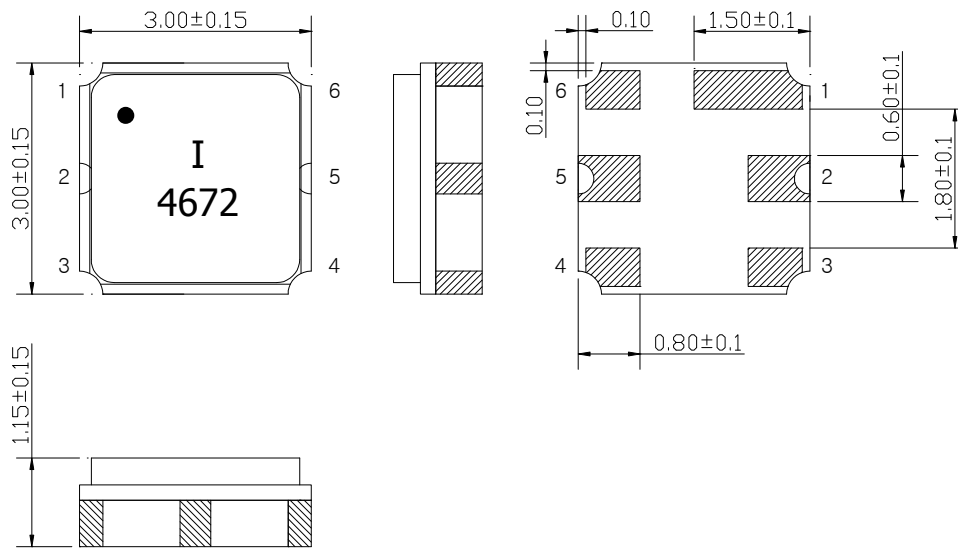

Dimensions shown are nominal in millimeters

Body : Al<sub>2</sub>O<sub>3</sub> Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um  
Ni Plating

Pin Configurations	
2	Input
5	Output
1, 3, 4, 6	Case ground

## Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-30	25	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	1/7

# SAW Bandpass Filter F4672




## Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fc )	-	467	-	MHz
Insertion Loss (466~468 MHz)	-	2.7	3.2	dB
Amplitude Ripple (466~468 MHz)	-	0.3	0.8	dB
VSWR (466~468 MHz)	-	1.5	2.0	
Relative Attenuation				
417 ~ 452 MHz	46	51	-	dB
497 ~ 517 MHz	50	60	-	
Temperature Range (Operational)	-30	25	85	°C
Input/Output Impedance		50		Ohms

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	2/7

# SAW Bandpass Filter F4672



## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

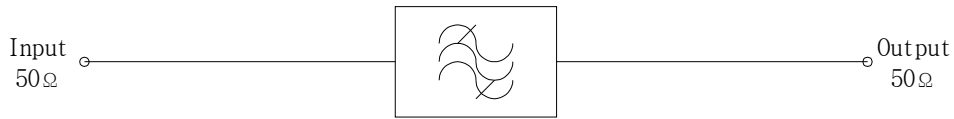

## Marking Configuration

●<sup>1)</sup>  
I<sup>2)</sup>  
4672<sup>3)</sup>

- 1) Pad Number 1 Index
- 2) Manufacturer name
- 3) Marking Number



\* Ink or Laser Marking available


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	3/7

# SAW Bandpass Filter F4672



## Typical Performance ( at 25°C )

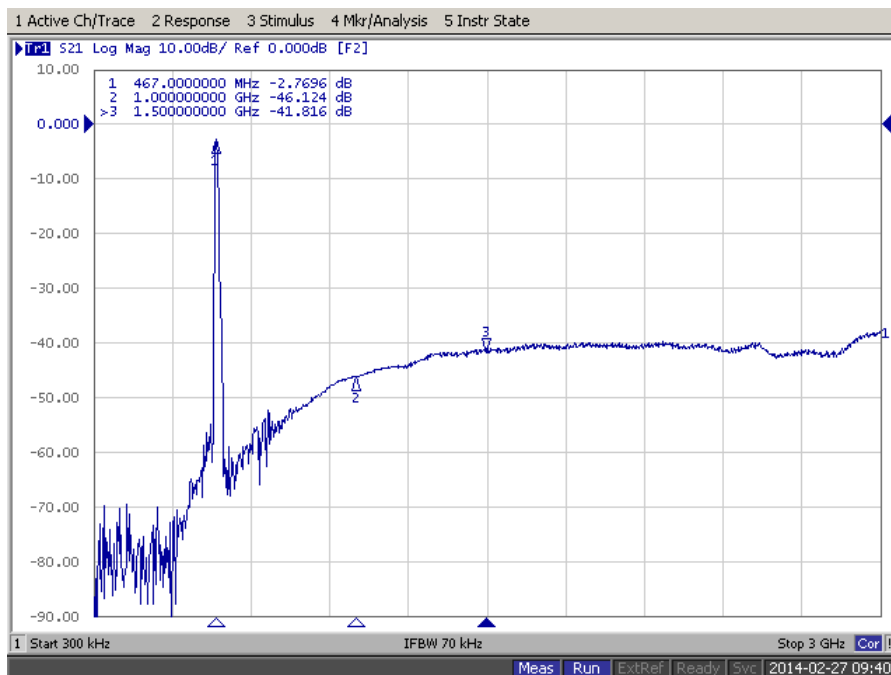
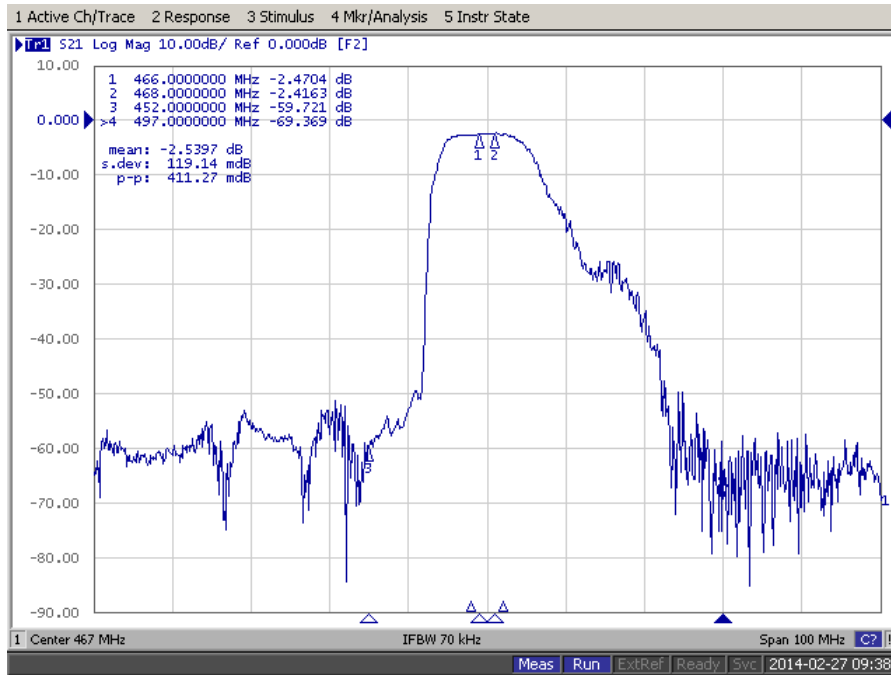


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	4/7



# SAW Bandpass Filter F4672



## Input / Output VSWR Charts

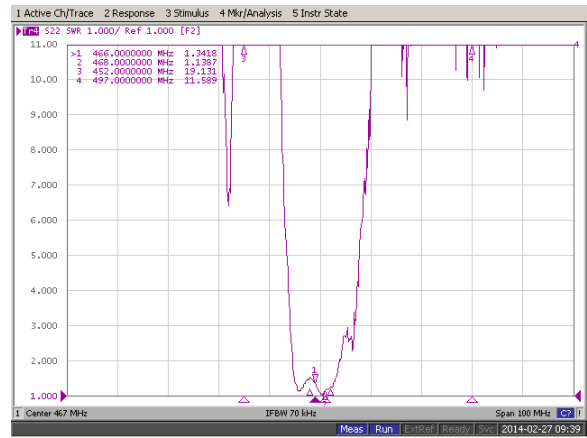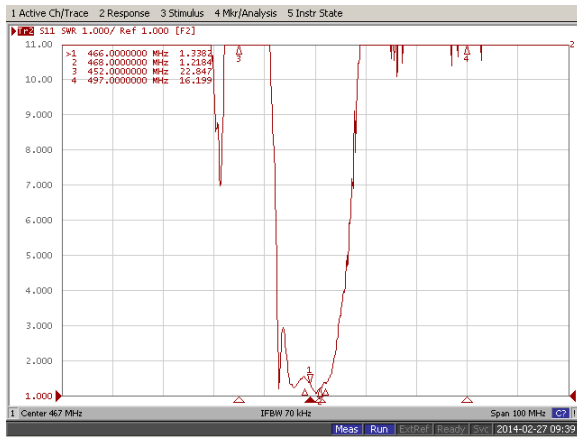

## Input / Output Smith Charts

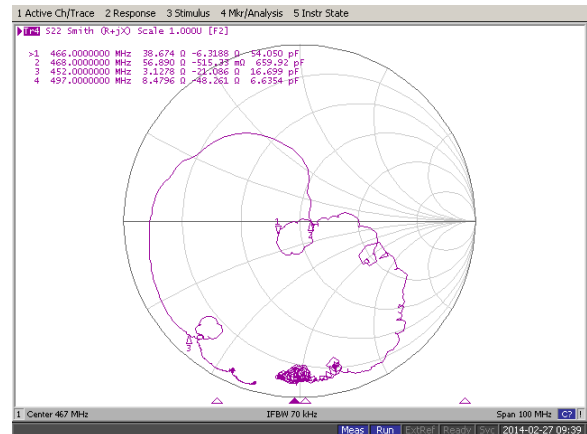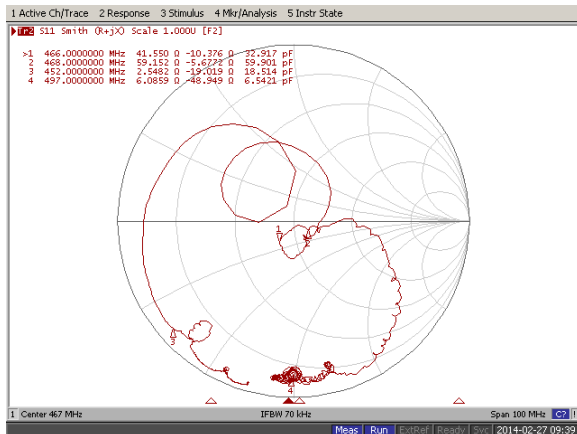


**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	F4672	
Rev. Date	2014-05-23	
Rev.	NRPE01-AS01	5/7


## Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel ( or 1000 pcs / 7" reel )
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

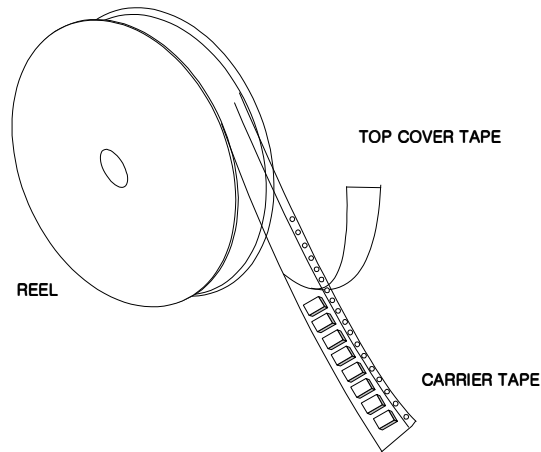

## Tape Specification

1. Leader part and vacant position specification

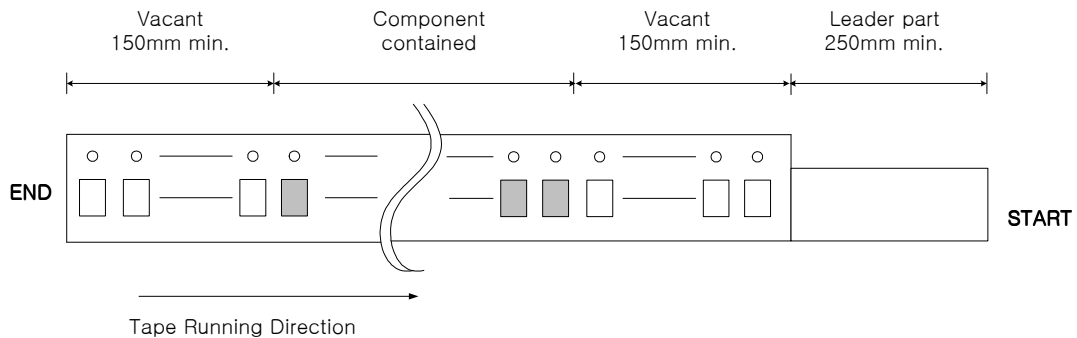


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

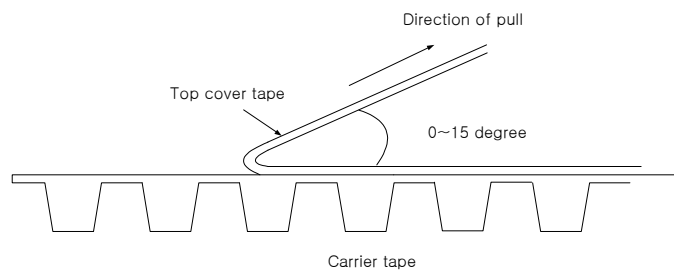


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	6/7

# SAW Bandpass Filter F4672




## Carrier Tape Dimensions [unit : mm]

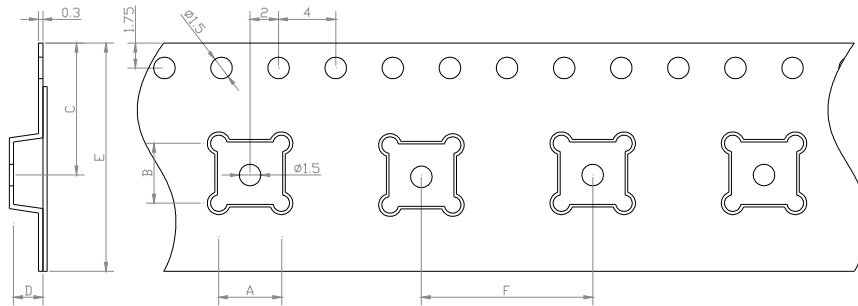



A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

## Part Direction

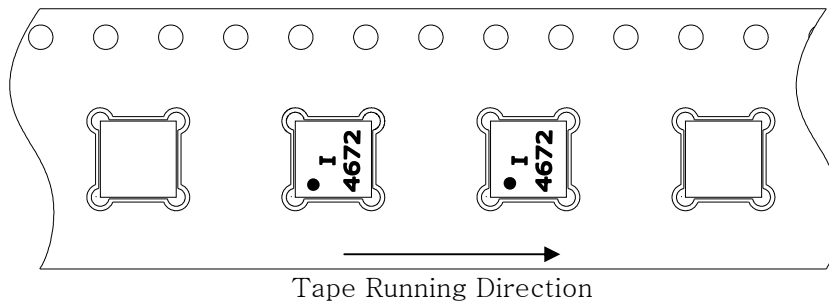

## Reel Dimensions [unit : mm]

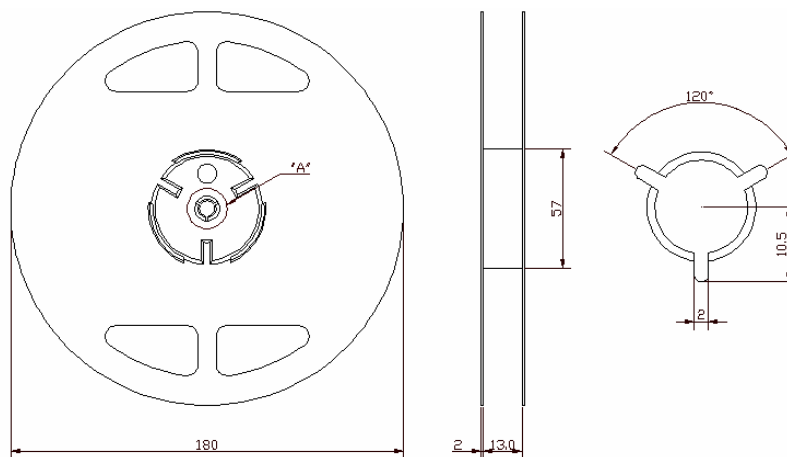

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2014-05-23	
		Rev.	NRPE01-AS01	7/7