


# LC Bandpass Filter IFL00580

## Features

- LC bandpass filter
- 50Ω single-ended operation
- Surface Mounted Package ( 25mm × 15.5mm × 6.5mm )


## Package Dimensions

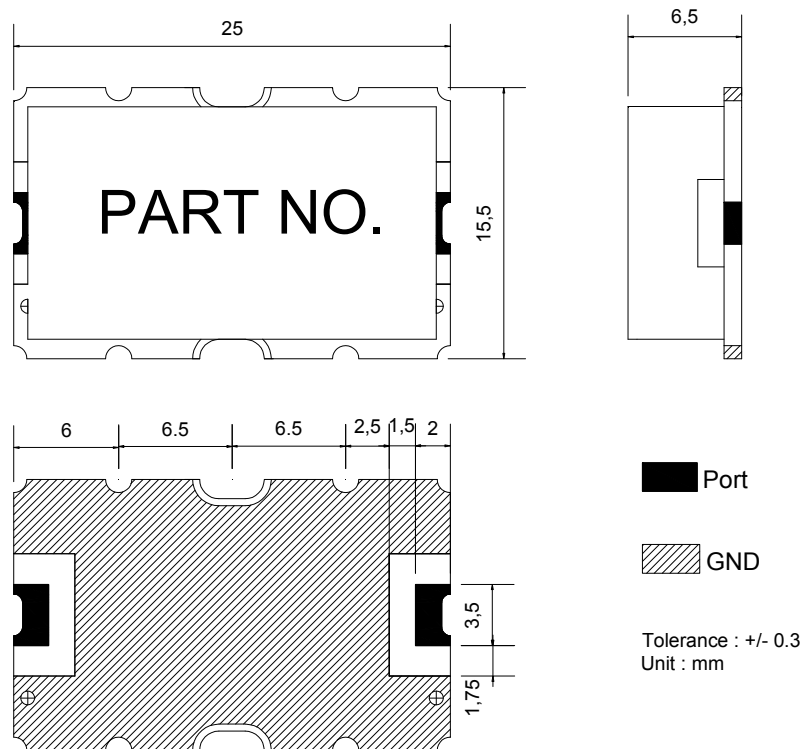

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-40	25	85
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	Watt	-	-	3.0

Electrostatics Sensitive Device (ESD)

 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL00580	
		Rev. Date	2014-10-02	
		Rev.	AS 01	1/3

# LC Bandpass Filter IFL00580

---


## Specifications

F<sub>o</sub> = 57.6 MHz

	Minimum	Typical	Maximum	Unit
Center Frequency ( F <sub>o</sub> )	-	57.6	-	MHz
Insertion Loss (42.6 ~ 72.6 MHz)	-	2.5	4.5	dB
Amplitude Ripple (42.6 ~ 72.6 MHz)	-	0.6	1.1	dB
VSWR (42.6 ~ 72.6 MHz)	1.5	1.8	-	-
Relative Attenuation @ 115.2 MHz	40.0	45.0	-	dB
Input/Output Impedance		50		Ohm

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL00580	
		Rev. Date	2014-10-02	
		Rev.	AS 01	2/3

# LC Bandpass Filter IFL00580

---

## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )




## Marking Configuration

PART NO. <sup>1)</sup>

1) Part Number

\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL00580	
		Rev. Date	2014-10-02	
		Rev.	AS 01	3/3