


# LC Bandpass Filter IFL01187

## Features

- LC bandpass filter
- 50Ω single-ended operation
- Surface Mounted Package ( 16.5mm × 11.5mm × 6.0mm )


## Package Dimensions

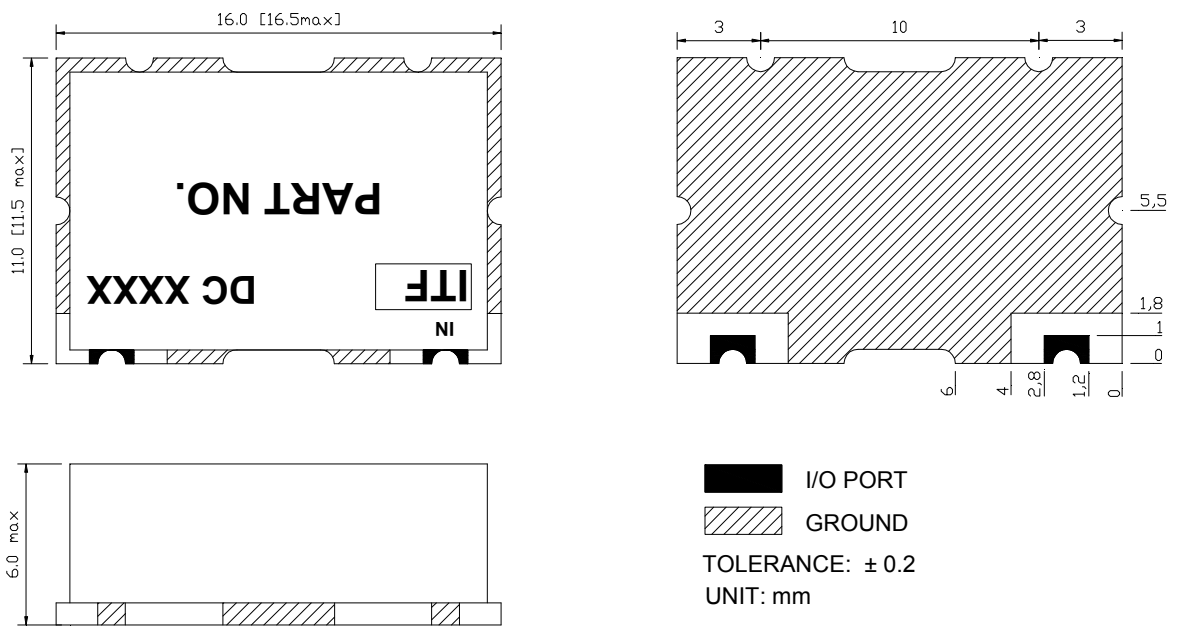

## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-40	25	85
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	Watt	-	-	3.0

Electrostatics Sensitive Device (ESD)

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL01187	
		Rev. Date	2014-10-07	
		Rev.	AS 01	1/3

# LC Bandpass Filter IFL01187


## Specifications

Fo = 115.2 MHz

	Minimum	Typical	Maximum	Unit
Center Frequency ( Fo )	-	115.2	-	MHz
Insertion Loss (60.2 ~ 170.2MHz)	-	2.3	2.5	dB
Amplitude Ripple (60.2 ~ 170.2MHz)	-	0.3	0.5	dB
V.S.W.R (60.2 ~ 170.2MHz)	-	1.2	1.4	-
Relative Attenuation @ 230 MHz @ 10 MHz	10.0 40.0	15.0 45.0	- -	dB
Input/Output Impedance		50		Ohm

### Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL01187	
		Rev. Date	2014-10-07	
		Rev.	AS 01	2/3

# LC Bandpass Filter IFL01187

---

## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )




## Marking Configuration

PART NO..<sup>1)</sup>

1) Part Number

\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IFL01187	
		Rev. Date	2014-10-07	
		Rev.	AS 01	3/3