


SAW Bandpass Filter 203626B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

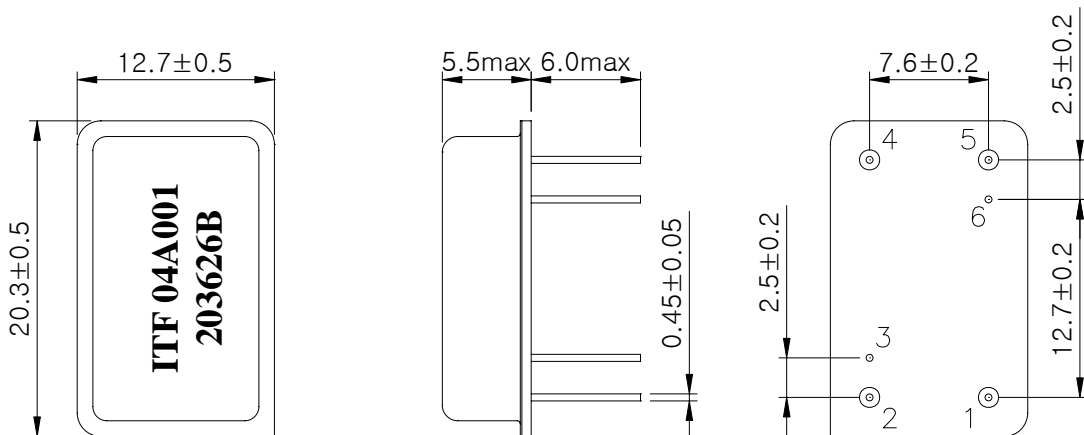

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
4	Output
2, 5	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203626B	
		Rev. Date	2004-05-06	
		Rev.	DS4010-CS01	1/5

SAW Bandpass Filter 203626B



3. Specifications

Fo = 150.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	150.0	-
Insertion Loss	dB	-	22.3	25.0
1dB Bandwidth	MHz	-	4.16	-
3dB Bandwidth	MHz	4.2	4.4	-
40dB Bandwidth	MHz	-	5.5	5.7
Amplitude Ripple (Fo +/- 1.92 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 1.92 MHz)	nsec	-	120	200
Absolute Delay	usec	-	2.56	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203626B	
		Rev. Date	2004-05-06	
		Rev.	DS4010-CS01	2/5

SAW Bandpass Filter 203626B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

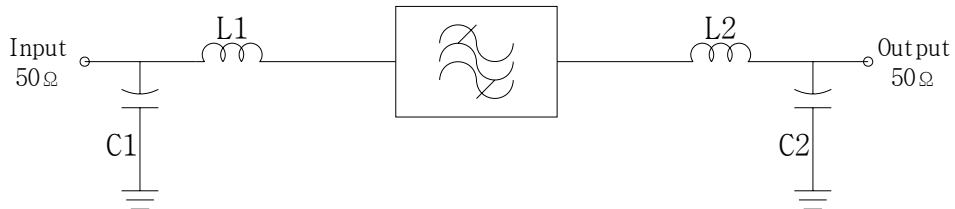


L1 = 82 nH, L2 = 82 nH
C1 = 36 pF, C2 = 56 pF

5. Marking Configuration

ITF¹⁾04A001²⁾
203626B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	203626B	
		Rev. Date	2004-05-06	
		Rev.	DS4010-CS01	3/5

SAW Bandpass Filter 203626B



6. Typical Performance (at +25°C)

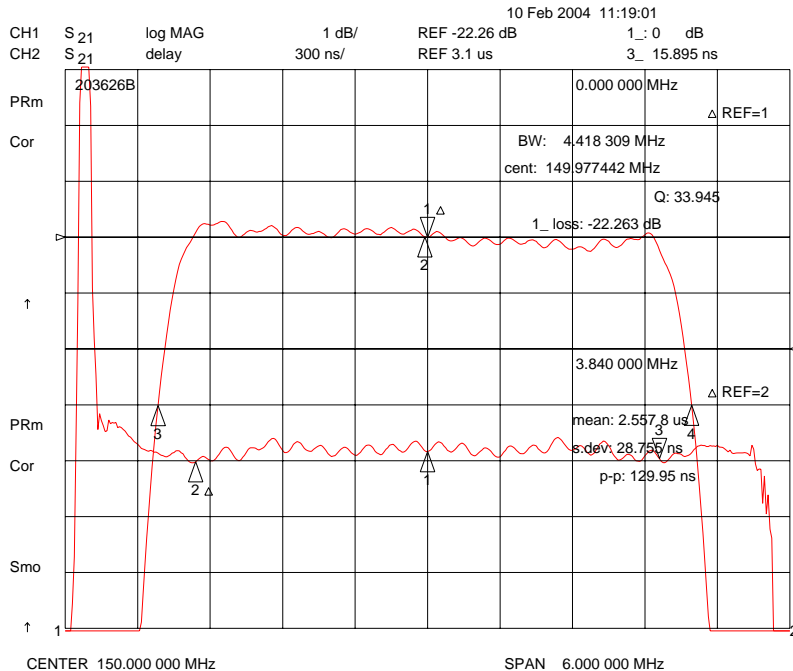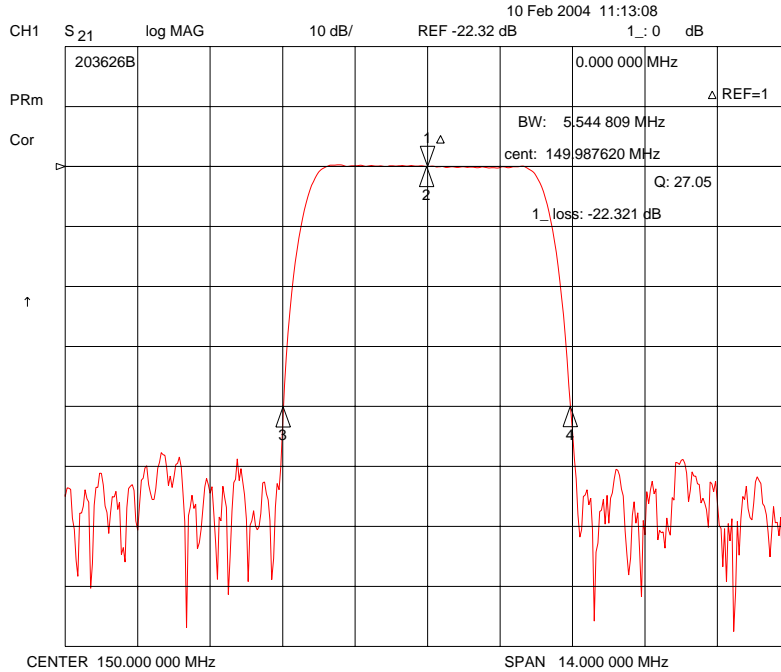





ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No. 203626B

Rev. Date 2004-05-06

Rev. DS4010-CS01 4/5

SAW Bandpass Filter 203626B

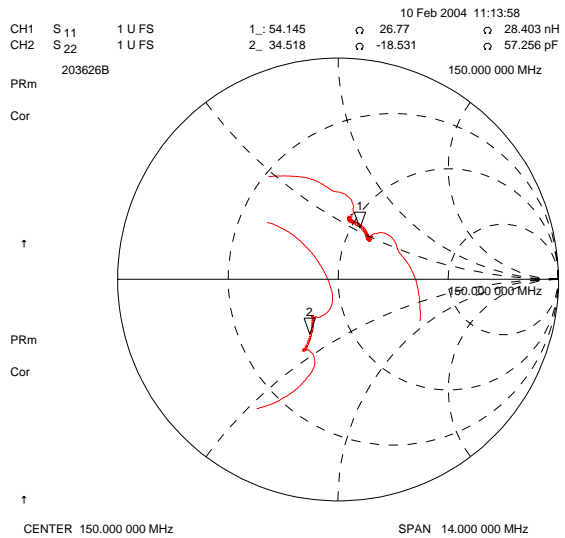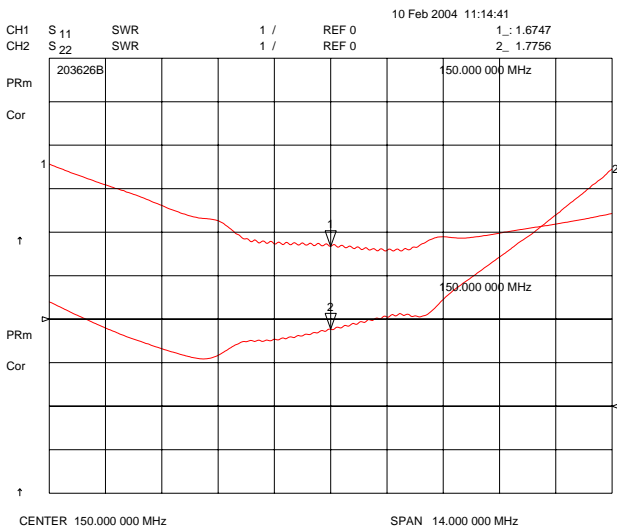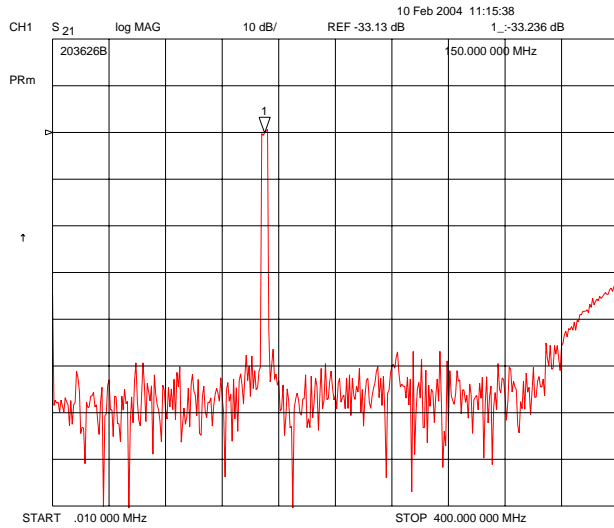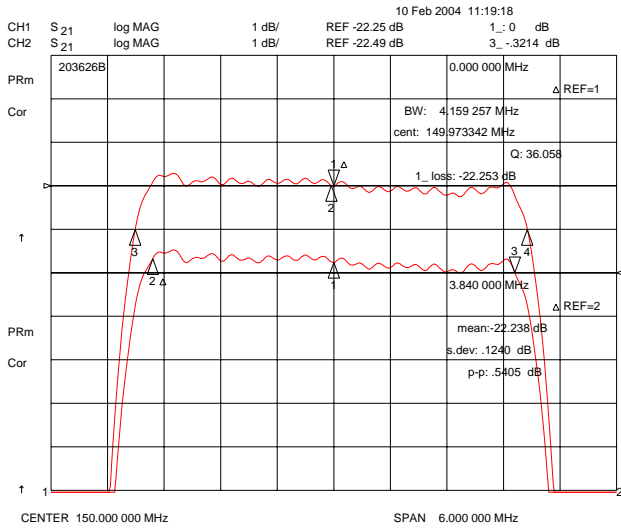

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	203626B	
Rev. Date	2004-05-06	
Rev.	DS4010-CS01	5/5