


SAW Bandpass Filter 271907B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -30°C ~ 80°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

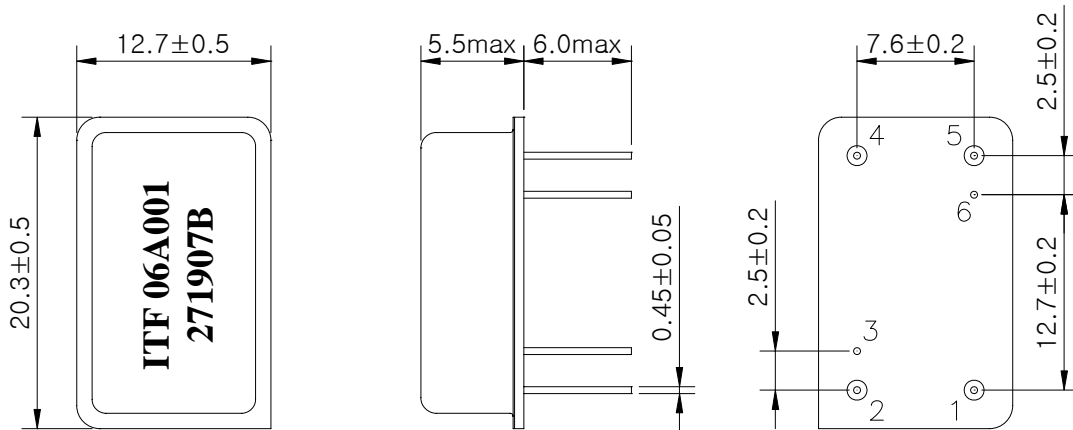

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271907B	
		Rev. Date	2006-09-11	
		Rev.	NM6026-CS01	1/5

SAW Bandpass Filter 271907B



3. Specifications

Fo = 70.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : +0℃ ~ +60℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	22.5	25.0
1dB Bandwidth	MHz	-	19.14	-
3dB Bandwidth	MHz	19.2	19.44	-
40dB Bandwidth	MHz	-	20.75	21.0
Amplitude Ripple (Fo +/- 9.22 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 9.22 MHz)	nsec	-	50	100
Absolute Delay	usec	-	2.35	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/℃	-	-80	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	22.5	25.0
Amplitude Ripple (Fo +/- 9.375 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 9.375 MHz)	nsec	-	50	100

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271907B	
		Rev. Date	2006-09-11	
		Rev.	NM6026-CS01	2/5

SAW Bandpass Filter 271907B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

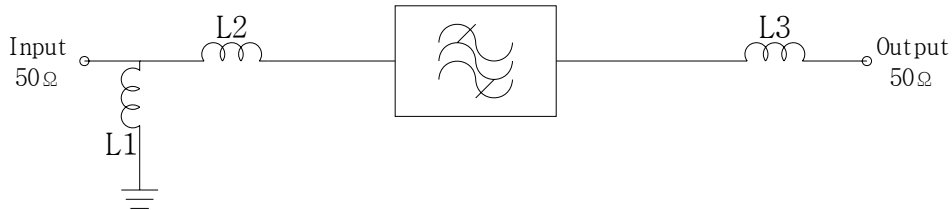

L1 = 220nH, L2 = 120nH

L3 = 120nH

5. Marking Configuration

ITF¹⁾ 06A001²⁾
271907B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271907B	
		Rev. Date	2006-09-11	
		Rev.	NM6026-CS01	3/5

SAW Bandpass Filter 271907B







6. Typical Performance (at +25°C)

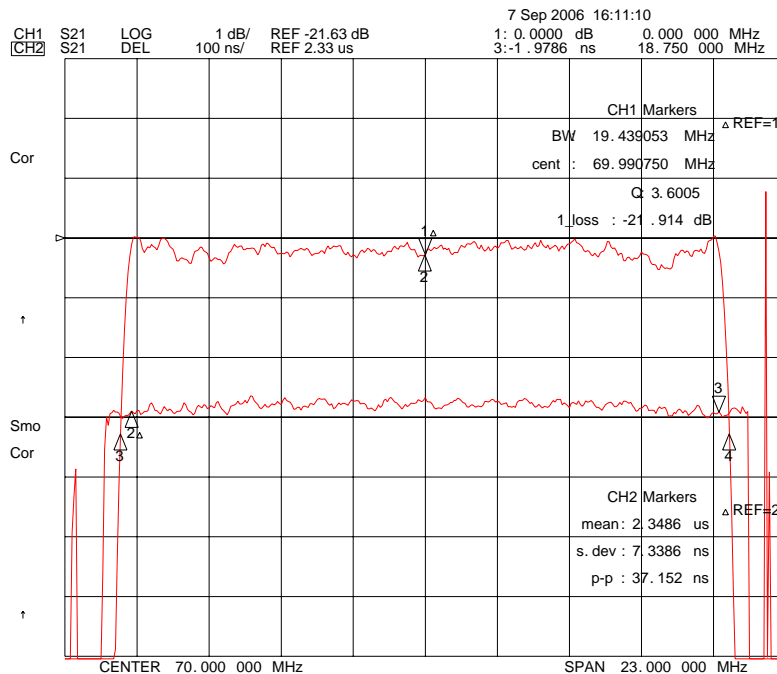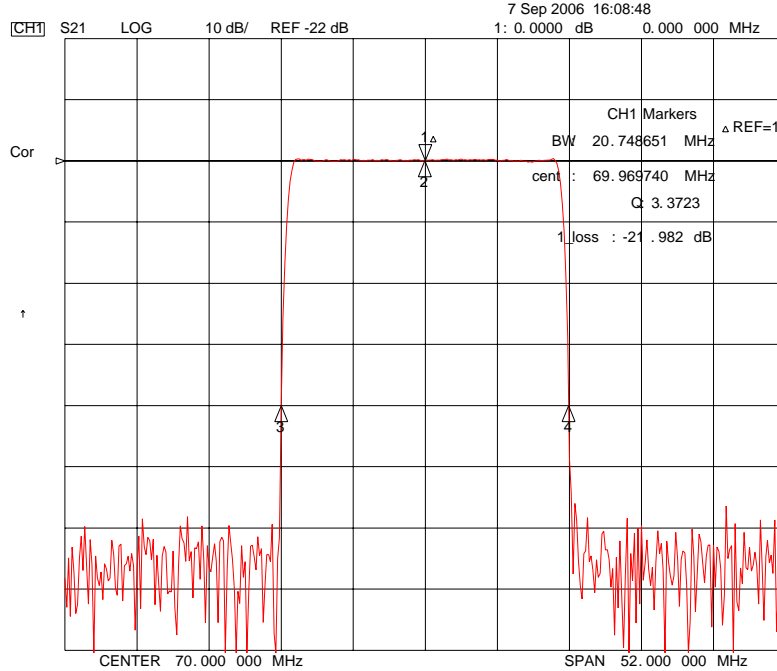

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271907B	
		Rev. Date	2006-09-11	
		Rev.	NM6026-CS01	4/5

SAW Bandpass Filter 271907B

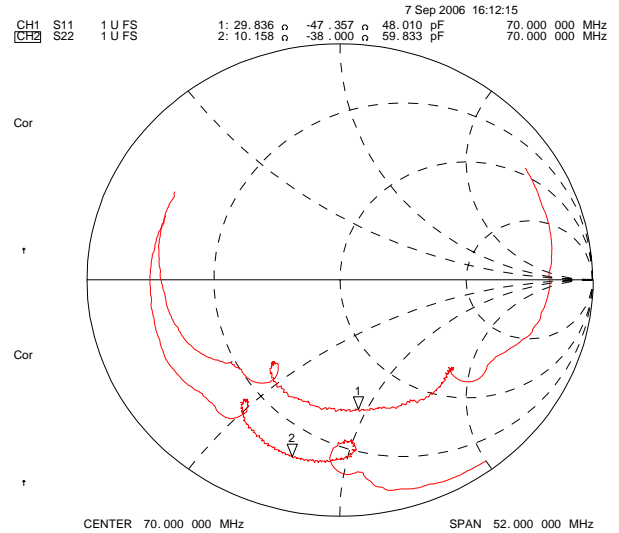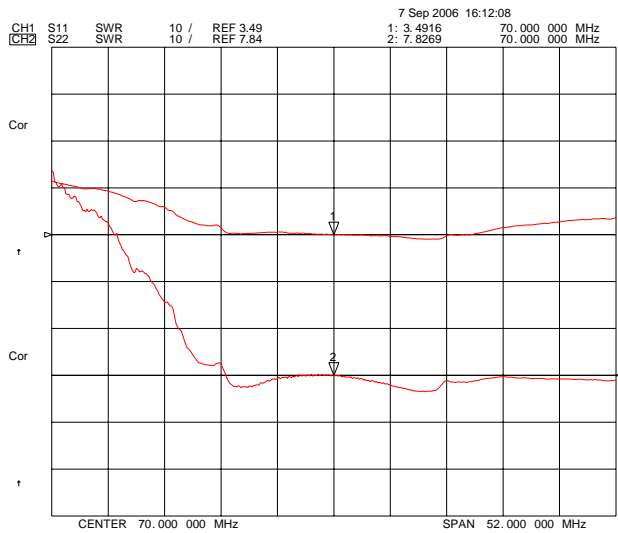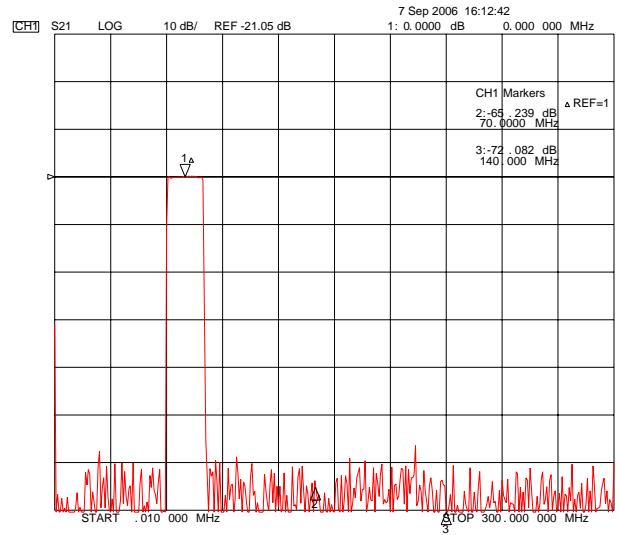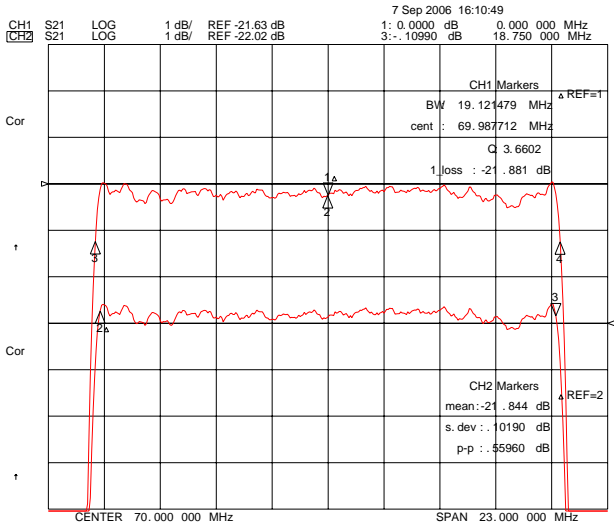

ITF Co., Ltd.
 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809

Part No. 271907B

Rev. Date 2006-09-11

Rev. NM6026-CS01 5/5