


SAW Bandpass Filter 271003B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

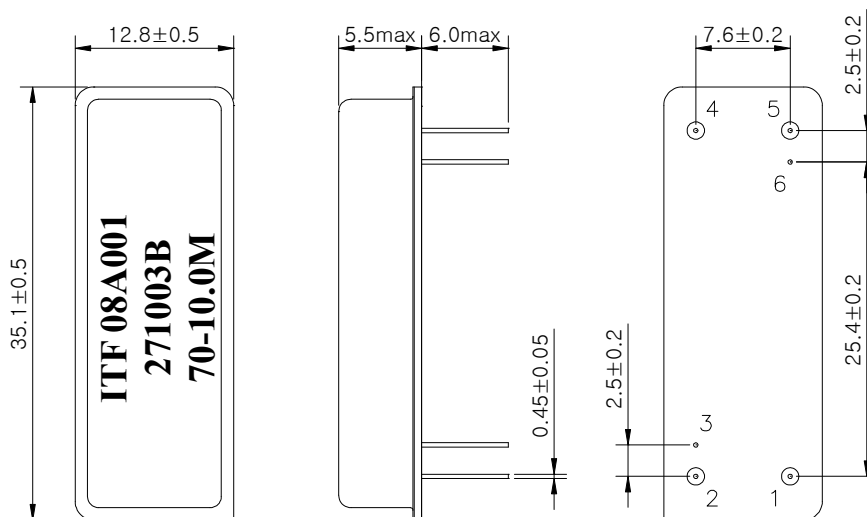

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271003B	
		Rev. Date	2008-11-07	
		Rev.	NM8043-CS01	1/5

SAW Bandpass Filter 271003B



3. Specifications

Fo = 70.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	22.5	24.0
2dB Bandwidth	MHz	9.9	10.0	-
25dB Bandwidth	MHz	-	10.7	10.8
40dB Bandwidth	MHz	-	10.86	-
Amplitude Ripple (fo ± 4.75 MHz)	dB	-	0.5	1.0
Group Delay Variation (fo ± 5.75 MHz)	nsec	-	55	100
Absolute Delay	usec	-	3.37	-
Ultimate Rejection	dB	48	52	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271003B	
		Rev. Date	2008-11-07	
		Rev.	NM8043-CS01	2/5

SAW Bandpass Filter 271003B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

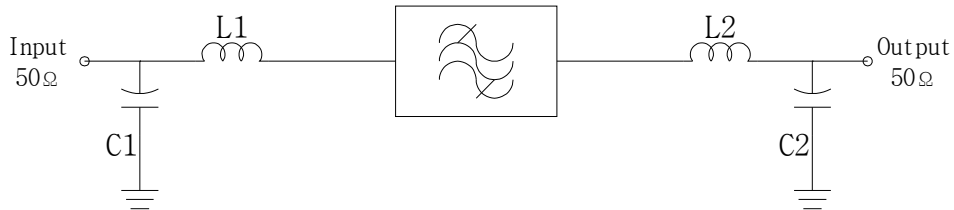

$$L1 = L2 = 68\text{nH}$$

$$C1 = C2 = 39\text{pF}$$

5. Marking Configuration

ITF¹⁾ 08A001²⁾

271003B³⁾

70⁴⁾ -10.0M⁵⁾


1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 2dB-Bandwidth

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271003B	
		Rev. Date	2008-11-07	
		Rev.	NM8043-CS01	3/5

SAW Bandpass Filter 271003B







6. Typical Performance (at +25°C)

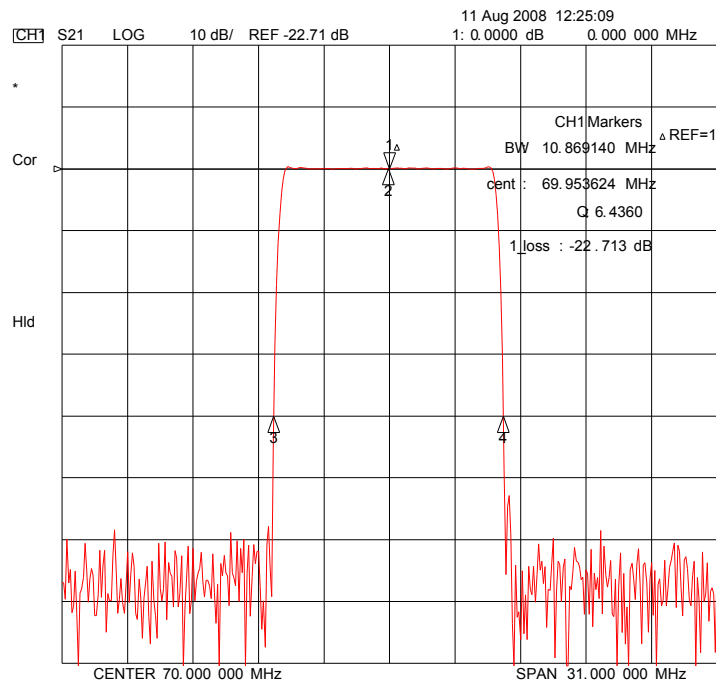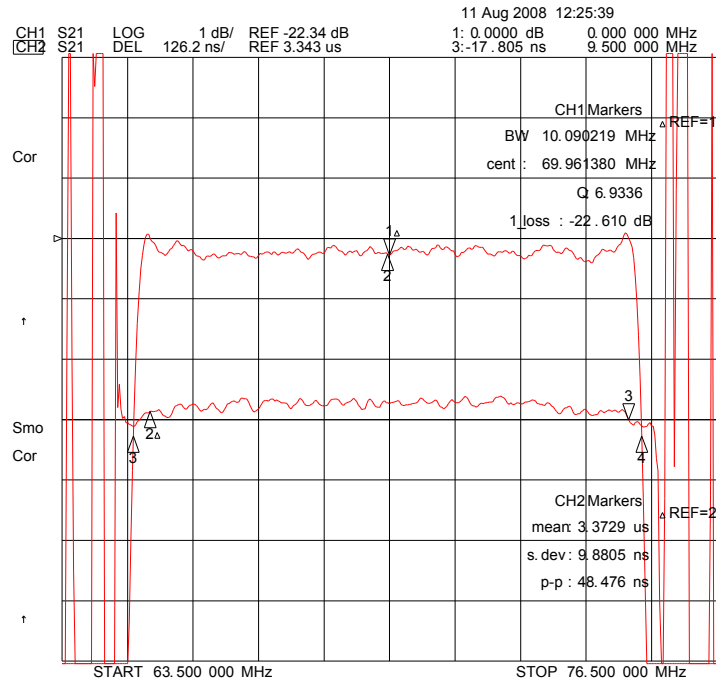

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	271003B	
Rev. Date	2008-11-07	
Rev.	NM8043-CS01	4/5

SAW Bandpass Filter 271003B

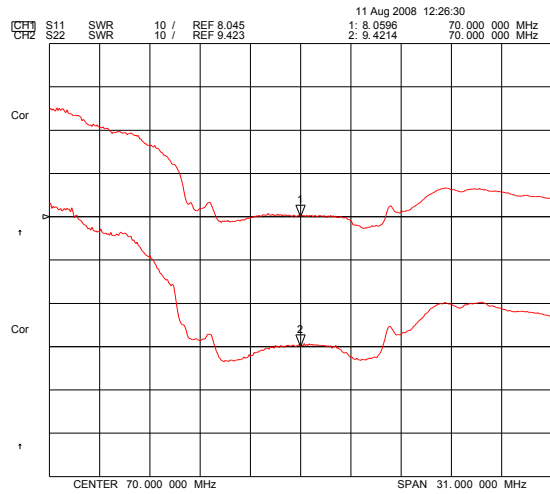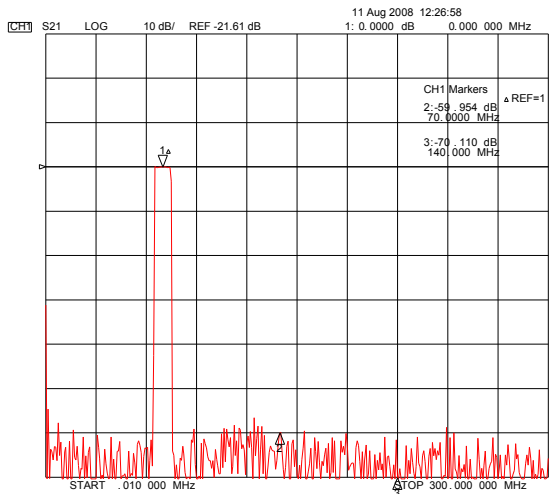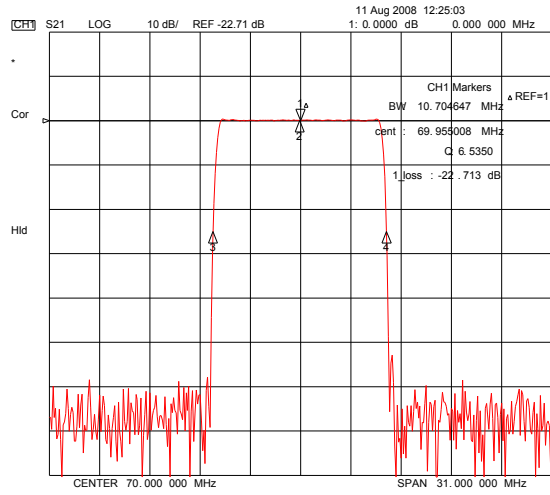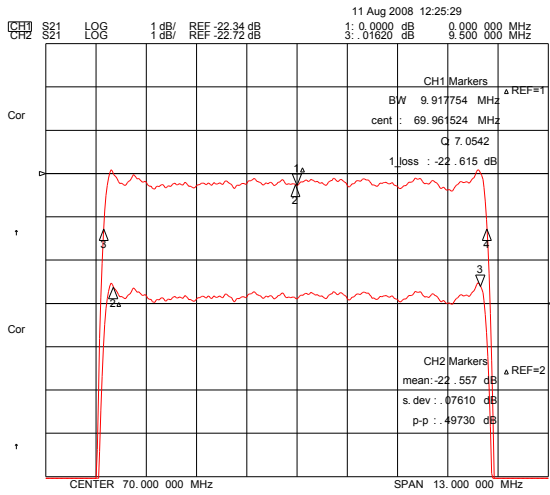

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	271003B	
		Rev. Date	2008-11-07	
		Rev.	NM8043-CS01	5/5