

SAW Bandpass Filter – F2G3M


2332.5MHz – 25MHz



Features

- RF Bandpass Filter
- No matching 50Ω single-ended operation
- Surface Mounted Device Package (1.1 mm * 0.9 mm * 0.5mm)
- RoHS/RoHS2 (2015/863/EU) Compliant
- This part is compliant with AEC-Q200

Package Dimensions

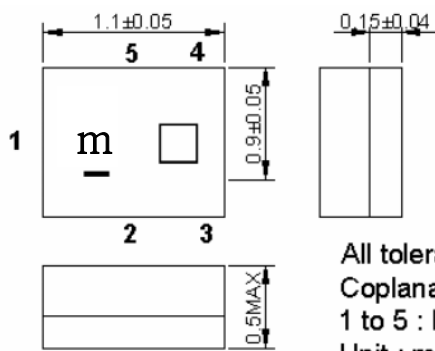


All tolerances are +/-0.05 mm unless otherwise specified

Coplanarity : 0.1 mm max.

1 to 5 : Pin No.

Unit : mm



1 : Input

4 : Output

2, 3, 5 : Ground

Maximum Ratings

Rating		Value	Unit
DC Voltage (between any Terminals)	V DC	3	V
RF Power (in BW)	P	10	dBm
Operating Temperature Range	TA	-40 ~ +105	°C
Storage Temperature Range	Tstg	-40 ~ +125	°C
ESD Voltage (HB)	VESD	100	V
Moisture Sensitivity Levels	MSL	2A	

** Electrostatics Sensitive Device (ESD)

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	1/6

SAW Bandpass Filter – F2G3M

2332.5MHz – 25MHz




Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency (Fc)	-	2332.5	-	MHz
Insertion Loss @ 25 °C (2320 ~ 2345 MHz)	-	0.35	0.55	dB
Insertion Loss @ Max (2320 ~ 2345 MHz)	-	0.35	0.58	
Ripple (2320 ~ 2345 MHz)	-	0.08	0.35	dB
VSWR (2320 ~ 2345 MHz)	-	1.15	1.5	-
Attenuation				dB
698 ~ 1990MHz	7	9.5	-	
2400 ~ 2484 MHz	7	10.5	-	
2484 ~ 3400 MHz	8	10	-	
3400 ~ 3500 MHz	9	10.5	-	
Input/Output Impedance		50		Ohms

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

Typical Performance (at 25°C)


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	2/6

SAW Bandpass Filter – F2G3M


2332.5MHz – 25MHz




- Insertion Loss & Ripple

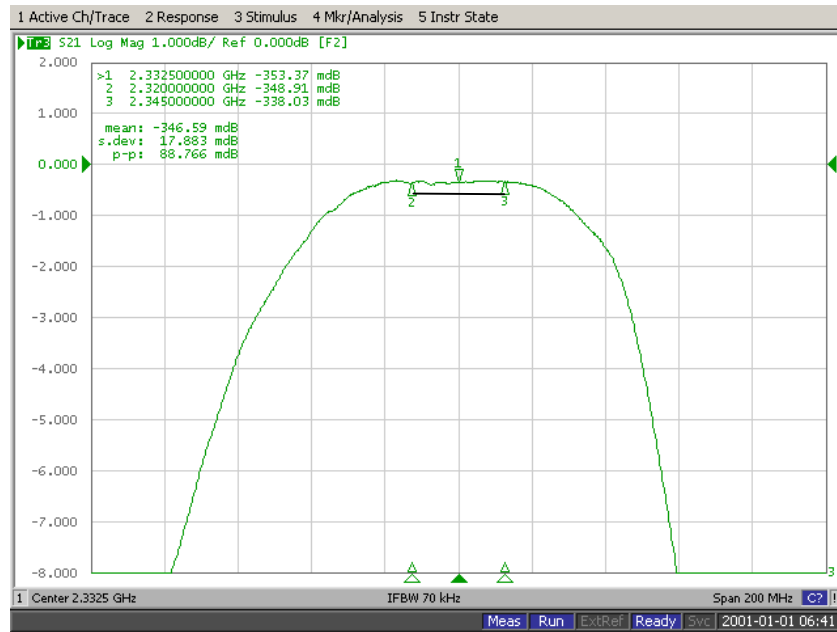

- Attenuation

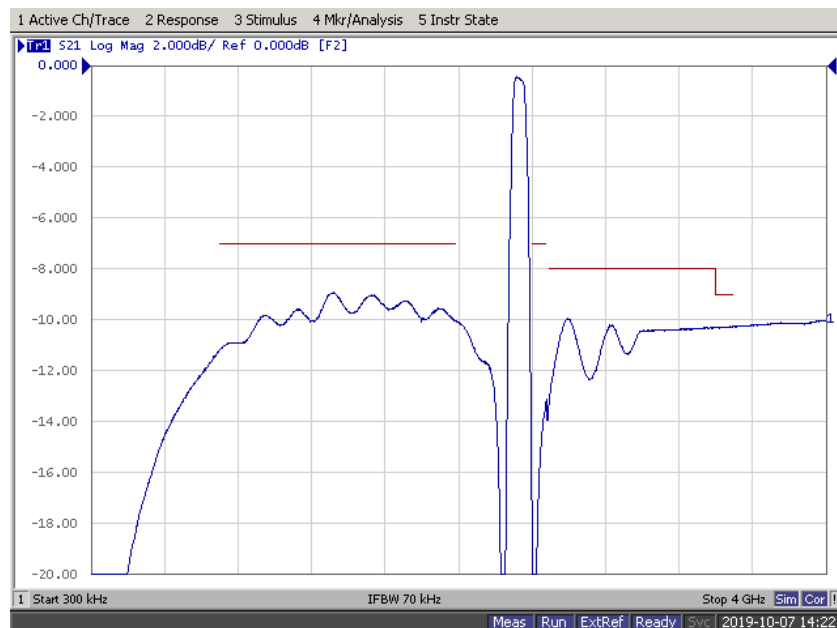


- Input / Output VSWR


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	3/6

SAW Bandpass Filter – F2G3M

2332.5MHz – 25MHz

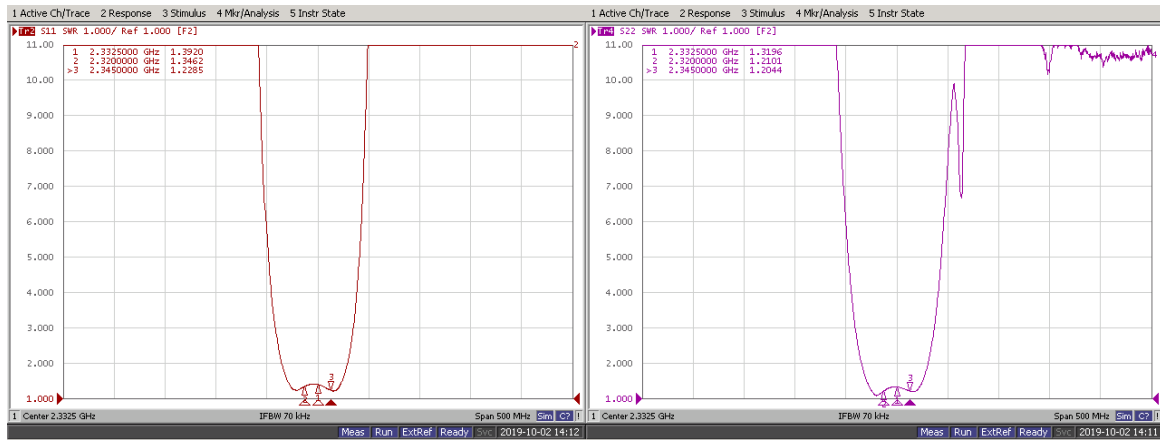

- Input / Output Smith Charts

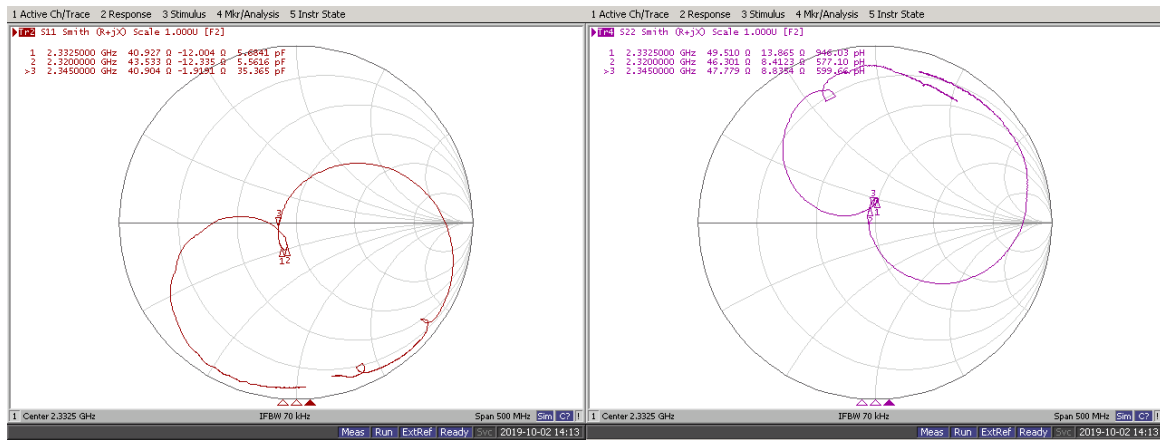


Measurement circuit


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	4/6

SAW Bandpass Filter – F2G3M


2332.5MHz – 25MHz

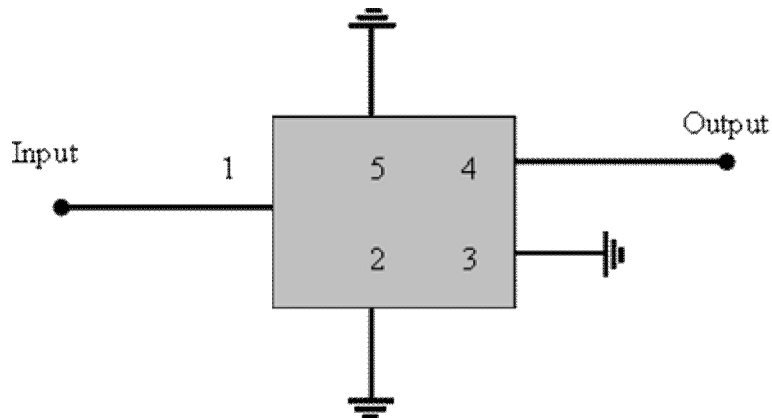

PCB Footprint

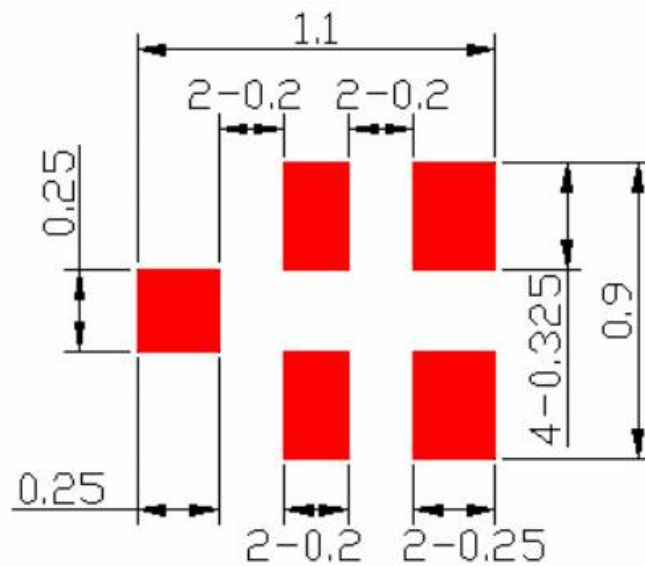

Marking Configuration

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	5/6

SAW Bandpass Filter – F2G3M

2332.5MHz – 25MHz



* Laser Marking

m¹⁾ □²⁾


1) m: Model Name


2) □: Year/Month code(Flow the table)

YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015	a	b	c	d	e	f	g	h	j	k	l	m
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	i	k	l	m
2020	n	p	q	r	s	t	u	v	w	x	y	z

Reflow Condition

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

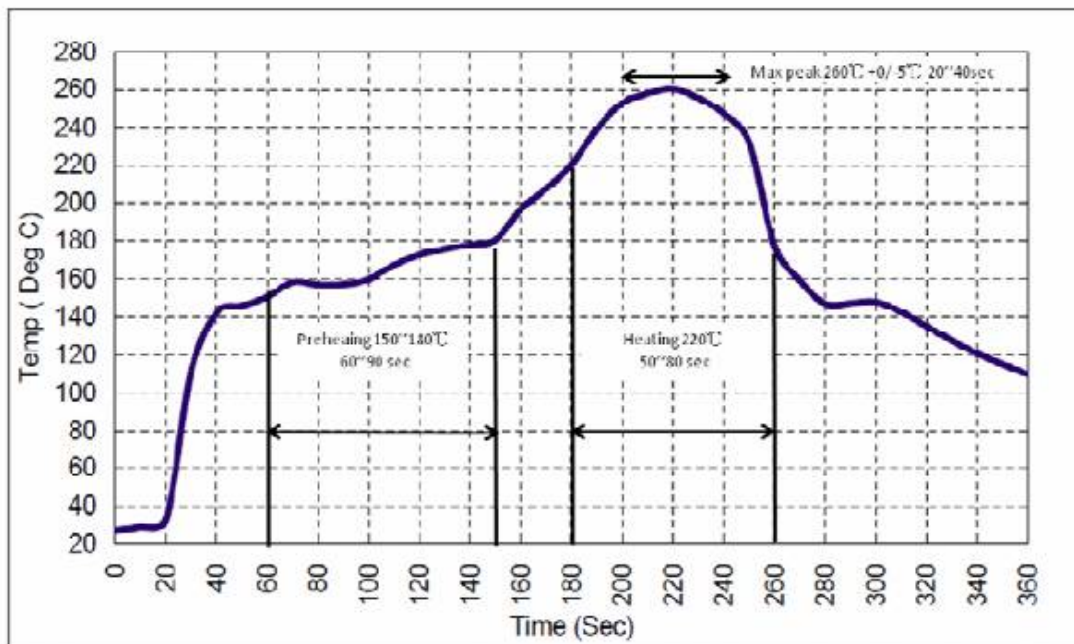

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F2G3M	
		Rev. Date	2019-10-07	
		Rev.	NRUJ01-AS02	6/6