


SAW Bandpass Filter F9533



Features

- RF bandpass filter for RF-ID System
- Usable bandwidth 2 MHz (952.0 MHz ~ 954.0 MHz)
- single-ended operation
- Ceramic Surface Mounted Device Package (3.8 mm × 3.8 mm)
- RoHS Compliant

Package Dimensions

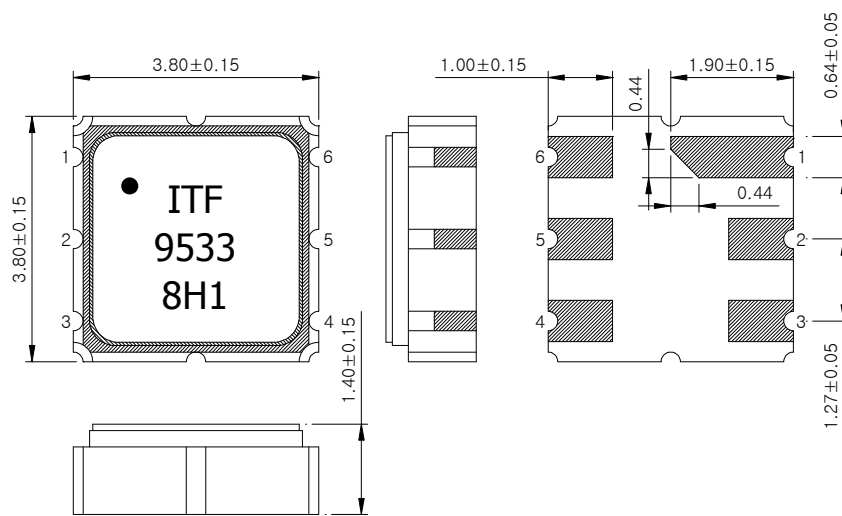

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated


Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pin Configurations	
2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	20

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9533	
		Rev. Date	2008-08-07	
		Rev.	NR8006-AS01	1/7

SAW Bandpass Filter F9533




Specifications

	Minimum	Typical	Maximum	Unit
Center Frequency (Fc)	-	953.0	-	MHz
Insertion Loss (In Fc ±1.0 MHz)	-	4.5	5.5	dB
Amplitude Ripple (In Fc ±1.0 MHz)	-	1.0	2.0	dB
VSWR (In Fc ±1.0 MHz)	-	2.0	3.0	
Relative Attenuation				
830.0 MHz ~ 840.0 MHz	30	35	-	dB
940.0 MHz ~ 945.0 MHz	20	25	-	
945.0 MHz ~ 948.0 MHz	15	20	-	
948.0 MHz ~ 950.0 MHz	12	16	-	
956.0 MHz ~ 958.0 MHz	25	30	-	
Input/Output Impedance		50		Ohm

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9533	
		Rev. Date	2008-08-07	
		Rev.	NR8006-AS01	2/7

SAW Bandpass Filter F9533



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

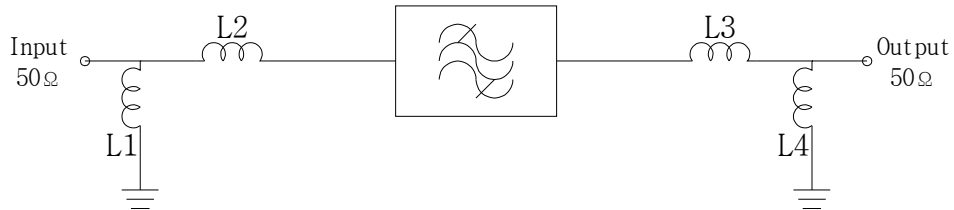

L1 = 3.9nH, L2 = L3 = 4.7nH, L4 = 3.3nH

Marking Configuration

- 1)
●
- ITF²⁾
- 9533³⁾
- 8H1⁴⁾


1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number

4) Lot Number



* Ink or Laser Marking available

	ITF Co., Ltd.	Part No.	F9533	
	102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Rev. Date	2008-08-07	
		Rev.	NR8006-AS01	3/7

SAW Bandpass Filter F9533



Typical Performance (at 25°C)

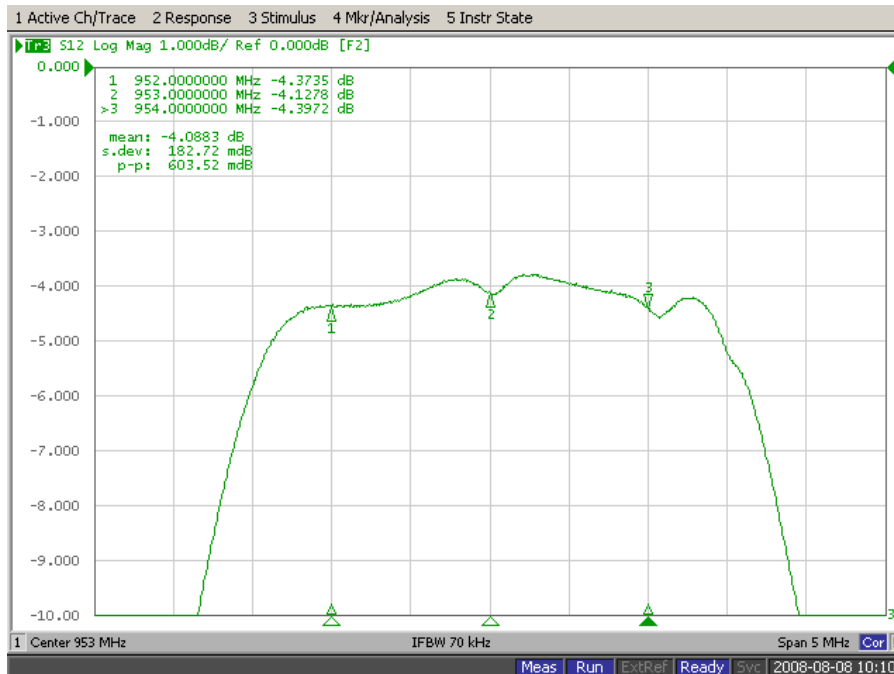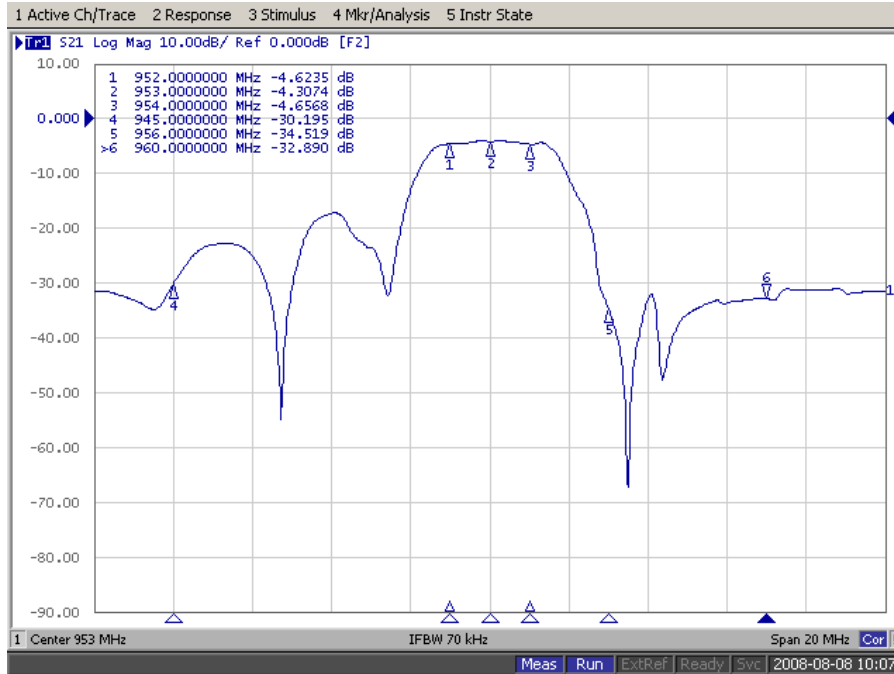


ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9533	
	Rev. Date	2008-08-07	
	Rev.	NR8006-AS01	4/7


SAW Bandpass Filter F9533



Input / Output VSWR Charts

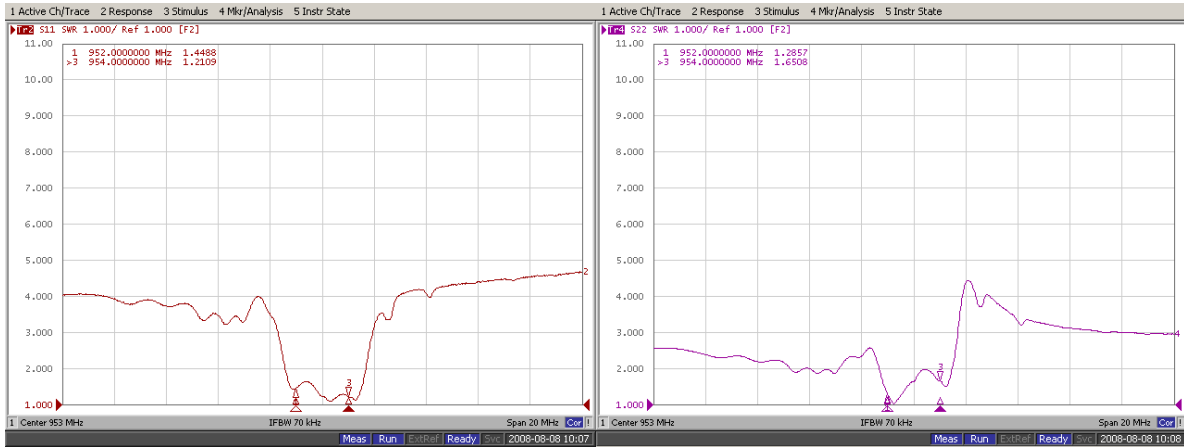

Input / Output Smith Charts

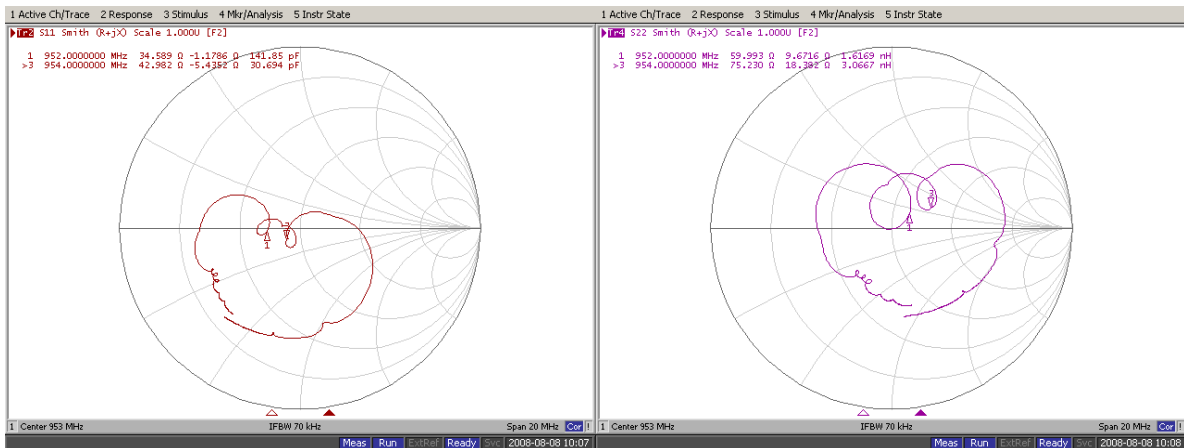

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809


Part No.	F9533	
Rev. Date	2008-08-07	
Rev.	NR8006-AS01	5/7

SAW Bandpass Filter F9533




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

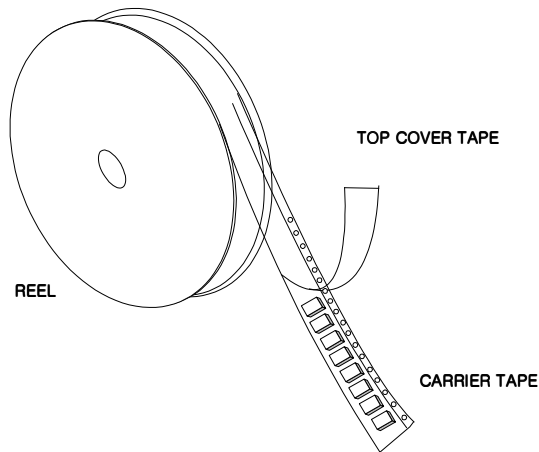

Tape Specification

1. Leader part and vacant position specification

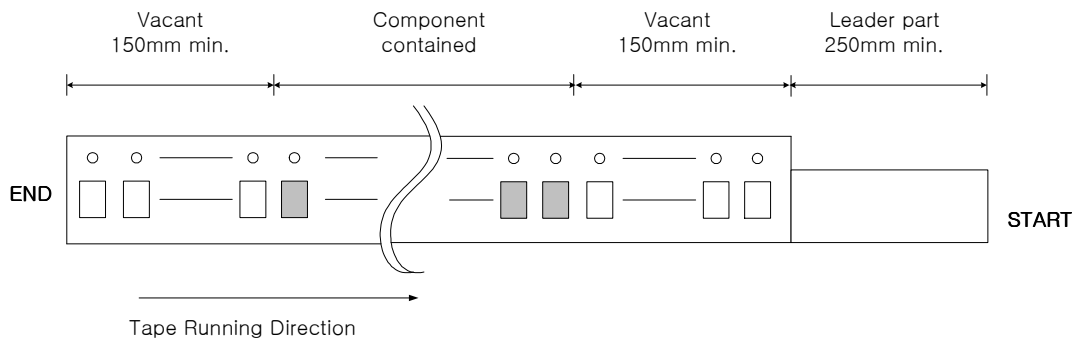


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

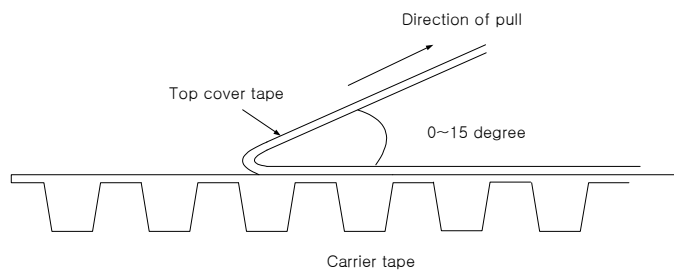


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9533	
		Rev. Date	2008-08-07	
		Rev.	NR8006-AS01	6/7

SAW Bandpass Filter F9533




Carrier Tape Dimensions [unit : mm]

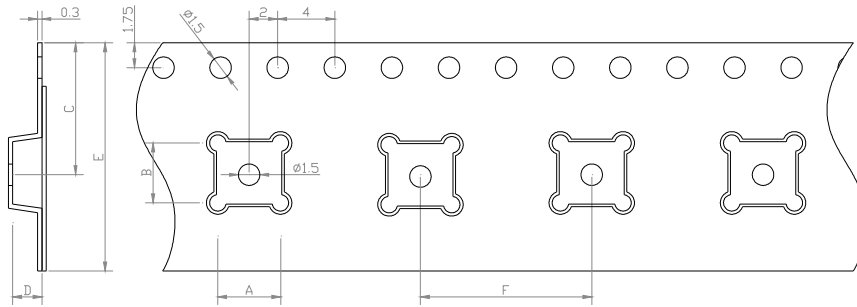


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

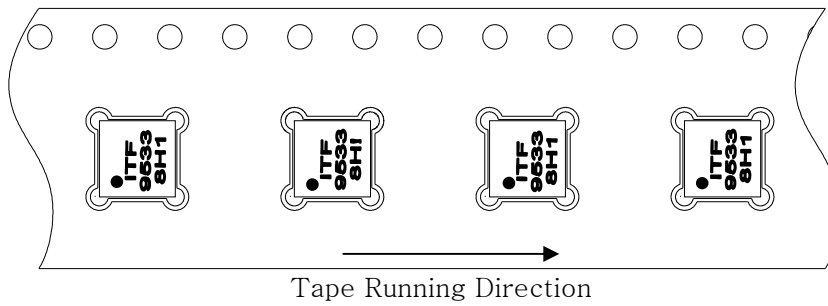

Reel Dimensions [unit : mm]

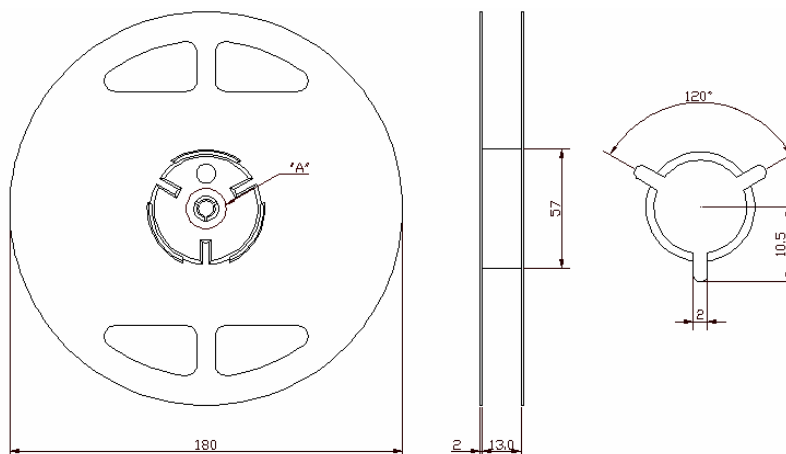

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9533	
		Rev. Date	2008-08-07	
		Rev.	NR8006-AS01	7/7