


SAW Bandpass Filter F4672



Features

- RF bandpass filter
- No impedance matching require for operation at 50 Ω
- Ceramic Surface Mounted Device Package (3.0 mm × 3.0 mm)
- Single-ended Operation
- RoHS/RoHS2 (2015/863/EU) Compliant

Package Dimensions

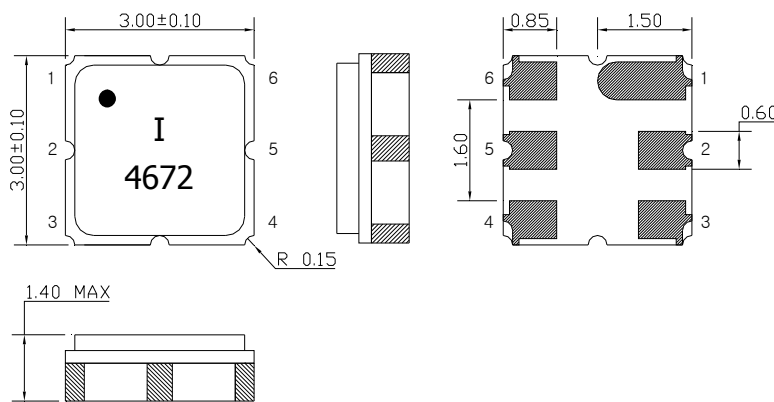

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-30	25	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	1/7

SAW Bandpass Filter F4672




Specifications

Fc = 467 MHz

		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	467	-
Insertion Loss	Fc ± 1.0 MHz	-	2.7	3.2
	Fc ± 2.0 MHz	-	2.7	3.2
Amplitude Ripple	Fc ± 1.0 MHz	-	0.3	0.8
	Fc ± 2.0 MHz	-	0.4	0.8
VSWR	Fc ± 1.0 MHz	-	1.5	2.0
	Fc ± 2.0 MHz	-	1.7	2.0
Absolute attenuation	417.0 ~ 452.0 MHz	46	51	-
	497.0 ~ 517.0 MHz	50	60	-
Input/Output impedance	Ohm	-	50	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	2/7

SAW Bandpass Filter F4672



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration


●¹⁾
I²⁾
4672³⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



* Ink or Laser Marking available

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	3/7

SAW Bandpass Filter F4672



Typical Performance (at 25°C)

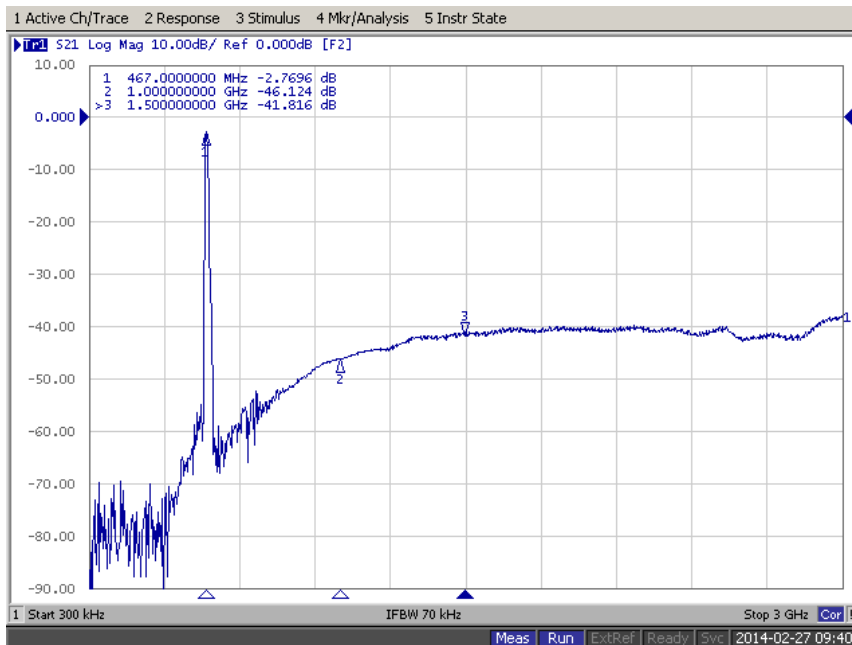
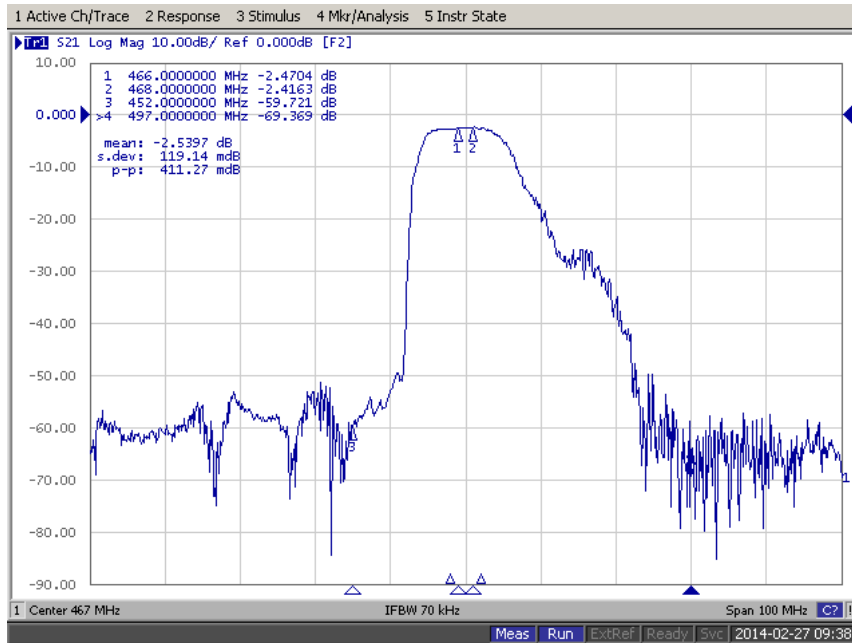


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	4/7



SAW Bandpass Filter F4672



Input / Output VSWR Charts

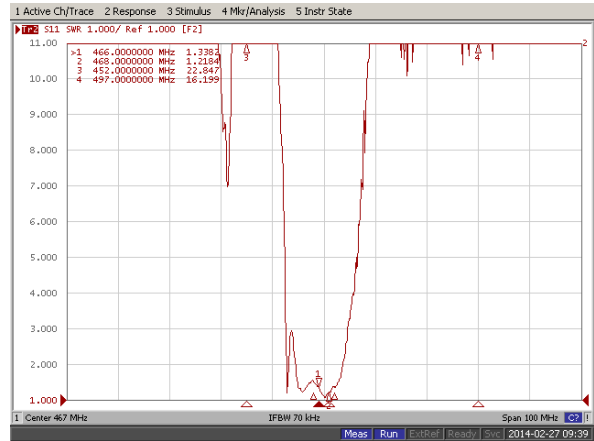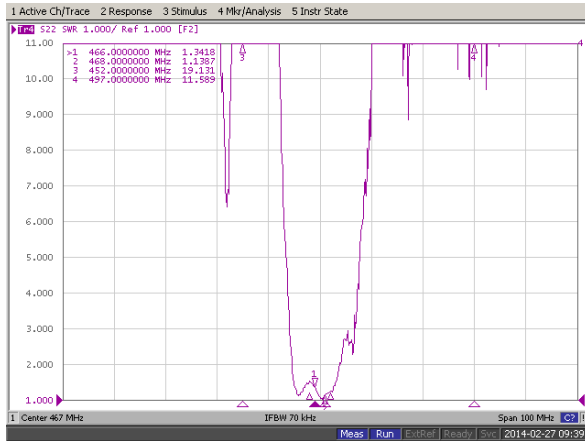

Input / Output Smith Charts

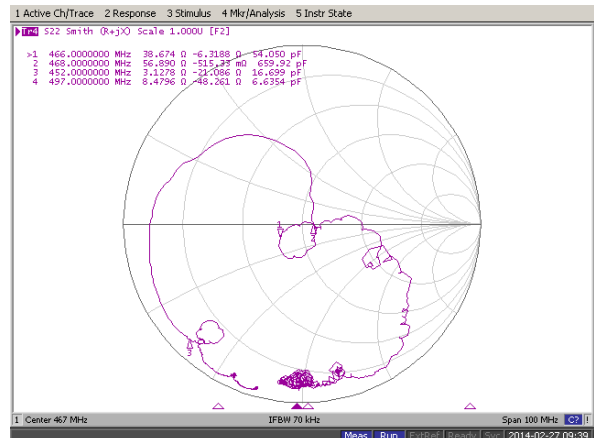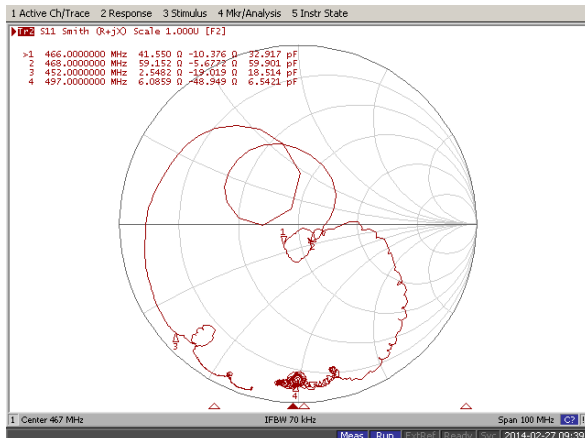


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	5/7

SAW Bandpass Filter F4672




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

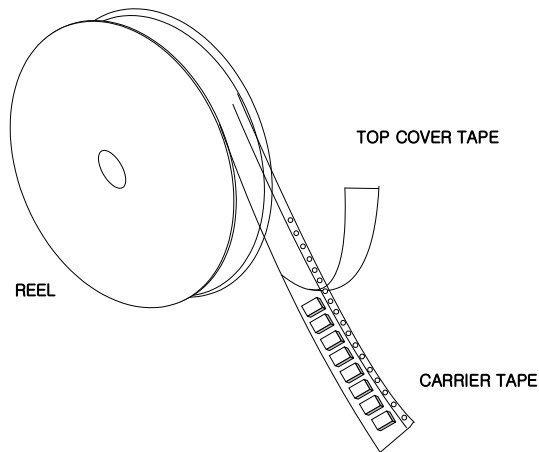

Tape Specification

1. Leader part and vacant position specification

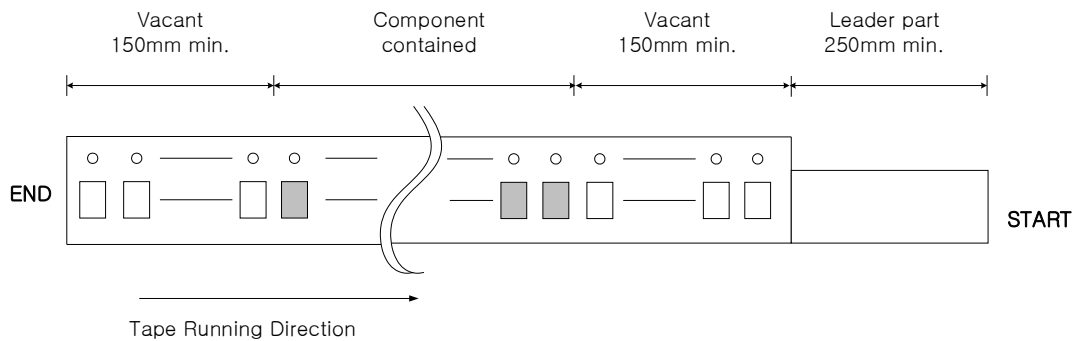


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

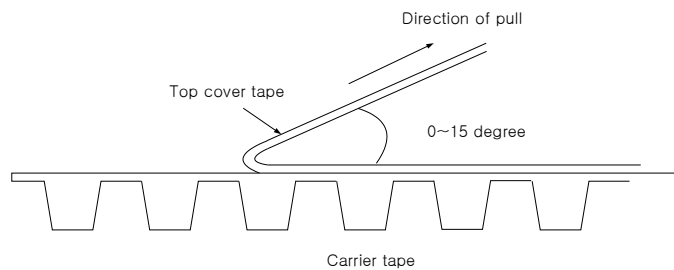


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	6/7

SAW Bandpass Filter F4672




Carrier Tape Dimensions [unit : mm]

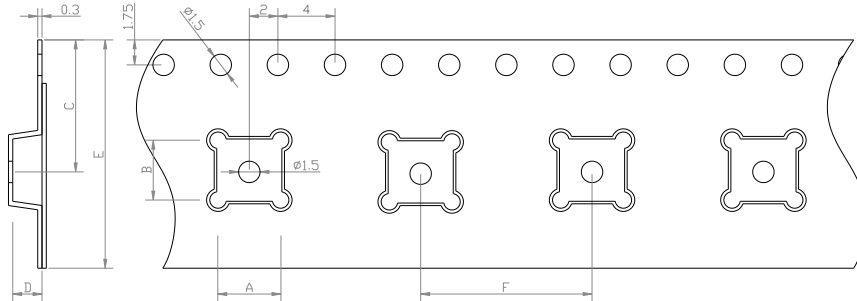


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

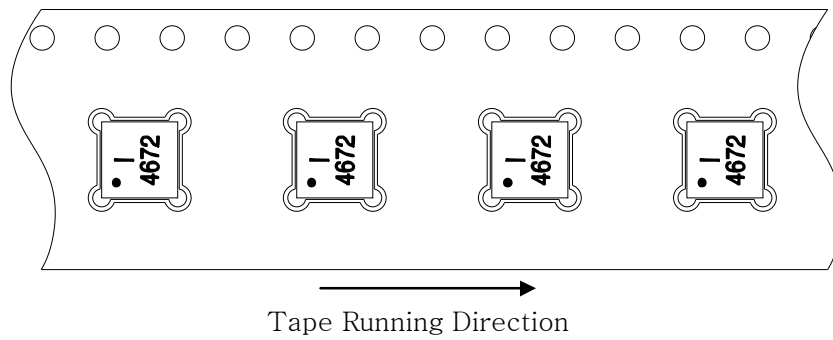

Reel Dimensions [unit : mm]

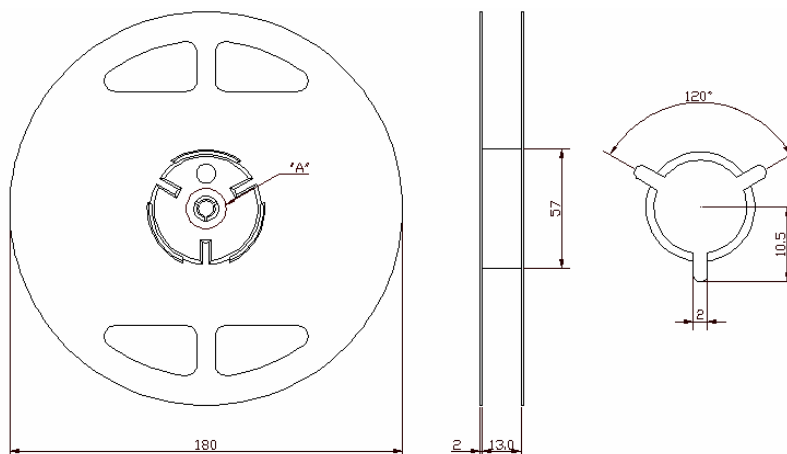

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F4672	
		Rev. Date	2019-06-11	
		Rev.	NRPE01-AS02	7/7