


LC DUPLEXER IDD00741

70 MHz / 120 MHz

Features

- LC Duplexer
- Usable bandwidth 5 MHz Rx. And Tx. band
- No matching / Antenna & Transmitter & Receiver Impedance 50Ω
- Surface Mounted Module Package (47mm × 15mm × 7mm)

Package Dimension

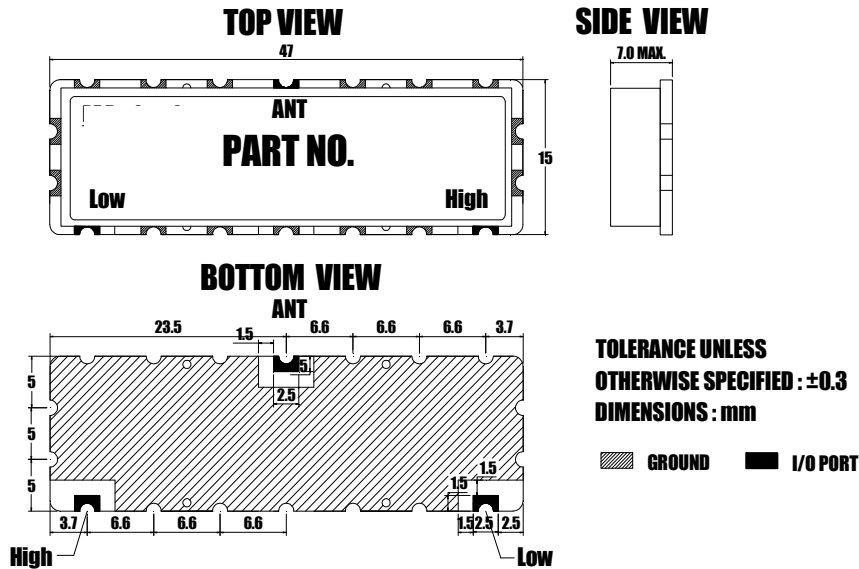


Pin Configuration	
Description	Function
RX (67.5~ 72.5MHz)	Low
ANT	ANTENNA
TX (117.5 ~ 122.5MHz)	High

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	+85
Storage Temperature Range	°C	-40	-	+85

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD00741	
		Rev. Date	2014-9-03	
		Rev.	AS01	1/3

LC DUPLEXER IDD00741

70 MHz / 120 MHz

Specification


F_o = 70 MHz / 120 MHz

ANT to Rx		Minimum	Typical	Maximum
Insertion loss (70 MHz +/-2.5 MHz)	dB	-	1.7	2.0
Amplitude Ripple (70 MHz +/-2.5 MHz)	dB	-	0.5	0.7
VSWR (70 MHz +/-2.5 MHz)	-	-	1.2	1.4
Input power (70 MHz +/-2.5 MHz)	Watt	3W > 50000 Hours, CW tone (Ta=+50°C)		
Relative Attenuation 117.5 ~ 122.5 MHz	dB	45	48	-

Tx to ANT		Minimum	Typical	Maximum
Insertion loss (120 MHz +/-2.5 MHz)	dB	-	1.7	2.0
Amplitude Ripple (120 MHz +/-2.5 MHz)	dB	-	0.5	0.7
VSWR (120 MHz +/-2.5 MHz)	-	-	1.2	1.4
Input power (120 MHz +/-2.5 MHz)	Watt	3W > 50000 Hours, CW tone (Ta=+50°C)		
Relative Attenuation 67.5 ~ 72.5 MHz	dB	45	48	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 3 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured absolute to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD00741	
		Rev. Date	2014-9-03	
		Rev.	AS01	2/3

LC DUPLEXER IDD00741


70 MHz / 120 MHz


Frequency Response

Ant to Rx

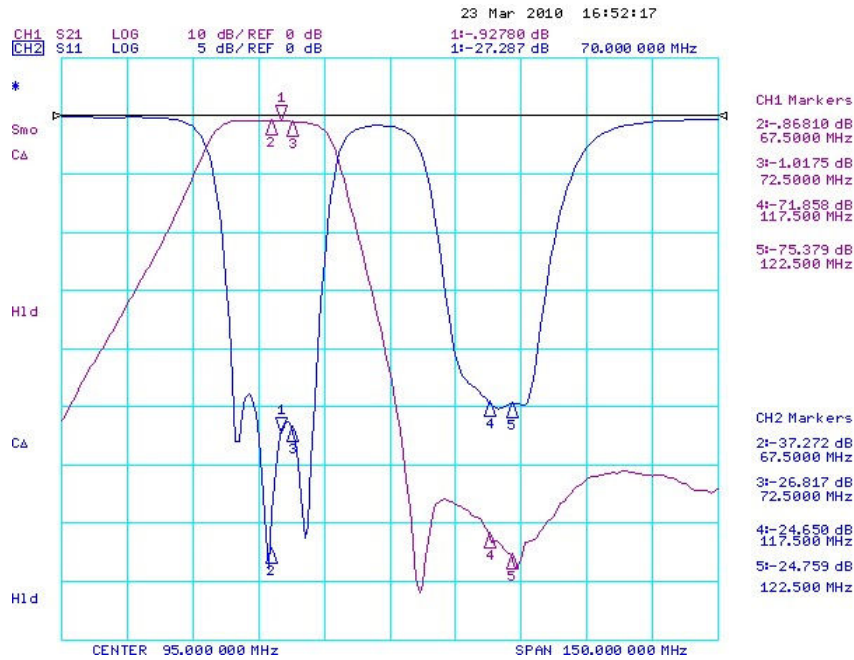

Tx to Ant

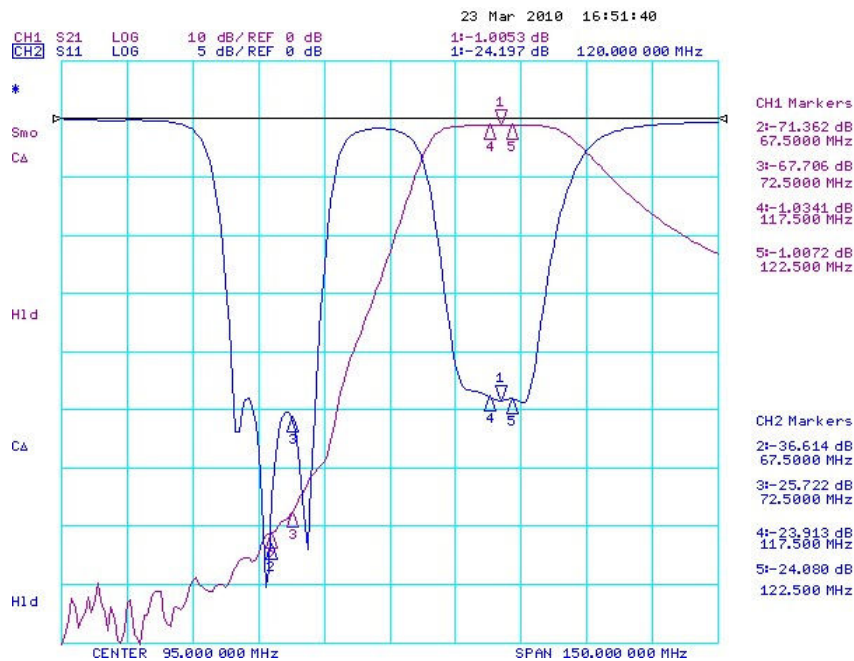

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	IDD00741	
		Rev. Date	2014-9-03	
		Rev.	AS01	3/3