


SAW Bandpass Filter 270401B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

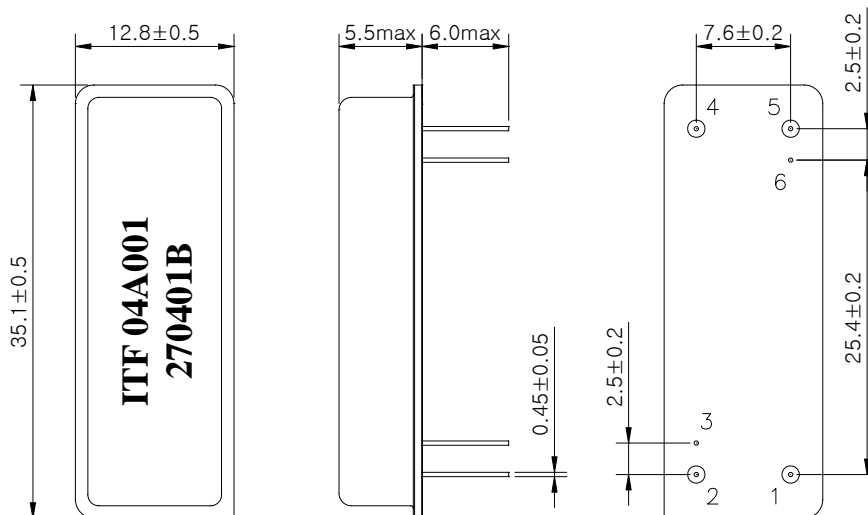

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270401B	
		Rev. Date	2004-06-16	
		Rev.	NM4014-CS01	1/5

SAW Bandpass Filter 270401B



3. Specifications

Fo = 70.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	69.95	70.0	70.05
Insertion Loss	dB	-	25.0	26.0
1dB Bandwidth	MHz	-	3.92	-
3dB Bandwidth	MHz	4.0	4.12	-
40dB Bandwidth	MHz	-	4.9	5.2
Amplitude Ripple (Fo +/- 1.845 MHz)	dB	-	0.8	1.0
Group Delay Variation (Fo +/- 1.845 MHz)	nsec	-	110	310
Absolute Delay	usec	-	4.2	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-23	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270401B	
		Rev. Date	2004-06-16	
		Rev.	NM4014-CS01	2/5

SAW Bandpass Filter 270401B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

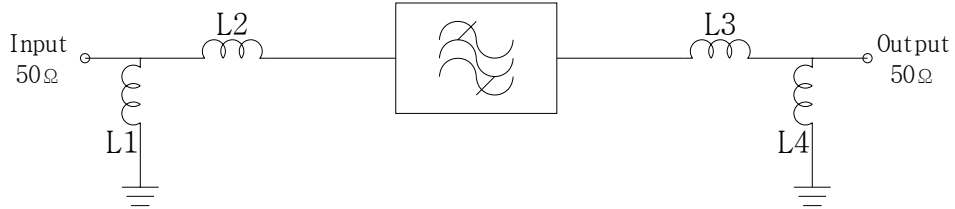

$$L2 = L3 = 22 \text{ nH,}$$

$$L1 = L4 = 68 \text{ nH}$$

5. Marking Configuration


ITF¹⁾ 04A001²⁾

270401B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270401B	
		Rev. Date	2004-06-16	
		Rev.	NM4014-CS01	3/5

SAW Bandpass Filter 270401B



6. Typical Performance (at +25°C)

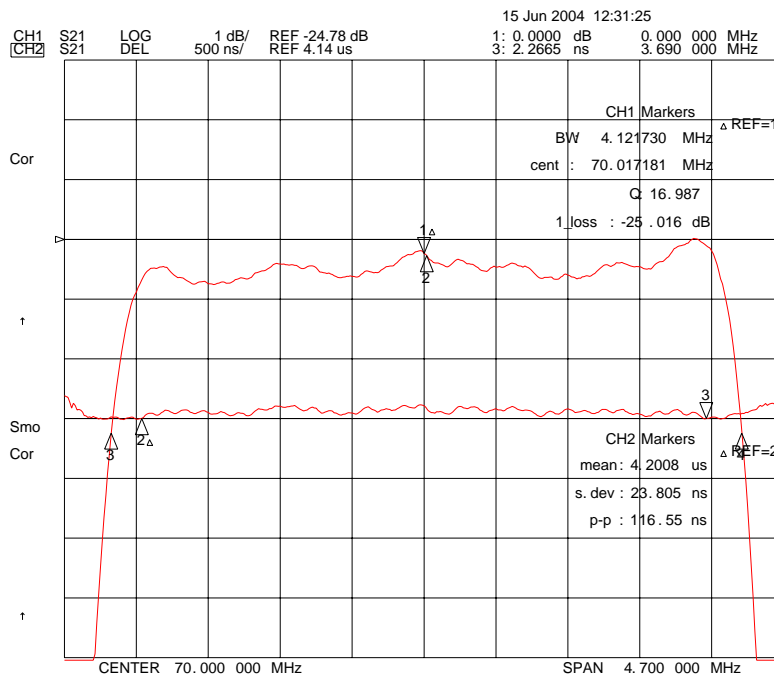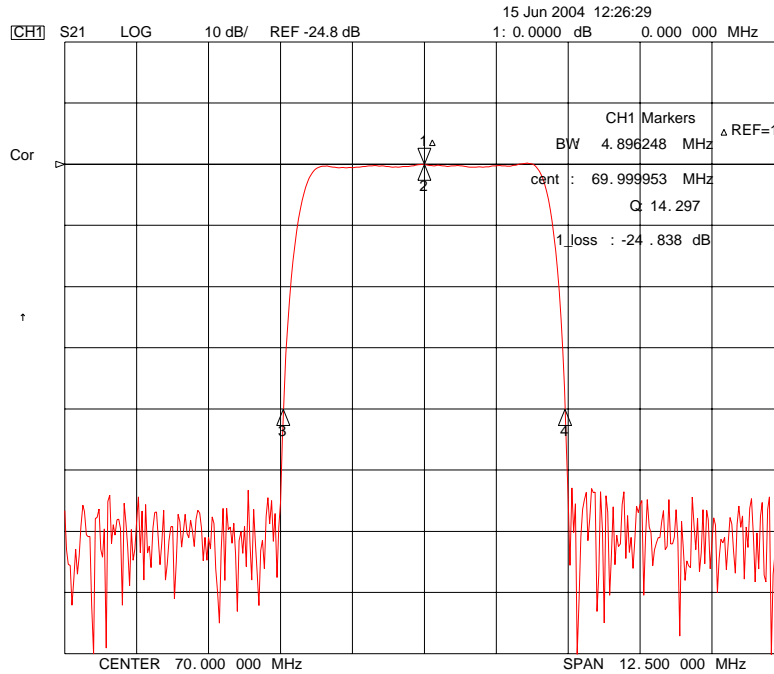





ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No. 270401B

Rev. Date 2004-06-16

Rev. NM4014-CS01 4/5

SAW Bandpass Filter 270401B

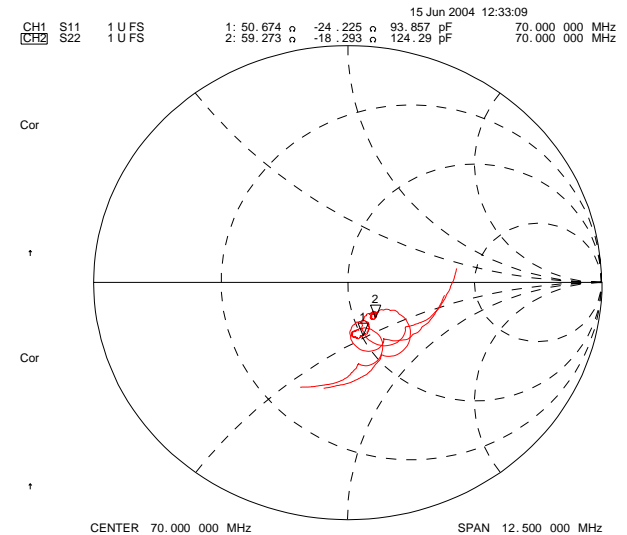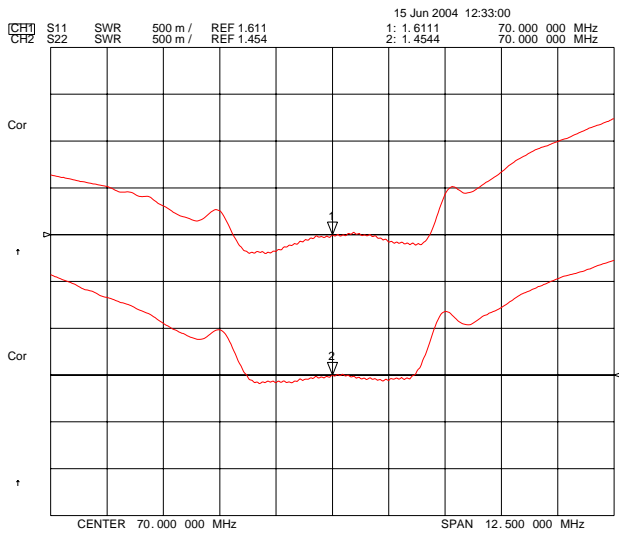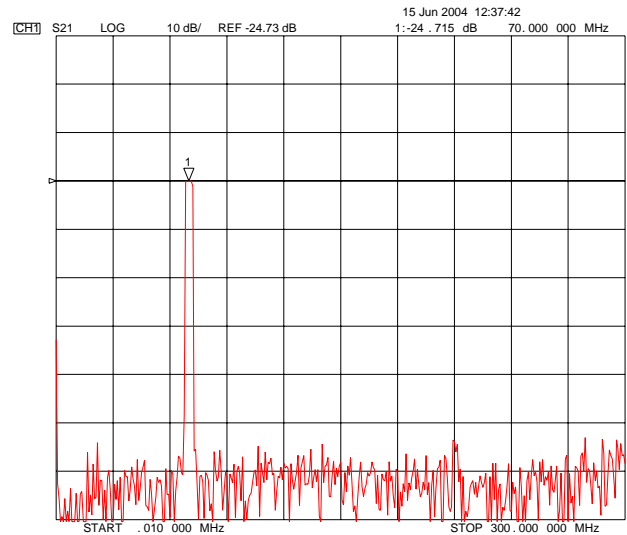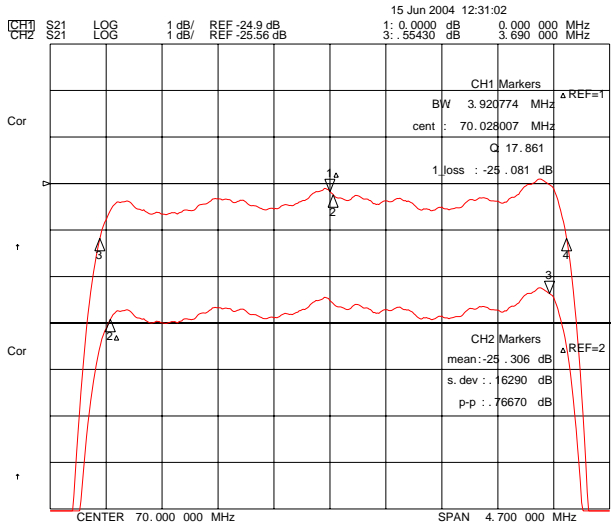

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	270401B	
Rev. Date	2004-06-16	
Rev.	NM4014-CS01	5/5