


SAW Bandpass Filter 252905B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

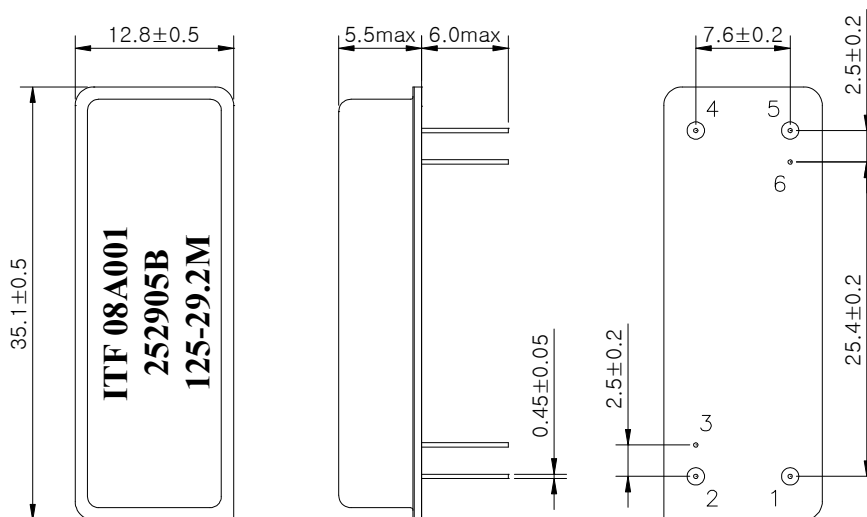

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252905B	
		Rev. Date	2009-04-28	
		Rev.	NM8077-CS02	1/5

SAW Bandpass Filter 252905B



3. Specifications

Fo = 125.0 MHz

Terminating source impedance : 50Ω and matching network


Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	125.0	-
Insertion Loss	dB	-	34.0	36.0
1dB Bandwidth	MHz	29.15	29.24	-
3dB Bandwidth	MHz	-	29.45	-
50dB Bandwidth	MHz	-	30.37	30.55
Amplitude Ripple (fo ± 14.52 MHz)	dB	-	0.5	1.2
Group Delay Variation (fo ± 14.52 MHz)	nsec	-	30	80
Absolute Delay	usec	-	4.3	-
Ultimate Rejection	dB	58	62	-
Input power	dBm	-	-	10
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

***For Rejection, Smoothing ON**

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252905B	
		Rev. Date	2009-04-28	
		Rev.	NM8077-CS02	2/5

SAW Bandpass Filter 252905B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

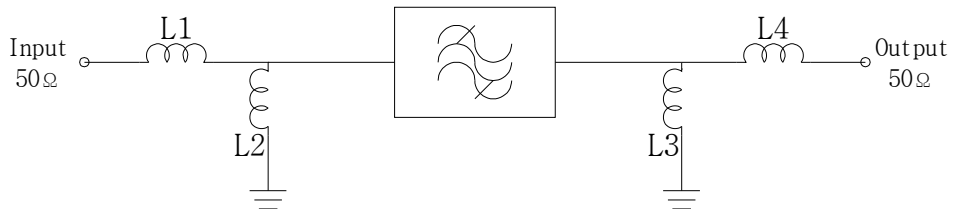

L1 = 56nH, L2 = 68nH

L3 = 82nH, L4 = 56nH


5. Marking Configuration

ITF¹⁾ 08A001²⁾

252905B³⁾

125⁴⁾-29.2M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center frequency
- 5) 1dB-Bandwidth

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	252905B	
		Rev. Date	2009-04-28	
		Rev.	NM8077-CS02	3/5

SAW Bandpass Filter 252905B







6. Typical Performance (at +25°C)

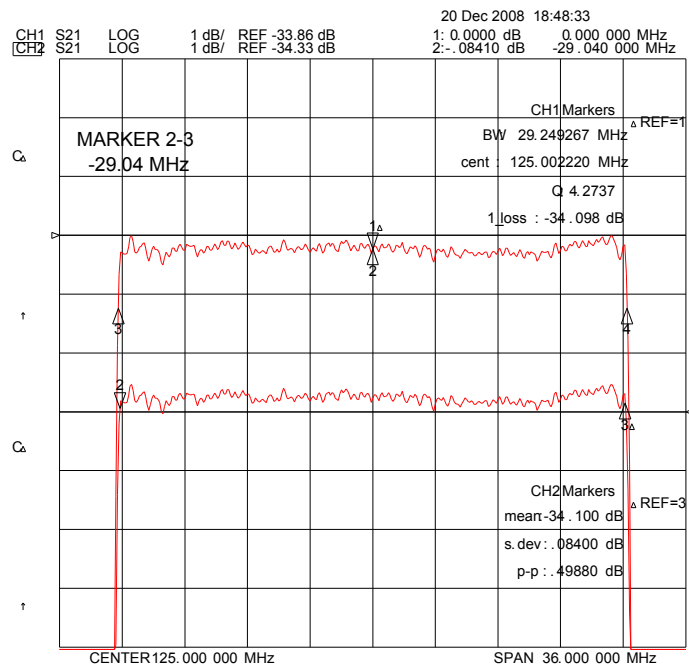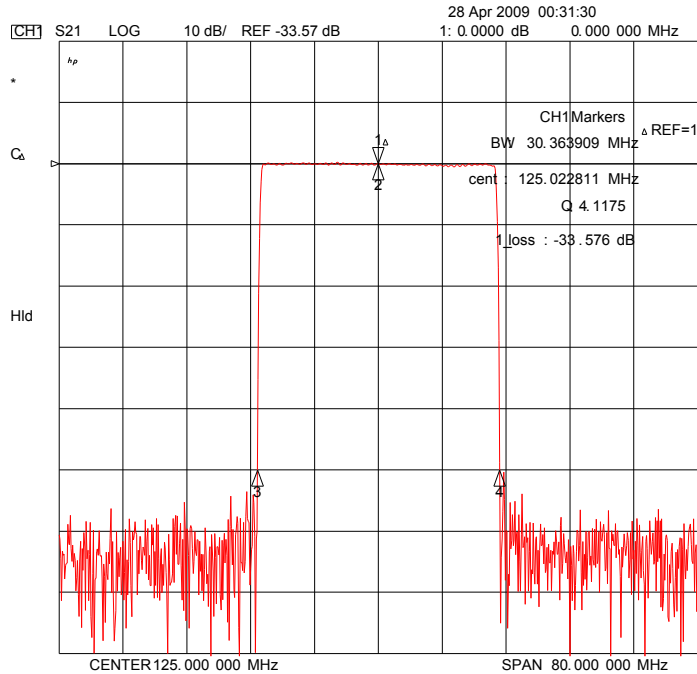

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	252905B	
Rev. Date	2009-04-28	
Rev.	NM8077-CS02	4/5

SAW Bandpass Filter 252905B

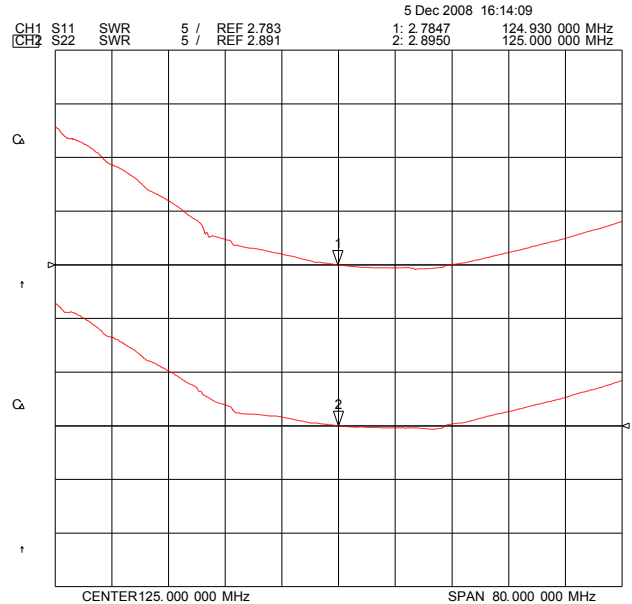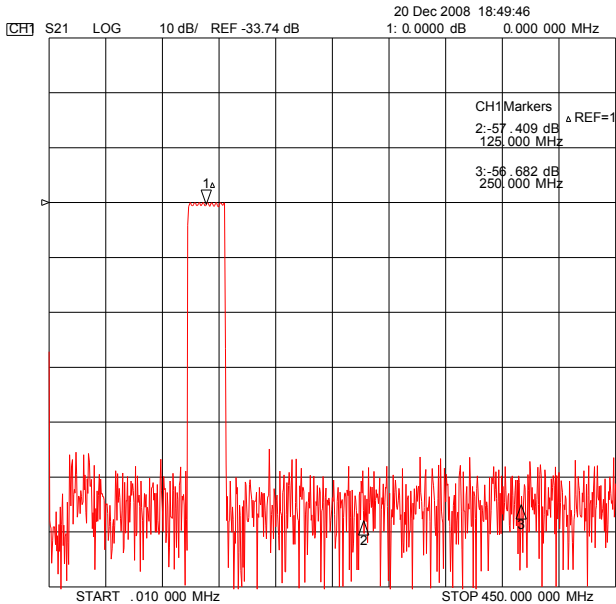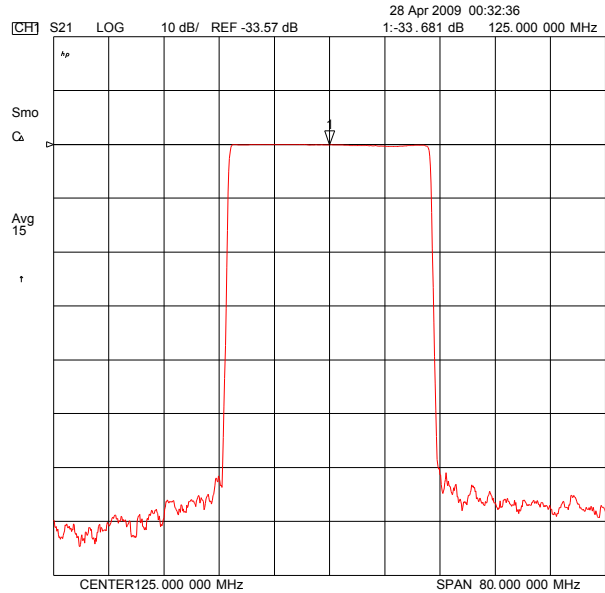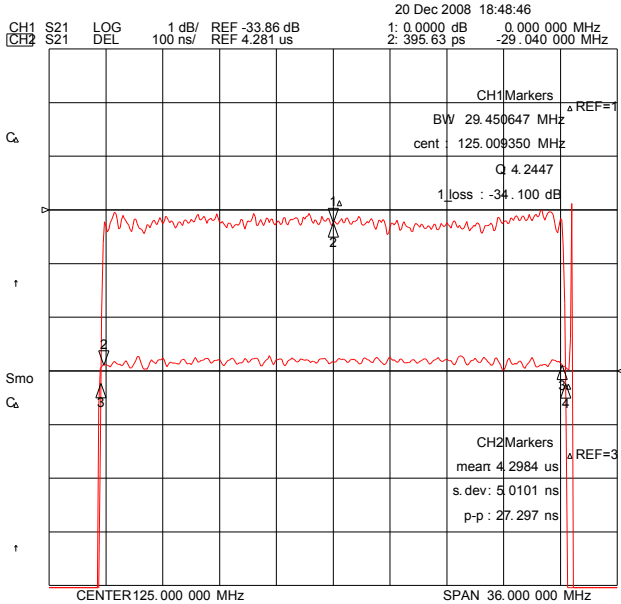

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	252905B	
Rev. Date	2009-04-28	
Rev.	NM8077-CS02	5/5