

1. Features

- Typical 1dB bandwidth of 25.5 MHz
- Low-Loss Filter
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant


Tested by SGS Testing Korea

2. Electrical Specifications


Source and Load Impedance = 50Ω

Room Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	62.5	-
Insertion Loss	dB	-	18.0	20.0
1dB Bandwidth	MHz	25.0	25.5	-
3dB Bandwidth	MHz	-	26.3	-
40dB Bandwidth	MHz	-	30.3	30.8
Amplitude Ripple (fo ± 12.5 MHz)	dB	-	0.8	1.5
Group Delay Variation (fo ± 12.5 MHz)	nsec	-	35	70
Absolute Delay	usec	-	1.2	-
Ultimate Rejection	dB	40	48	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

S1365 Package Dimension

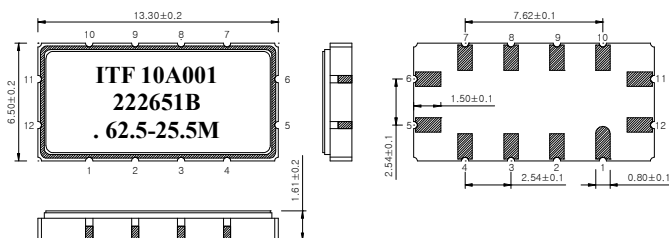

Matching Schematic

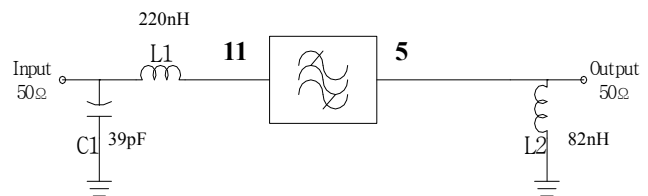

Pin Configuration

Pin Configuration			
Input	11	Ground	6,12
Output	5	Others	Ground

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

3. Typical Performance (at +25°C)

