

1. Features

- Typical 1dB bandwidth of 14.47 MHz
- High attenuation
- Single Ended Operation
- Surface Mounted Package (SMD)

RoHS Compliant

Tested by SGS Testing Korea


2. Electrical Specifications

Source and Load Impedance = 50Ω


Operating Temperature : +25°C

		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	70.0	-
Insertion Loss	dB	-	21.6	23.0
1dB Bandwidth	MHz	14.2	14.47	-
10dB Bandwidth	MHz	-	15.35	15.4
25dB Bandwidth	MHz	-	15.9	16.2
40dB Bandwidth	MHz	-	16.21	18.0
Amplitude Ripple (fo ± 7.02 MHz)	dB	-	0.46	1.0
Group Delay Variation (fo ± 7.02 MHz)	nsec	-	35	80
Absolute Delay	usec	-	2.13	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

S2098 Package Dimension

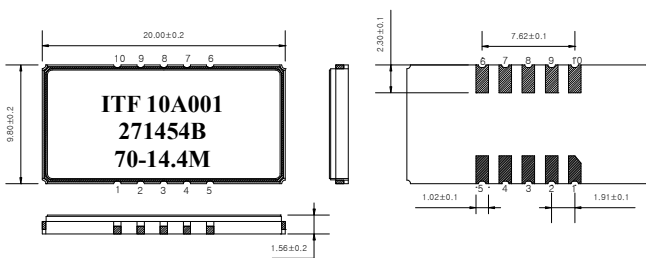

Matching Schematic

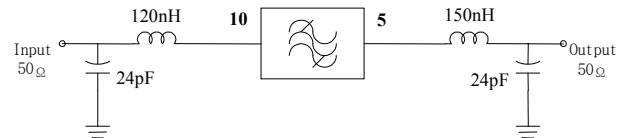

Pin Configuration

Input	1	Ground	2,4
Output	5	Others	Ground

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

3. Typical Performance (at +25°C)

