


# SAW Bandpass Filter 270001B



## 1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

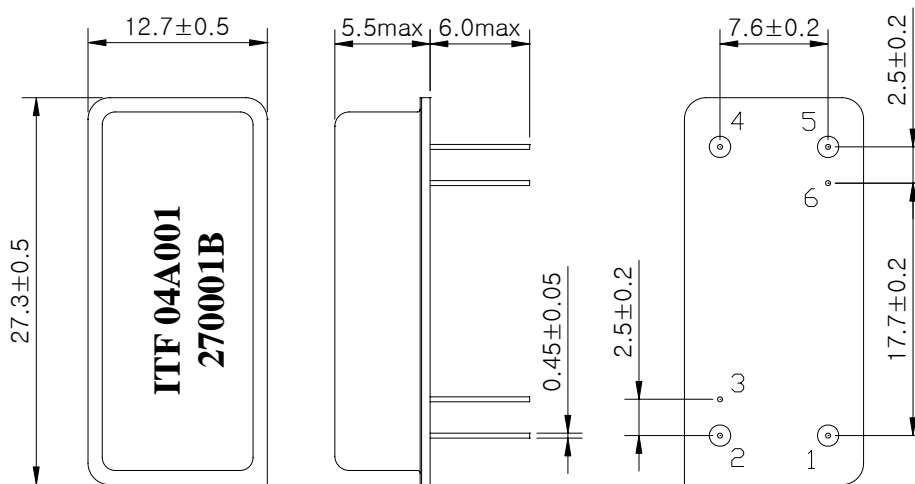

### Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
4	Output
2, 5	Ground
Other	Case ground

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270001B	
		Rev. Date	2004-03-19	
		Rev.	NW3032-CS02	1/5

# SAW Bandpass Filter 270001B



## 3. Specifications

Fo = 70 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10°C ~ +60°C		Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	13.6	16.0
1dB Bandwidth	MHz	-	0.22	-
3dB Bandwidth	MHz	0.25	0.34	-
40dB Bandwidth	MHz	-	0.96	1.0
Amplitude Ripple (Fo +/- 0.08 MHz)	dB	-	0.5	1.0
Group Delay Variation (Fo +/- 0.08MHz)	nsec	-	330	500
Absolute Delay	usec	-	2.95	-
Ultimate Rejection	dB	50	53	-
Temperature Coefficient of Frequency	ppm/°C <sup>2</sup>	-	-0.03	-

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270001B	
		Rev. Date	2004-03-19	
		Rev.	NW3032-CS02	2/5

# SAW Bandpass Filter 270001B



## 4. Matching Schematic


( Actual matching values may vary due to PCB layout and parasitics )

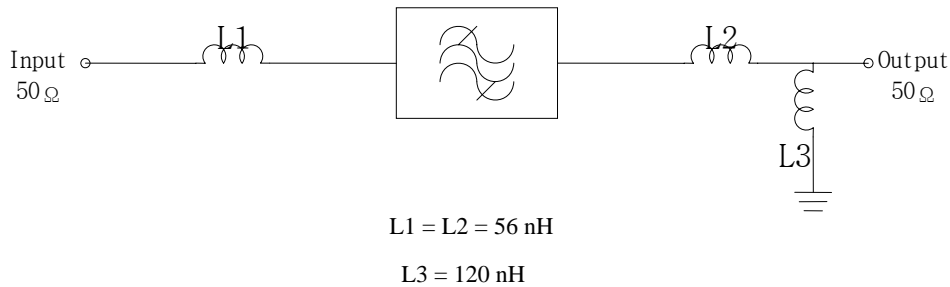

## 5. Marking Configuration

ITF<sup>1)</sup>04A001<sup>2)</sup>  
270001B<sup>3)</sup>



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

 Integrated Technology Future	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	270001B	
		Rev. Date	2004-03-19	
		Rev.	NW3032-CS02	3/5

# SAW Bandpass Filter 270001B



## 6. Typical Performance ( at +25°C )

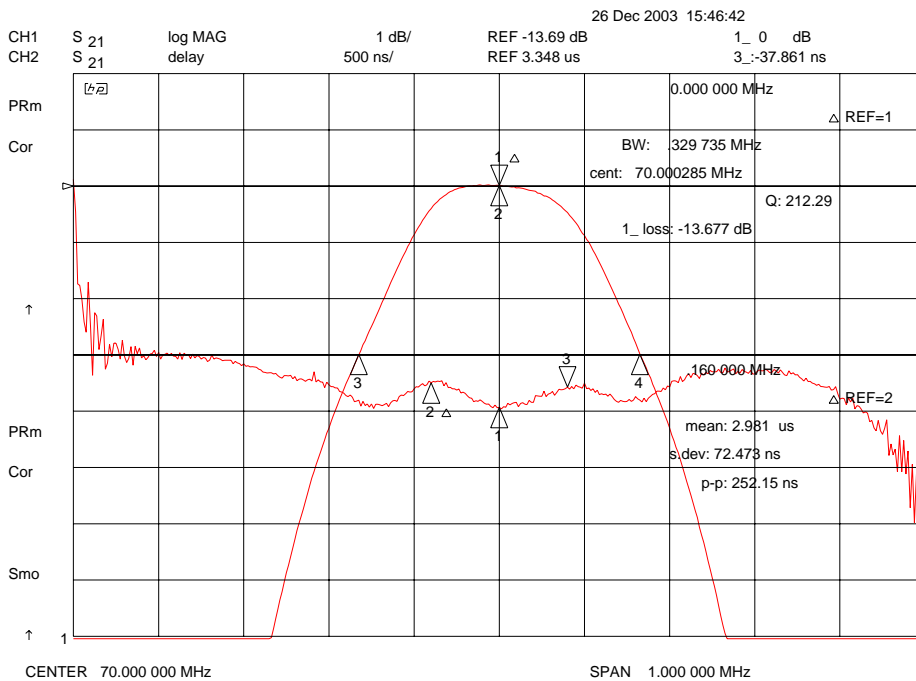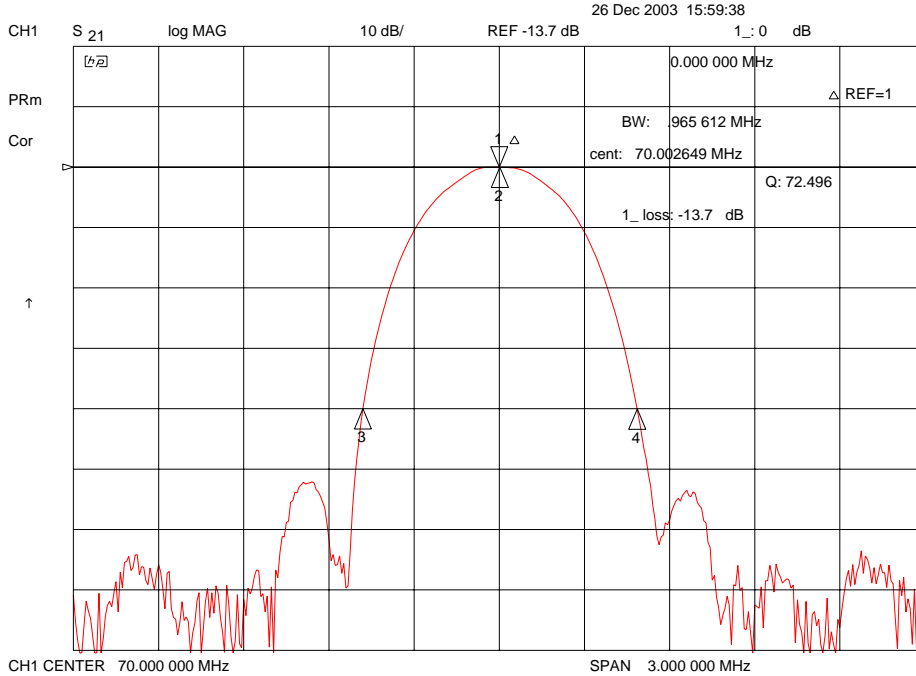





**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No. 270001B

Rev. Date 2004-03-19

Rev. NW3032-CS02 4/5

# SAW Bandpass Filter 270001B

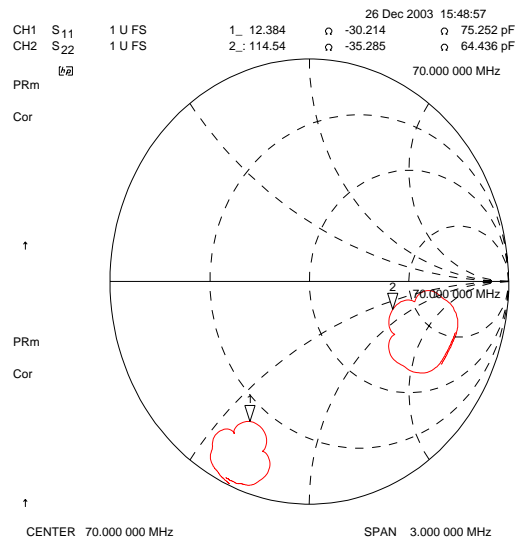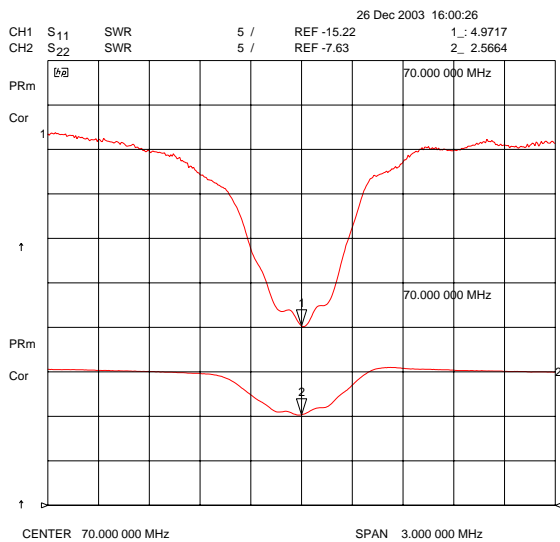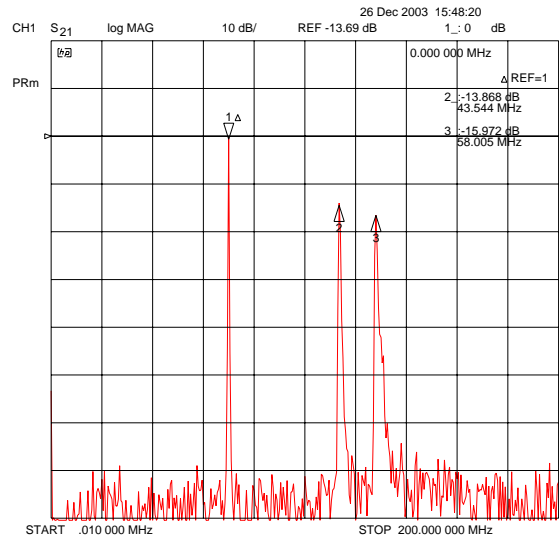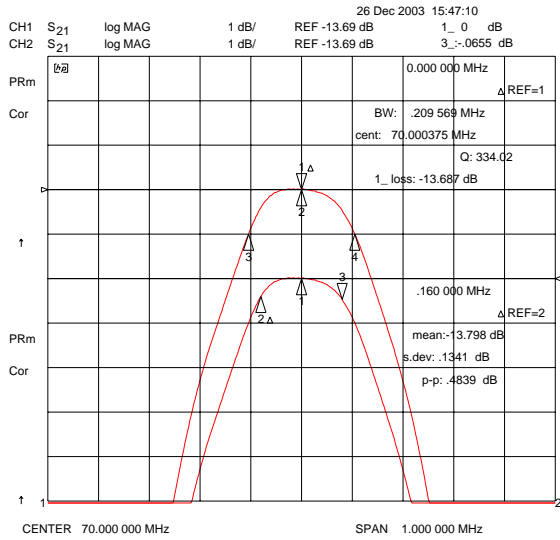

**ITF Co., Ltd.**  
 102-901, Bucheon Technopark 364,  
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,  
 Gyeonggi-Do, Korea 421-809

Part No.	270001B	
Rev. Date	2004-03-19	
Rev.	NW3032-CS02	5/5