


SAW Bandpass Filter 240201B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- Dip Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

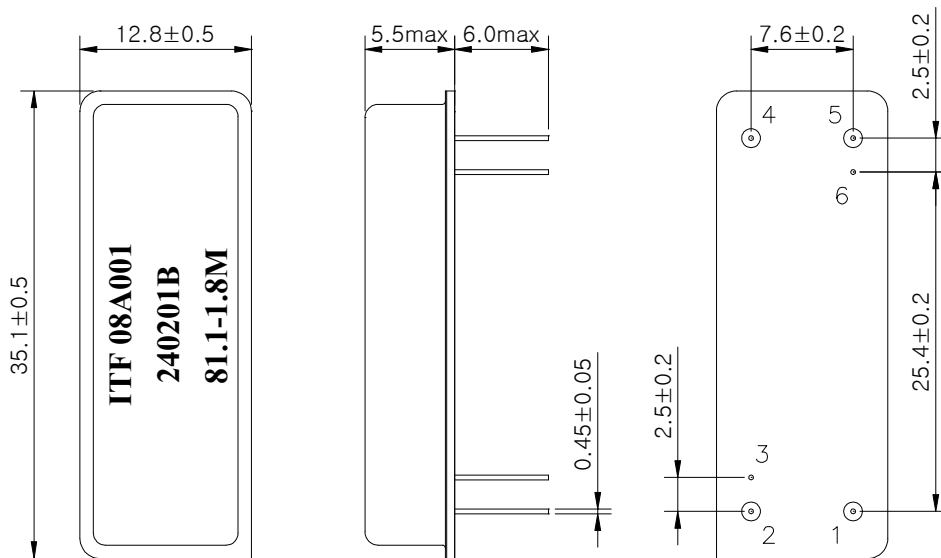

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240201B	
		Rev. Date	2008-11-13	
		Rev.	NW8032-CS01	1/5

SAW Bandpass Filter 240201B



3. Specifications

Fo = 81.1 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	81.1	-
Insertion Loss	dB	-	23.0	25.0
1dB Bandwidth	MHz	1.8	1.85	-
3dB Bandwidth	MHz	-	2.0	-
20dB Bandwidth	MHz	-	2.47	2.6
40dB Bandwidth	MHz	-	2.7	2.8
Amplitude Ripple (Fo +/- 0.8 MHz)	dB	-	0.3	1.0
Group Delay Variation (Fo +/- 0.8 MHz)	nsec	-	135	250
Absolute Delay	usec	-	3.46	-
Ultimate Rejection	dB	50	55	-
Relative Attenuation				
fo+/-900KHz+/-400KHz	dB	20	27	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240201B	
		Rev. Date	2008-11-13	
		Rev.	NW8032-CS01	2/5

SAW Bandpass Filter 240201B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

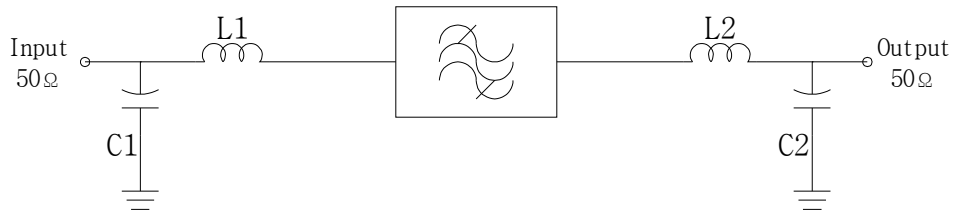

$$L1 = L2 = 220 \text{ nH}$$

$$C1 = C2 = 47 \text{ pF}$$


5. Marking Configuration

ITF¹⁾08A001²⁾

240201B³⁾

81.1⁴⁾-1.8M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240201B	
		Rev. Date	2008-11-13	
		Rev.	NW8032-CS01	3/5

SAW Bandpass Filter 240201B







6. Typical Performance (at +25°C)

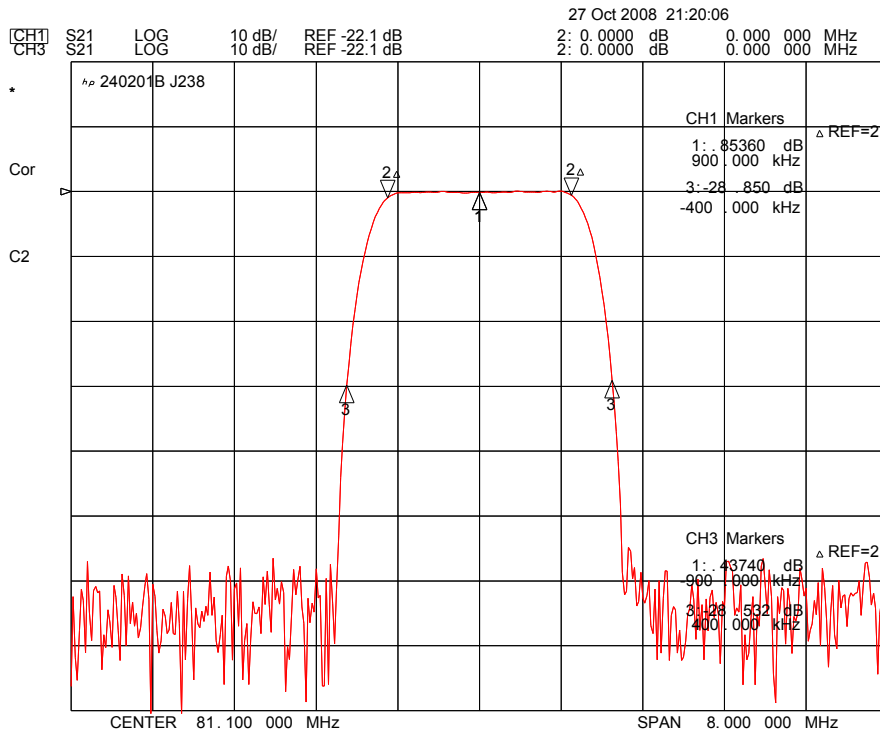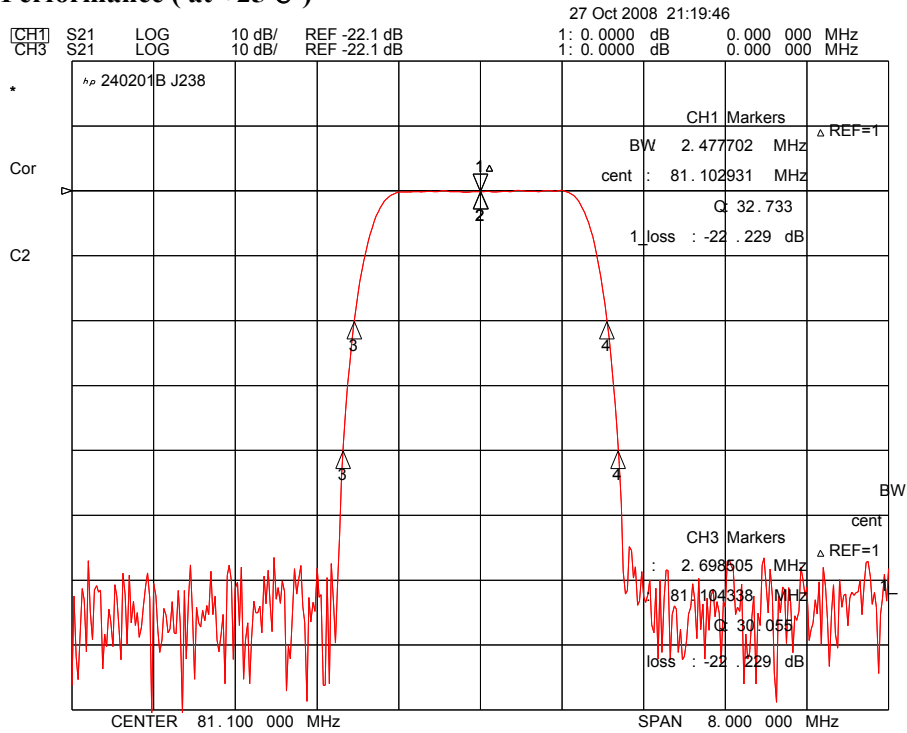

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	240201B	
Rev. Date	2008-11-13	
Rev.	NW8032-CS01	4/5

SAW Bandpass Filter 240201B

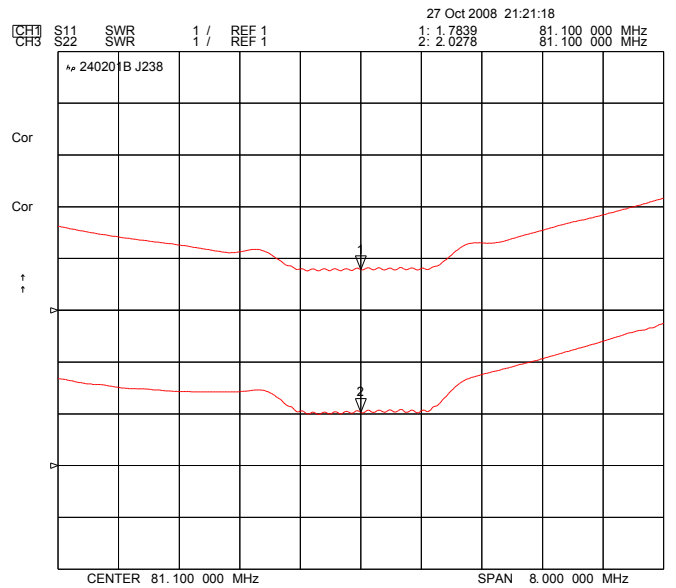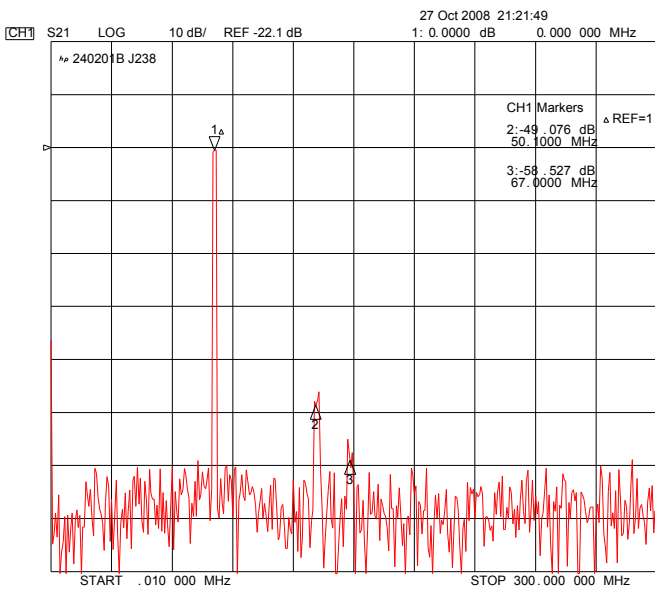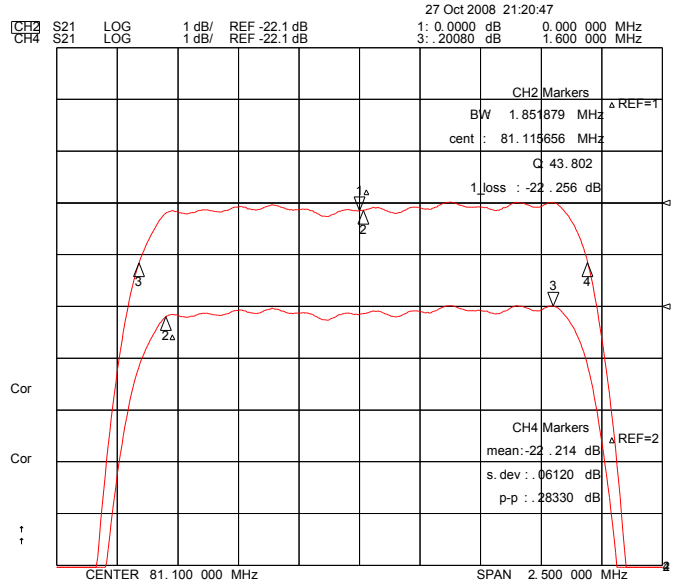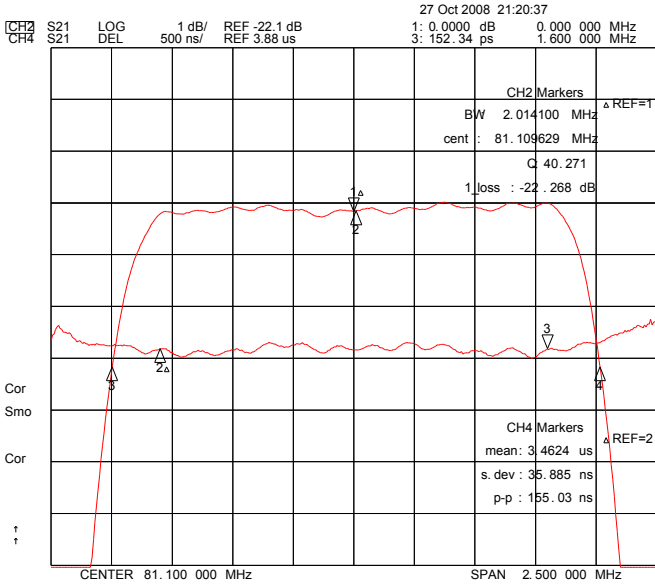

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	240201B		
Rev. Date	2008-11-13		
Rev.	NW8032-CS01	5/5	