


SAW Bandpass Filter 201096B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

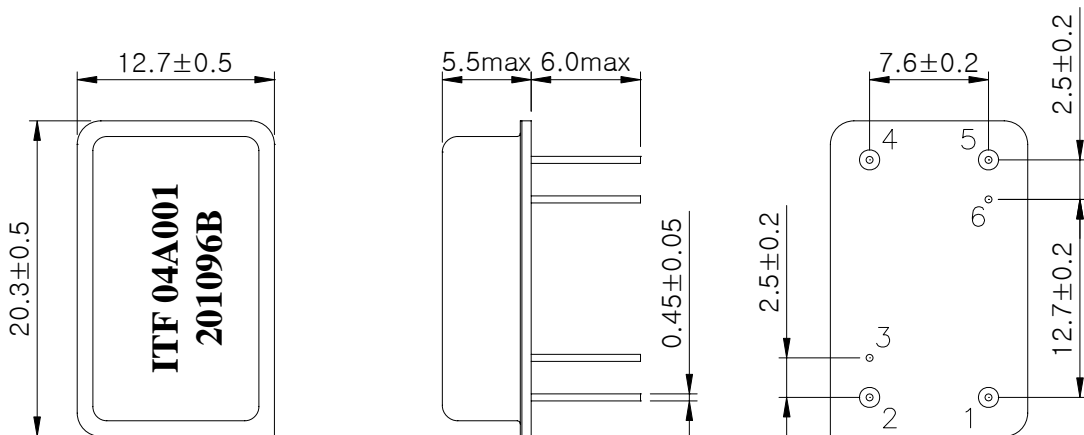

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
Others	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201096B	
		Rev. Date	2004-05-24	
		Rev.	NI0033-CS04	1/5

SAW Bandpass Filter 201096B



3. Specifications

Fo = 70.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	69.96	70.0	70.04
Insertion Loss	dB	-	18.6	20.0
1dB Bandwidth	MHz	-	1.9	-
3dB Bandwidth	MHz	2.0	2.2	-
40dB Bandwidth	MHz	-	3.3	3.45
Amplitude Ripple (Fo +/- 0.75 MHz)	dB	-	0.5	0.75
Group Delay Variation (Fo +/- 0.75 MHz)	nsec	-	150	250.
Absolute Delay	usec	-	2.45	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201096B	
		Rev. Date	2004-05-24	
		Rev.	NI0033-CS04	2/5

SAW Bandpass Filter 201096B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

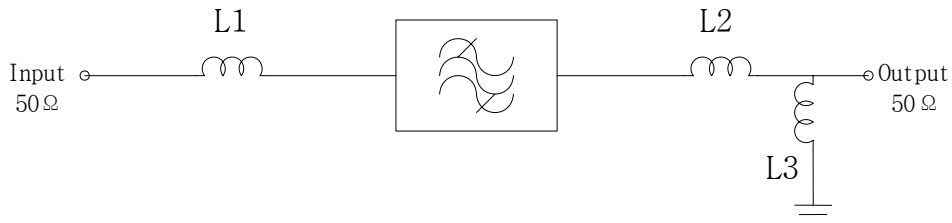

$$L1 = L2 = 390 \text{ nH}$$

$$L3 = 82 \text{ nH}$$

5. Marking Configuration


ITF¹⁾ 04A001²⁾

201096B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201096B	
		Rev. Date	2004-05-24	
		Rev.	NI0033-CS04	3/5

SAW Bandpass Filter 201096B



6. Typical Performance (at +25°C)

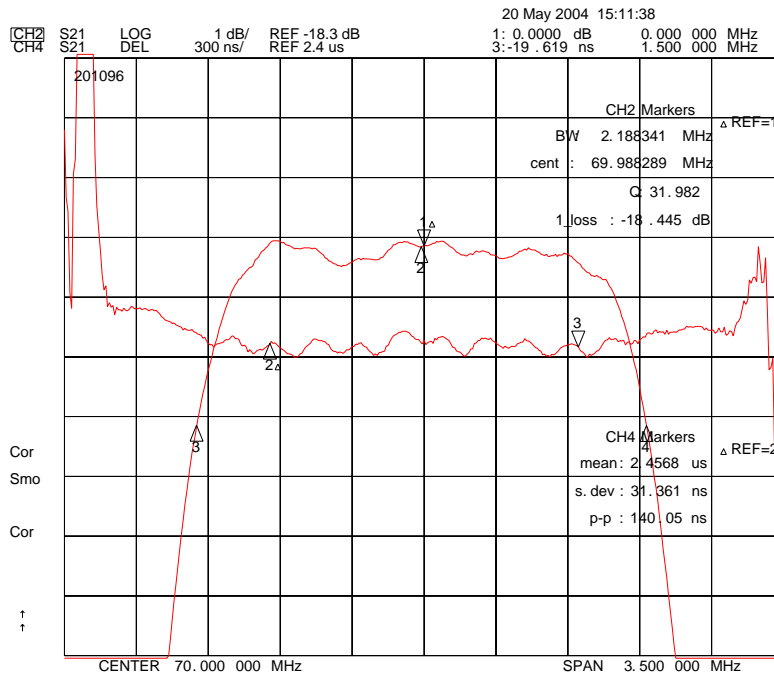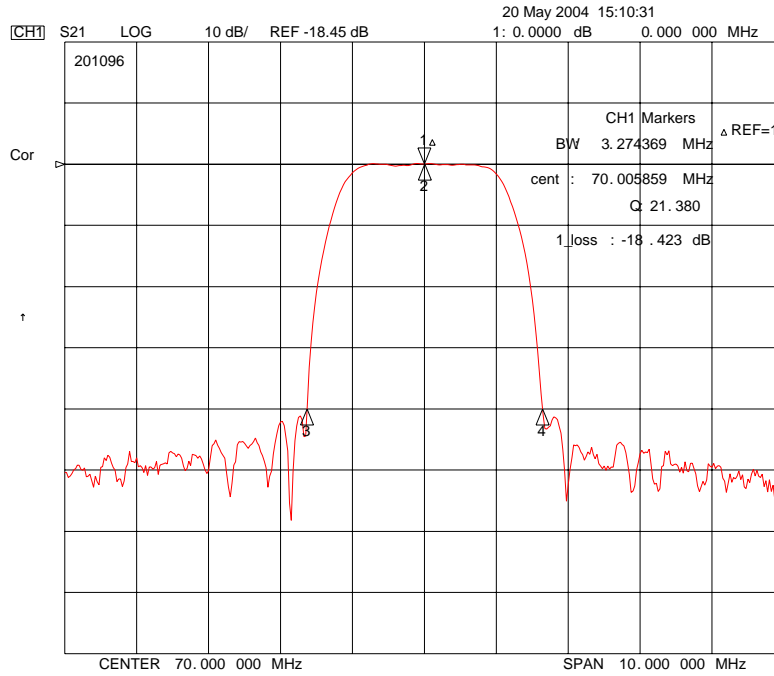





ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No. 201096B

Rev. Date 2004-05-24

Rev. NI0033-CS04 4/5

SAW Bandpass Filter 201096B

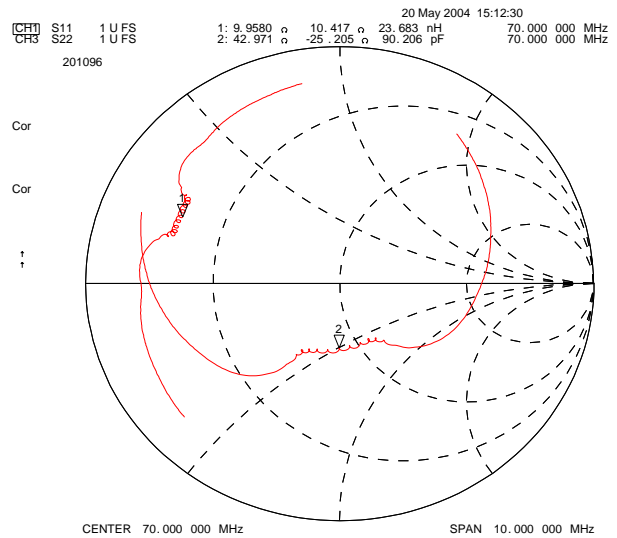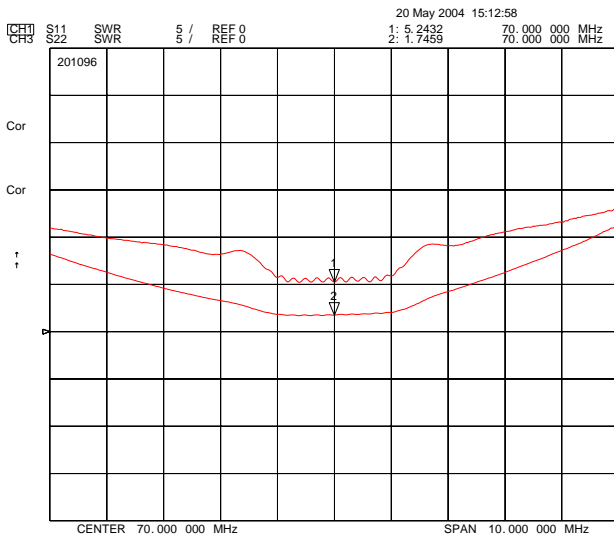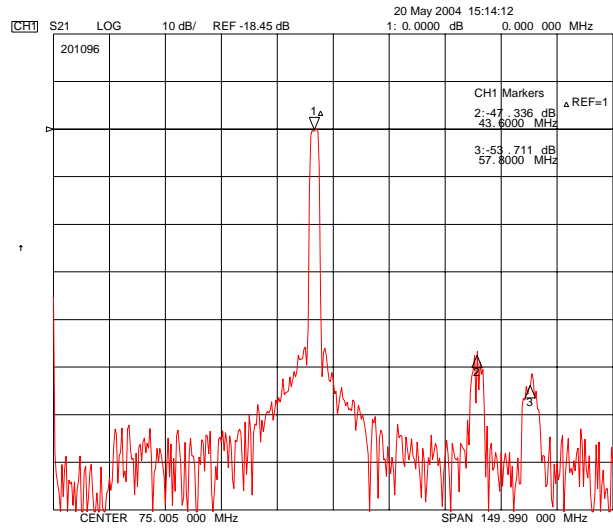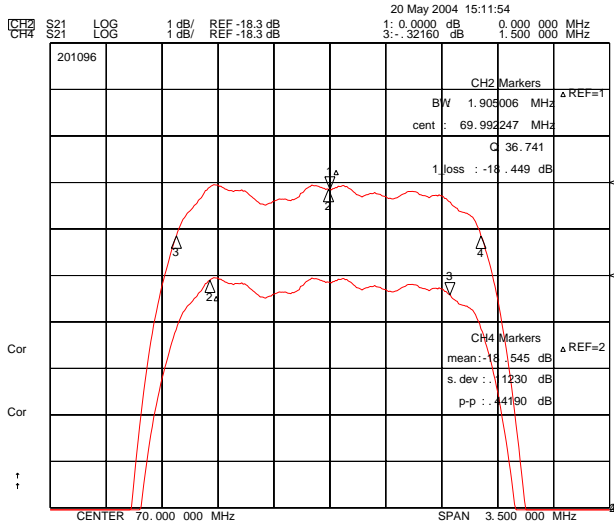

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No. 201096B

Rev. Date 2004-05-24

Rev. NI0033-CS04 5/5